

2011
PLASTIC
HARDWARE
CATALOG



Vaisis

vaisis.com

Contact Us:

Vaisis Inc.

832 Magnolia Ave
Suite 11
Pasadena, CA 91106
United States

Phone: (626)795-6696

Fax: (626)795-6896

Email: sales@vaisis.com

About Us:

Established in 2007, Vaisis takes great pride in offering our US customers high quality plastic hardware products. Our growing product lines include Plastic Circuit Board Hardware, Plastic Fasteners, Cable Management Products, Cable Protection Products and Interconnect Components. Our engineering expertise and fully-equipped facility are capable of providing high quality value-added OEM products to meet your special needs.

Catalog Contents

Circuit Board Hardware

1	Nylon Hex Standoffs
5	Nylon Round Spacers
9	Nylon PCB Supports

Card Guides & Pullers

25	PC Board Card Guides
38	PC Board Pullers/Ejectors

Plastic Fasteners

43	Plastic Snap Rivets
44	Metric Plastic Screws
46	Standard Plastic Screws
48	Plastic Nuts

Cable Management

49	Adhesive Base Wire Saddles & Clamps
69	Snap-In Wire Saddles & Clamps
103	Screw Mount Wire Saddles & Clamps
107	Freestanding Wire Saddles & Clamps
109	Cable Ties & Holders
114	Other Cable Management Accessories

Grommets & Bushings

115	Plastic Grommets & Hole Plugs
116	Nylon Snap Bushings

Didn't find what you are looking for?

Contact us!

Part Number Index

C

CBE

CBE-CP 38–41

CBG

CBG-CF 25

CBG-CG 25, 26–36

CBG-HCG 37

CT-YJ 113

H

HSFF 1–2

HSMF 3–4

P

PCBS

PCBS-A 9

PCBS-ACBS 18–19

PCBS-B 10

PCBS-C 11

PCBS-D 12

PCBS-E 13

PCBS-FCB 14

PCBS-KCA 11

PCBS-LCA4 10

PCBS-LSA 19

PCBS-LSD 17

PCBS-LT 12

PCBS-LTD 20

PCBS-LTX 24

PCBS-MS 24

PCBS-PCE 9

PCBS-SCB 13

PCBS-SCE 14

PCBS-SCK 14

PCBS-SSBS 23

PCBS-TAA 22

PCBS-TCBS 23

PCBS-UB 15–16

PCG 115

PCM

PCM-2A 107

PCM-A 107

PCM-FCM 108

PCM-HV 108

PCMAH

PCMAH-AB 109

PCMAH-CHF 49–50

PCMAH-CU 58

PCMAH-FB 65

PCMAH-FC 65

PCMAH-FCC 67

PCMAH-FCD 66

PCMAH-FCF 68

PCMAH-FCM 67–68

PCMAH-FCW 64

PCMAH-FDW 57

PCMAH-FSC 57

PCMAH-FW 51–56, 59–60

PCMAH-FWA 62

PCMAH-FWF 63

PCMAH-FWG 58

PCMAH-FWP 60

PCMAH-FWT 64

PCMAH-FWY 67

PCMAH-LFW 59

PCMAH-TLAB 61–62

PCMSP

PCMSP-CC 80

PCMSP-CCA 88

PCMSP-CCD 80

PCMSP-CD 79

PCMSP-CH 69–70, 71, 73, 74, 77, 90

PCMSP-CHB 76

PCMSP-CHJ 75

PCMSP-CHM 77

PCMSP-CHN 71

PCMSP-CHP 97

PCMSP-CHQ 102

PCMSP-CHR 75

PCMSP-CHX 76

PCMSP-CHY 92

PCMSP-CIC 92

PCMSP-CK 74

PCMSP-CKA 101

PCMSP-CKB 101

PCMSP-CKF 97

PCMSP-CKH 76

PCMSP-CKK 94–95

PCMSP-CKQ 98

PCMSP-CM 73

PCMSP-CMC 71

PCMSP-CS 87, 91

PCMSP-CU 78, 92

PCMSP-FAA 96

PCMSP-FC 99

PCMSP-FCC 95, 100

PCMSP-FW 81

PCMSP-FWD 80

PCMSP-FWH 96

PCMSP-FWQ 81

PCMSP-FWW 81

PCMSP-LFC 99

PCMSP-PC 89

PCMSP-PCS 93

PCMSP-PDT 89

PCMSP-TA 82–83, 88, 91

PCMSP-TB 84

PCMSP-TC20 87

PCMSP-TD 85

PCMSP-TDA 72

PCMSP-TDY 85–86

PCMSP-TE21 86

PCMSP-TG12 101

PCMSP-TK6 84

PCMSP-TU14 72

PCMSP-TUA 79

PCMSP-TUT 87

PCMSP-YL 111

PCMSP-YLA 111

PCMSW

PCMSW-CHF 103, 106

PCMSW-CNF 106

PCMSW-PC 102, 104

PCMSW-PCT 106

PCMSW-PL 105

PCP

PCP-M 115

PCP-SA 116

PCP-SB 116, 117

PFTH

PFTH 110

PSN

PSN 48

PSR

PSR 43

PSS

PSS Metric 44–45

PSS Standard 46–47

PTH

PTH 112

R

S


SHW 114

SRS-SS 21

SSRS-SS 22

Standard Hex Standoff


HSFF Series, Female-Female



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Available Thread Sizes: 2-56, 4-40, 6-32, 8-32
Customized Length: Available



Part Number	Length "L", mm [in.]	Standard Package
Thread Size = 2-56 O.D. = 4.8 mm [0.187 in.]		2-56
HSFF-256-0094	2.4 [0.094]	2000
HSFF-256-0125	3.2 [0.125]	
HSFF-256-0156	4.0 [0.156]	
HSFF-256-0188	4.8 [0.188]	
HSFF-256-0219	5.6 [0.219]	
HSFF-256-0250	6.4 [0.250]	
HSFF-256-0281	7.1 [0.281]	
HSFF-256-0313	7.9 [0.313]	
HSFF-256-0344	8.7 [0.344]	
HSFF-256-0375	9.5 [0.375]	
HSFF-256-0406	10.3 [0.406]	
HSFF-256-0438	11.1 [0.438]	
HSFF-256-0469	11.9 [0.469]	
HSFF-256-0500	12.7 [0.500]	
HSFF-256-0563	14.3 [0.563]	
Thread Size = 4-40 O.D. = 6.4 mm [0.250 in.]		
HSFF-440-0188	4.8 [0.188]	2000
HSFF-440-0219	5.6 [0.219]	
HSFF-440-0250	6.4 [0.250]	
HSFF-440-0281	7.1 [0.281]	
HSFF-440-0313	7.9 [0.313]	
HSFF-440-0344	8.7 [0.344]	
HSFF-440-0375	9.5 [0.375]	
HSFF-440-0406	10.3 [0.406]	
HSFF-440-0438	11.1 [0.438]	1000
HSFF-440-0469	11.9 [0.469]	
HSFF-440-0500	12.7 [0.500]	
HSFF-440-0563	14.3 [0.563]	
HSFF-440-0625	15.9 [0.625]	
HSFF-440-0688	17.5 [0.688]	
HSFF-440-0750	19.1 [0.750]	
HSFF-440-0813	20.6 [0.813]	
HSFF-440-0875	22.2 [0.875]	
HSFF-440-0938	23.8 [0.938]	
HSFF-440-1000	25.4 [1.000]	
HSFF-440-1125	28.6 [1.125]	
HSFF-440-1250	31.8 [1.250]	
HSFF-440-1375	34.9 [1.375]	

Part Number	Length "L", mm [in.]	Standard Package
Thread Size = 6-32 O.D. = 6.4 mm [0.250 in.]		
HSFF-632-0250	6.4 [0.250]	2000
HSFF-632-0281	7.1 [0.281]	
HSFF-632-0313	7.9 [0.313]	
HSFF-632-0344	8.7 [0.344]	
HSFF-632-0375	9.5 [0.375]	
HSFF-632-0406	10.3 [0.406]	
HSFF-632-0438	11.1 [0.438]	
HSFF-632-0469	11.9 [0.469]	
HSFF-632-0500	12.7 [0.500]	
HSFF-632-0563	14.3 [0.563]	
HSFF-632-0625	15.9 [0.625]	
HSFF-632-0688	17.5 [0.688]	
HSFF-632-0750	19.1 [0.750]	1000
HSFF-632-0813	20.6 [0.813]	
HSFF-632-0875	22.2 [0.875]	
HSFF-632-0938	23.8 [0.938]	
HSFF-632-1000	25.4 [1.000]	
HSFF-632-1125	28.6 [1.125]	
HSFF-632-1250	31.8 [1.250]	
HSFF-632-1375	34.9 [1.375]	

Part Number	Length "L", mm [in.]	Standard Package
Thread Size = 8-32 O.D. = 6.4 mm [0.250 in.]		
HSFF-832-0250	6.4 [0.250]	2000
HSFF-832-0281	7.1 [0.281]	
HSFF-832-0313	7.9 [0.313]	
HSFF-832-0344	8.7 [0.344]	
HSFF-832-0375	9.5 [0.375]	
HSFF-832-0406	10.3 [0.406]	
HSFF-832-0438	11.1 [0.438]	
HSFF-832-0469	11.9 [0.469]	
HSFF-832-0500	12.7 [0.500]	
HSFF-832-0563	14.3 [0.563]	
HSFF-832-0625	15.9 [0.625]	
HSFF-832-0688	17.5 [0.688]	
HSFF-832-0750	19.1 [0.750]	1000
HSFF-832-0813	20.6 [0.813]	
HSFF-832-0875	22.2 [0.875]	
HSFF-832-0938	23.8 [0.938]	
HSFF-832-1000	25.4 [1.000]	
HSFF-832-1125	28.6 [1.125]	
HSFF-832-1250	31.8 [1.250]	
HSFF-832-1375	34.9 [1.375]	

Custom Order Options:

Material: Nylon 66/Polycarbonate (PC)
UL Rating: 94V-2/94V-0
Color: Natural/Black
Length: Customized
Thread Sizes: 2-56, 4-40, 6-32, 8-32,
 Unthreaded (For Self-Tapping Screws)


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Metric Hex Standoff


HSFF Series, Female-Female



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Available Thread Sizes: M2, M2.5, M3, M4, M5
Customized Length: Available



Part Number	Length "L", mm [in.]	Standard Package
Thread size = M2 x 0.4 mm O.D = 4.5 mm [0.177 in.]		M2
HSFF-M2-020	2.0 [0.079]	2000
HSFF-M2-040	4.0 [0.157]	
HSFF-M2-050	5.0 [0.197]	
HSFF-M2-064	6.4 [0.250]	
HSFF-M2-080	8.0 [0.315]	
HSFF-M2-095	9.5 [0.375]	
HSFF-M2-100	10.0 [0.394]	
HSFF-M2-127	12.7 [0.500]	
HSFF-M2-140	14.0 [0.551]	
HSFF-M2-150	15.0 [0.591]	
Thread size = M2.5 x 0.45 mm O.D = 5.0 mm [0.197 in.]		M2.5
HSFF-M25-025	2.5 [0.098]	2000
HSFF-M25-040	4.0 [0.157]	
HSFF-M25-050	5.0 [0.197]	
HSFF-M25-064	6.4 [0.250]	
HSFF-M25-080	8.0 [0.315]	
HSFF-M25-095	9.5 [0.375]	
HSFF-M25-100	10.0 [0.394]	
HSFF-M25-127	12.7 [0.500]	
HSFF-M25-140	14.0 [0.551]	
HSFF-M25-150	15.0 [0.591]	
Thread size = M3 x 0.5 mm O.D = 5.5 mm [0.217 in.]		M3
HSFF-M3-030	3.0 [0.118]	2000
HSFF-M3-060	6.0 [0.236]	
HSFF-M3-064	6.4 [0.250]	
HSFF-M3-080	8.0 [0.315]	
HSFF-M3-095	9.5 [0.375]	
HSFF-M3-100	10.0 [0.394]	
HSFF-M3-120	12.0 [0.472]	
HSFF-M3-127	12.7 [0.500]	
HSFF-M3-140	14.0 [0.551]	
HSFF-M3-150	15.0 [0.591]	
HSFF-M3-159	15.9 [0.625]	1000

Part Number	Length “L”, mm [in.]	Standard Package
Thread size = M3 x 0.5 mm O.D = 5.5 mm [0.217 in.]		
M3		
HSFF-M3-180	18.0 [0.709]	1000
HSFF-M3-191	19.1 [0.750]	
HSFF-M3-200	20.0 [0.787]	
HSFF-M3-222	22.2 [0.875]	
HSFF-M3-240	24.0 [0.945]	
HSFF-M3-250	25.0 [0.984]	
HSFF-M3-254	25.4 [1.000]	
HSFF-M3-300	30.0 [1.181]	
Thread size = M4 x 0.7 mm O.D = 7.0 mm [0.276 in.]		
M4		
HSFF-M4-060	6.0 [0.236]	1000
HSFF-M4-064	6.4 [0.250]	
HSFF-M4-080	8.0 [0.315]	
HSFF-M4-095	9.5 [0.375]	
HSFF-M4-100	10.0 [0.394]	
HSFF-M4-120	12.0 [0.472]	
HSFF-M4-127	12.7 [0.500]	
HSFF-M4-140	14.0 [0.551]	
HSFF-M4-150	15.0 [0.591]	
HSFF-M4-159	15.9 [0.625]	
HSFF-M4-180	18.0 [0.709]	
HSFF-M4-191	19.1 [0.750]	
HSFF-M4-200	20.0 [0.787]	
HSFF-M4-222	22.2 [0.875]	
HSFF-M4-250	25.0 [0.984]	
HSFF-M4-254	25.4 [1.000]	
HSFF-M4-300	30.0 [1.181]	
HSFF-M4-350	35.0 [1.378]	


Part Number	Length "L", mm [in.]	Standard Package
Thread size = M5 x 0.8 mm O.D = 8.0 mm [0.315 in.] M5		
HSFF-M5-050	5.0 [0.197]	1000
HSFF-M5-060	6.0 [0.236]	
HSFF-M5-064	6.4 [0.250]	
HSFF-M5-080	8.0 [0.315]	
HSFF-M5-095	9.5 [0.375]	
HSFF-M5-100	10.0 [0.394]	
HSFF-M5-120	12.0 [0.472]	
HSFF-M5-127	12.7 [0.500]	
HSFF-M5-140	14.0 [0.551]	
HSFF-M5-150	15.0 [0.591]	
HSFF-M5-159	15.9 [0.625]	
HSFF-M5-160	16.0 [0.630]	
HSFF-M5-180	18.0 [0.709]	
HSFF-M5-191	19.1 [0.750]	
HSFF-M5-200	20.0 [0.787]	
HSFF-M5-222	22.2 [0.875]	
HSFF-M5-250	25.0 [0.984]	
HSFF-M5-254	25.4 [1.000]	
HSFF-M5-300	30.0 [1.181]	

Custom Order Options:

Material: Nylon 66/Polycarbonate (PC)
UL Rating: 94V-2/94V-0
Color: Natural/Black
Length: Customized
Thread Sizes: M2, M2.5, M3, M4, M5
 Unthreaded (For Self-Tapping Screws)

Standard Hex Standoff


HSMF Series, Male-Female



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Available Thread Sizes: 4-40, 6-32, 8-32
Customized Length: Available



Part Number	Length "L", mm [in.]	Standard Package
Thread Size = 4-40 O.D. = 6.4 mm [0.250 in.]		4-40
HSMF-440-0188	4.8 [0.188]	2000
HSMF-440-0219	5.6 [0.219]	
HSMF-440-0250	6.4 [0.250]	
HSMF-440-0281	7.1 [0.281]	
HSMF-440-0313	7.9 [0.313]	
HSMF-440-0344	8.7 [0.344]	
HSMF-440-0375	9.5 [0.375]	
HSMF-440-0406	10.3 [0.406]	
HSMF-440-0438	11.1 [0.438]	1000
HSMF-440-0469	11.9 [0.469]	
HSMF-440-0500	12.7 [0.500]	
HSMF-440-0563	14.3 [0.563]	
HSMF-440-0625	15.9 [0.625]	
HSMF-440-0688	17.5 [0.688]	
HSMF-440-0750	19.1 [0.750]	
HSMF-440-0813	20.6 [0.813]	
HSMF-440-0875	22.2 [0.875]	
HSMF-440-0938	23.8 [0.938]	
HSMF-440-1000	25.4 [1.000]	
HSMF-440-1125	28.6 [1.125]	
HSMF-440-1250	31.8 [1.250]	
HSMF-440-1375	34.9 [1.375]	

Part Number	Length "L", mm [in.]	Standard Package
Thread Size = 6-32 O.D. = 6.4 mm [0.250 in.]		6-32
HSMF-632-0250	6.4 [0.250]	2000
HSMF-632-0281	7.1 [0.281]	
HSMF-632-0313	7.9 [0.313]	
HSMF-632-0344	8.7 [0.344]	
HSMF-632-0375	9.5 [0.375]	
HSMF-632-0406	10.3 [0.406]	
HSMF-632-0438	11.1 [0.438]	
HSMF-632-0469	11.9 [0.469]	1000
HSMF-632-0500	12.7 [0.500]	
HSMF-632-0563	14.3 [0.563]	
HSMF-632-0625	15.9 [0.625]	
HSMF-632-0688	17.5 [0.688]	
HSMF-632-0750	19.1 [0.750]	
HSMF-632-0813	20.6 [0.813]	
HSMF-632-0875	22.2 [0.875]	
HSMF-632-0938	23.8 [0.938]	
HSMF-632-1000	25.4 [1.000]	
HSMF-632-1125	28.6 [1.125]	
HSMF-632-1250	31.8 [1.250]	
HSMF-632-1375	34.9 [1.375]	


Part Number	Length "L", mm [in.]	Standard Package
Thread Size = 8-32 O.D. = 6.4 mm [0.250 in.]		8-32
HSMF-832-0250	6.4 [0.250]	2000
HSMF-832-0281	7.1 [0.281]	
HSMF-832-0313	7.9 [0.313]	
HSMF-832-0344	8.7 [0.344]	
HSMF-832-0375	9.5 [0.375]	
HSMF-832-0406	10.3 [0.406]	
HSMF-832-0438	11.1 [0.438]	
HSMF-832-0469	11.9 [0.469]	1000
HSMF-832-0500	12.7 [0.500]	
HSMF-832-0563	14.3 [0.563]	
HSMF-832-0625	15.9 [0.625]	
HSMF-832-0688	17.5 [0.688]	
HSMF-832-0750	19.1 [0.750]	
HSMF-832-0813	20.6 [0.813]	
HSMF-832-0875	22.2 [0.875]	
HSMF-832-0938	23.8 [0.938]	
HSMF-832-1000	25.4 [1.000]	
HSMF-832-1125	28.6 [1.125]	
HSMF-832-1250	31.8 [1.250]	
HSMF-832-1375	34.9 [1.375]	

Custom Order Options:

Material: Nylon 66/Polycarbonate (PC)
UL Rating: 94V-2/94V-0
Color: Natural/Black
Length: Customized
Thread Sizes: 4-40, 6-32, 8-32,
 Unthreaded (For Self-Tapping Screws)

Metric Hex Standoff


HSMF Series, Male-Female



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Available Thread Sizes: M2, M2.5, M3, M4, M5
Customized Length: Available



Part Number	Length "L", mm [in.]	Ref. "T", mm [in.]	Std. Pkg.
Thread Size = M2 x 0.4mm O.D. = 4.0 mm [0.157 in.]			M2
HSMF-M2-040	4.0 [0.157]	5.0 [0.197]	2000
HSMF-M2-050	5.0 [0.197]	5.0 [0.197]	
HSMF-M2-060	6.0 [0.236]	5.0 [0.197]	
HSMF-M2-064	6.4 [0.250]	5.0 [0.197]	
HSMF-M2-080	8.0 [0.315]	5.0 [0.197]	
HSMF-M2-095	9.5 [0.375]	5.0 [0.197]	
HSMF-M2-100	10.0 [0.394]	5.0 [0.197]	
HSMF-M2-120	12.0 [0.472]	5.0 [0.197]	
HSMF-M2-127	12.7 [0.500]	5.0 [0.197]	
HSMF-M2-140	14.0 [0.551]	5.0 [0.197]	
HSMF-M2-150	15.0 [0.591]	5.0 [0.197]	
Thread Size = M2.5 x 0.45mm O.D. = 5.0 mm [0.197 in.]			
HSMF-M25-050	5.0 [0.197]	5.0 [0.197]	2000
HSMF-M25-060	6.0 [0.236]	5.0 [0.197]	
HSMF-M25-064	6.4 [0.250]	5.0 [0.197]	
HSMF-M25-080	8.0 [0.315]	5.0 [0.197]	
HSMF-M25-095	9.5 [0.375]	5.0 [0.197]	
HSMF-M25-100	10.0 [0.394]	5.0 [0.197]	
HSMF-M25-120	12.0 [0.472]	5.0 [0.197]	
HSMF-M25-127	12.7 [0.500]	5.0 [0.197]	
HSMF-M25-140	14.0 [0.551]	5.0 [0.197]	
HSMF-M25-150	15.0 [0.591]	5.0 [0.197]	
Thread Size = M3 x 0.5 mm O.D. = 5.5 mm [0.217 in.]			
HSMF-M3-030	3.0 [0.118]	6.0 [0.236]	2000
HSMF-M3-037	3.7 [0.146]	6.0 [0.236]	
HSMF-M3-040	4.0 [0.157]	6.0 [0.236]	
HSMF-M3-050	5.0 [0.197]	6.0 [0.236]	
HSMF-M3-060	6.0 [0.236]	6.0 [0.236]	
HSMF-M3-064	6.4 [0.250]	6.0 [0.236]	
HSMF-M3-080	8.0 [0.315]	6.0 [0.236]	
HSMF-M3-090	9.0 [0.354]	6.0 [0.236]	
HSMF-M3-095	9.5 [0.375]	6.0 [0.236]	

Part Number	Length "L", mm [in.]	Ref. "T", mm [in.]	Std. Pkg.
Thread Size = M3 x 0.5 mm O.D. = 5.5 mm [0.217 in.]			M3
HSMF-M3-100	10.0 [0.394]	6.0 [0.236]	1000
HSMF-M3-120	12.0 [0.472]	6.0 [0.236]	
HSMF-M3-127	12.7 [0.500]	6.0 [0.236]	
HSMF-M3-140	14.0 [0.551]	6.0 [0.236]	
HSMF-M3-150	15.0 [0.591]	6.0 [0.236]	
HSMF-M3-159	15.9 [0.625]	6.0 [0.236]	
HSMF-M3-160	16.0 [0.630]	6.0 [0.236]	
HSMF-M3-180	18.0 [0.709]	6.0 [0.236]	
HSMF-M3-191	19.1 [0.750]	6.0 [0.236]	
HSMF-M3-200	20.0 [0.787]	6.0 [0.236]	
HSMF-M3-220	22.0 [0.866]	6.0 [0.236]	
HSMF-M3-222	22.2 [0.875]	6.0 [0.236]	
HSMF-M3-240	24.0 [0.945]	6.0 [0.236]	
HSMF-M3-250	25.0 [0.984]	6.0 [0.236]	
HSMF-M3-254	25.4 [1.000]	6.0 [0.236]	
HSMF-M3-270	27.0 [1.063]	6.0 [0.236]	
HSMF-M3-300	30.0 [1.181]	6.0 [0.236]	
Thread Size = M4 x 0.7 mm O.D. = 7.0 mm [0.276 in.]			M4
HSMF-M4-040	4.0 [0.157]	6.0 [0.236]	1000
HSMF-M4-050	5.0 [0.197]	6.0 [0.236]	
HSMF-M4-060	6.0 [0.236]	6.0 [0.236]	
HSMF-M4-064	6.4 [0.250]	6.0 [0.236]	
HSMF-M4-080	8.0 [0.315]	6.0 [0.236]	
HSMF-M4-085	8.5 [0.335]	6.0 [0.236]	
HSMF-M4-095	9.5 [0.375]	6.0 [0.236]	
HSMF-M4-100	10.0 [0.394]	6.0 [0.236]	
HSMF-M4-120	12.0 [0.472]	6.0 [0.236]	
HSMF-M4-127	12.7 [0.500]	6.0 [0.236]	
HSMF-M4-140	14.0 [0.551]	6.0 [0.236]	
HSMF-M4-150	15.0 [0.591]	6.0 [0.236]	
HSMF-M4-159	15.9 [0.625]	6.0 [0.236]	
HSMF-M4-160	16.0 [0.630]	6.0 [0.236]	
HSMF-M4-180	18.0 [0.709]	6.0 [0.236]	


Part Number	Length "L", mm [in.]	Ref. "T", mm [in.]	Std. Pkg.
Thread Size = M4 x 0.7 mm O.D. = 7.0 mm [0.276 in.]			M4
HSMF-M4-191	19.1 [0.750]	6.0 [0.236]	1000
HSMF-M4-200	20.0 [0.787]	6.0 [0.236]	
HSMF-M4-222	22.2 [0.875]	6.0 [0.236]	
HSMF-M4-240	24.0 [0.945]	6.0 [0.236]	
HSMF-M4-250	25.0 [0.984]	6.0 [0.236]	
HSMF-M4-254	25.4 [1.000]	6.0 [0.236]	
HSMF-M4-300	30.0 [1.181]	6.0 [0.236]	
Thread Size = M5 x 0.8 mm O.D. = 8.0 mm [0.315 in.]			M5
HSMF-M5-050	5.0 [0.197]	7.0 [0.276]	1000
HSMF-M5-060	6.0 [0.236]	7.0 [0.276]	
HSMF-M5-064	6.4 [0.250]	7.0 [0.276]	
HSMF-M5-080	8.0 [0.315]	7.0 [0.276]	
HSMF-M5-095	9.5 [0.375]	7.0 [0.276]	
HSMF-M5-100	10.0 [0.394]	7.0 [0.276]	
HSMF-M5-120	12.0 [0.472]	7.0 [0.276]	
HSMF-M5-127	12.7 [0.500]	7.0 [0.276]	
HSMF-M5-140	14.0 [0.551]	7.0 [0.276]	
HSMF-M5-150	15.0 [0.591]	7.0 [0.276]	
HSMF-M5-159	15.9 [0.625]	7.0 [0.276]	
HSMF-M5-160	16.0 [0.630]	7.0 [0.276]	
HSMF-M5-180	18.0 [0.709]	7.0 [0.276]	
HSMF-M5-191	19.1 [0.750]	7.0 [0.276]	
HSMF-M5-200	20.0 [0.787]	7.0 [0.276]	
HSMF-M5-220	22.0 [0.866]	7.0 [0.276]	
HSMF-M5-222	22.2 [0.875]	7.0 [0.276]	
HSMF-M5-240	24.0 [0.945]	7.0 [0.276]	
HSMF-M5-250	25.0 [0.984]	7.0 [0.276]	
HSMF-M5-254	25.4 [1.000]	7.0 [0.276]	
HSMF-M5-300	30.0 [1.181]	7.0 [0.276]	

Custom Order Options:

Material: Nylon 66/Polycarbonate (PC)
UL Rating: 94V-2/94V-0
Color: Natural/Black
Length: Customized
Thread Sizes: M2, M2.5, M3, M4, M5
 Unthreaded
 (For Self-Tapping Screws)

Round Spacer


RS Series, Non-threaded



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1000 EA
Customized Length: Available

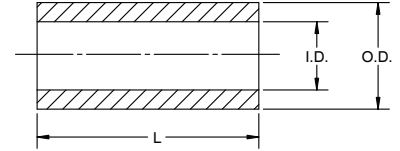

Part Number	Length "L", mm [in.]
ID = 2.2 mm [0.087 in.], OD = 3.8 mm [0.150 in.] to fit metric screw size (or standard equiv.): M2	
RS-20-38-020	2.0 [0.079]
RS-20-38-032	3.2 [0.125]
RS-20-38-040	4.0 [0.157]
RS-20-38-050	5.0 [0.197]
RS-20-38-060	6.0 [0.236]
RS-20-38-064	6.4 [0.250]
RS-20-38-080	8.0 [0.315]
RS-20-38-095	9.5 [0.375]
RS-20-38-100	10.0 [0.394]
RS-20-38-120	12.0 [0.472]
RS-20-38-127	12.7 [0.500]
RS-20-38-150	15.0 [0.591]
RS-20-38-160	16.0 [0.630]
ID = 2.7 mm [0.106 in.], OD = 6.5 mm [0.256 in.] to fit metric screw size (or standard equiv.): M2.5	
RS-25-65-032	3.2 [0.125]
RS-25-65-040	4.0 [0.157]
RS-25-65-050	5.0 [0.197]
RS-25-65-060	6.0 [0.236]
RS-25-65-064	6.4 [0.250]
RS-25-65-080	8.0 [0.315]
RS-25-65-095	9.5 [0.375]
RS-25-65-100	10.0 [0.394]
RS-25-65-120	12.0 [0.472]
RS-25-65-127	12.7 [0.500]
RS-25-65-159	15.9 [0.625]
RS-25-65-160	16.0 [0.630]
RS-25-65-180	18.0 [0.709]
RS-25-65-191	19.1 [0.750]
RS-25-65-200	20.0 [0.787]
RS-25-65-222	22.2 [0.875]
RS-25-65-250	25.0 [0.984]
RS-25-65-254	25.4 [1.000]
RS-25-65-300	30.0 [1.181]

Part Number	Length "L", mm [in.]
ID = 3.1 mm [0.122 in.], OD = 5.0 mm [0.197 in.] to fit metric screw size (or standard equiv.): M3	
RS-30-50-030	3.0 [0.118]
RS-30-50-032	3.2 [0.125]
RS-30-50-035	3.5 [0.138]
RS-30-50-040	4.0 [0.157]
RS-30-50-045	4.5 [0.177]
RS-30-50-050	5.0 [0.197]
RS-30-50-060	6.0 [0.236]
RS-30-50-064	6.4 [0.250]
RS-30-50-070	7.0 [0.276]
RS-30-50-075	7.5 [0.295]
RS-30-50-080	8.0 [0.315]
RS-30-50-090	9.0 [0.354]
RS-30-50-095	9.5 [0.375]
RS-30-50-100	10.0 [0.394]
RS-30-50-104	10.4 [0.409]
RS-30-50-120	12.0 [0.472]
RS-30-50-127	12.7 [0.500]
RS-30-50-140	14.0 [0.551]
RS-30-50-159	15.9 [0.625]
RS-30-50-160	16.0 [0.630]
RS-30-50-180	18.0 [0.709]
RS-30-50-191	19.1 [0.750]
RS-30-50-200	20.0 [0.787]
RS-30-50-222	22.2 [0.875]
RS-30-50-250	25.0 [0.984]
RS-30-50-254	25.4 [1.000]
RS-30-50-300	30.0 [1.181]

Part Number	Length "L", mm [in.]
ID = 3.2 mm [0.126 in.], OD = 7.0 mm [0.276 in.] to fit metric screw size (or standard equiv.): M3	
RS-30-70-020	2.0 [0.079]
RS-30-70-030	3.0 [0.118]
RS-30-70-032	3.2 [0.125]
RS-30-70-040	4.0 [0.157]
RS-30-70-050	5.0 [0.197]
RS-30-70-060	6.0 [0.236]
RS-30-70-064	6.4 [0.250]
RS-30-70-070	7.0 [0.276]
RS-30-70-080	8.0 [0.315]
RS-30-70-090	9.0 [0.354]
RS-30-70-095	9.5 [0.375]
RS-30-70-100	10.0 [0.394]
RS-30-70-120	12.0 [0.472]
RS-30-70-127	12.7 [0.500]
RS-30-70-140	14.0 [0.551]
RS-30-70-159	15.9 [0.625]
RS-30-70-160	16.0 [0.630]
RS-30-70-180	18.0 [0.709]
RS-30-70-191	19.1 [0.750]
RS-30-70-200	20.0 [0.787]
RS-30-70-222	22.2 [0.875]
RS-30-70-250	25.0 [0.984]
RS-30-70-254	25.4 [1.000]
RS-30-70-300	30.0 [1.181]

Custom Order Options:

Material: Nylon 66/Polycarbonate (PC)
UL Rating: 94V-2/94V-0
Color: Natural/Black
Length: Customized


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Round Spacer


RS Series, Non-threaded



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1000 EA
Customized Length: Available

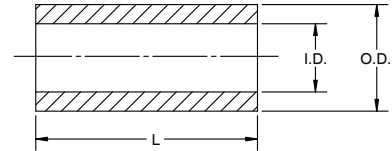

Part Number	Length "L", mm [in.]
ID = 3.1 mm [0.122 in.], OD = 8.0 mm [0.315 in.] to fit metric screw size (or standard equiv.): M3	
RS-30-80-020	2.0 [0.079]
RS-30-80-030	3.0 [0.118]
RS-30-80-032	3.2 [0.125]
RS-30-80-040	4.0 [0.157]
RS-30-80-050	5.0 [0.197]
RS-30-80-060	6.0 [0.236]
RS-30-80-064	6.4 [0.250]
RS-30-80-070	7.0 [0.276]
RS-30-80-080	8.0 [0.315]
RS-30-80-090	9.0 [0.354]
RS-30-80-095	9.5 [0.375]
RS-30-80-100	10.0 [0.394]
RS-30-80-120	12.0 [0.472]
RS-30-80-127	12.7 [0.500]
RS-30-80-140	14.0 [0.551]
RS-30-80-159	15.9 [0.625]
RS-30-80-160	16.0 [0.630]
RS-30-80-180	18.0 [0.709]
RS-30-80-191	19.1 [0.750]
RS-30-80-200	20.0 [0.787]
RS-30-80-222	22.2 [0.875]
RS-30-80-250	25.0 [0.984]
RS-30-80-254	25.4 [1.000]
RS-30-80-300	30.0 [1.181]

Part Number	Length "L", mm [in.]
ID = 3.2 mm [0.126 in.], OD = 9.0 mm [0.354 in.] to fit metric screw size (or standard equiv.): M3	
RS-30-90-020	2.0 [0.079]
RS-30-90-030	3.0 [0.118]
RS-30-90-032	3.2 [0.125]
RS-30-90-040	4.0 [0.157]
RS-30-90-050	5.0 [0.197]
RS-30-90-060	6.0 [0.236]
RS-30-90-064	6.4 [0.250]
RS-30-90-070	7.0 [0.276]
RS-30-90-080	8.0 [0.315]
RS-30-90-090	9.0 [0.354]
RS-30-90-095	9.5 [0.375]
RS-30-90-100	10.0 [0.394]
RS-30-90-120	12.0 [0.472]
RS-30-90-127	12.7 [0.500]
RS-30-90-140	14.0 [0.551]
RS-30-90-159	15.9 [0.625]
RS-30-90-160	16.0 [0.630]
RS-30-90-180	18.0 [0.709]
RS-30-90-191	19.1 [0.750]
RS-30-90-200	20.0 [0.787]
RS-30-90-222	22.2 [0.875]
RS-30-90-250	25.0 [0.984]
RS-30-90-254	25.4 [1.000]
RS-30-90-300	30.0 [1.181]


Part Number	Length "L", mm [in.]
ID = 3.6 mm [0.142 in.], OD = 7.0 mm [0.276 in.] to fit metric screw size (or standard equiv.): M3.5	
RS-35-70-020	2.0 [0.079]
RS-35-70-030	3.0 [0.118]
RS-35-70-032	3.2 [0.125]
RS-35-70-040	4.0 [0.157]
RS-35-70-050	5.0 [0.197]
RS-35-70-060	6.0 [0.236]
RS-35-70-064	6.4 [0.250]
RS-35-70-070	7.0 [0.276]
RS-35-70-075	7.5 [0.295]
RS-35-70-080	8.0 [0.315]
RS-35-70-090	9.0 [0.354]
RS-35-70-095	9.5 [0.375]
RS-35-70-100	10.0 [0.394]
RS-35-70-120	12.0 [0.472]
RS-35-70-127	12.7 [0.500]
RS-35-70-140	14.0 [0.551]
RS-35-70-159	15.9 [0.625]
RS-35-70-160	16.0 [0.630]
RS-35-70-180	18.0 [0.709]
RS-35-70-191	19.1 [0.750]
RS-35-70-200	20.0 [0.787]
RS-35-70-222	22.2 [0.875]
RS-35-70-250	25.0 [0.984]
RS-35-70-254	25.4 [1.000]
RS-35-70-300	30.0 [1.181]

Custom Order Options:

Material: Nylon 66/Polycarbonate (PC)
UL Rating: 94V-2/94V-0
Color: Natural/Black
Length: Customized

Round Spacer


RS Series, Non-threaded



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1000 EA
Customized Length: Available

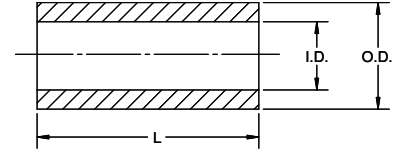

Part Number	Length "L", mm [in.]
ID = 4.2 mm [0.165 in.], OD = 6.4 mm [0.252 in.] to fit metric screw size (or standard equiv.): M4	
RS-40-64-020	2.0 [0.079]
RS-40-64-030	3.0 [0.118]
RS-40-64-032	3.2 [0.125]
RS-40-64-040	4.0 [0.157]
RS-40-64-050	5.0 [0.197]
RS-40-64-060	6.0 [0.236]
RS-40-64-064	6.4 [0.250]
RS-40-64-070	7.0 [0.276]
RS-40-64-080	8.0 [0.315]
RS-40-64-090	9.0 [0.354]
RS-40-64-095	9.5 [0.375]
RS-40-64-100	10.0 [0.394]
RS-40-64-120	12.0 [0.472]
RS-40-64-127	12.7 [0.500]
RS-40-64-140	14.0 [0.551]
RS-40-64-159	15.9 [0.625]
RS-40-64-160	16.0 [0.630]
RS-40-64-180	18.0 [0.709]
RS-40-64-191	19.1 [0.750]
RS-40-64-200	20.0 [0.787]
RS-40-64-222	22.2 [0.875]
RS-40-64-250	25.0 [0.984]
RS-40-64-254	25.4 [1.000]
RS-40-64-300	30.0 [1.181]

Part Number	Length "L", mm [in.]
ID = 4.2 mm [0.165 in.], OD = 8.0 mm [0.315 in.] to fit metric screw size (or standard equiv.): M4	
RS-40-80-020	2.0 [0.079]
RS-40-80-030	3.0 [0.118]
RS-40-80-032	3.2 [0.125]
RS-40-80-040	4.0 [0.157]
RS-40-80-050	5.0 [0.197]
RS-40-80-060	6.0 [0.236]
RS-40-80-064	6.4 [0.250]
RS-40-80-070	7.0 [0.276]
RS-40-80-080	8.0 [0.315]
RS-40-80-090	9.0 [0.354]
RS-40-80-095	9.5 [0.375]
RS-40-80-100	10.0 [0.394]
RS-40-80-120	12.0 [0.472]
RS-40-80-127	12.7 [0.500]
RS-40-80-140	14.0 [0.551]
RS-40-80-159	15.9 [0.625]
RS-40-80-160	16.0 [0.630]
RS-40-80-180	18.0 [0.709]
RS-40-80-191	19.1 [0.750]
RS-40-80-200	20.0 [0.787]
RS-40-80-222	22.2 [0.875]
RS-40-80-250	25.0 [0.984]
RS-40-80-254	25.4 [1.000]
RS-40-80-300	30.0 [1.181]

Part Number	Length "L", mm [in.]
ID = 4.3 mm [0.169 in.], OD = 9.0 mm [0.354 in.] to fit metric screw size (or standard equiv.): M4	
RS-40-90-020	2.0 [0.079]
RS-40-90-030	3.0 [0.118]
RS-40-90-032	3.2 [0.125]
RS-40-90-040	4.0 [0.157]
RS-40-90-050	5.0 [0.197]
RS-40-90-060	6.0 [0.236]
RS-40-90-064	6.4 [0.250]
RS-40-90-070	7.0 [0.276]
RS-40-90-080	8.0 [0.315]
RS-40-90-090	9.0 [0.354]
RS-40-90-095	9.5 [0.375]
RS-40-90-100	10.0 [0.394]
RS-40-90-120	12.0 [0.472]
RS-40-90-127	12.7 [0.500]
RS-40-90-140	14.0 [0.551]
RS-40-90-159	15.9 [0.625]
RS-40-90-160	16.0 [0.630]
RS-40-90-180	18.0 [0.709]
RS-40-90-191	19.1 [0.750]
RS-40-90-200	20.0 [0.787]
RS-40-90-222	22.2 [0.875]
RS-40-90-250	25.0 [0.984]
RS-40-90-254	25.4 [1.000]
RS-40-90-300	30.0 [1.181]

Custom Order Options:

Material: Nylon 66/Polycarbonate (PC)
UL Rating: 94V-2/94V-0
Color: Natural/Black
Length: Customized


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Round Spacer


RS Series, Non-threaded



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1000 EA
Customized Length: Available

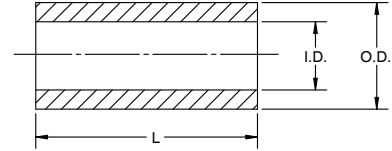

Part Number	Length "L", mm [in.]
ID = 5.3 mm [0.209 in.], OD = 7.0 mm [0.276 in.] to fit metric screw size (or standard equiv.): M5	
RS-50-70-020	2.0 [0.079]
RS-50-70-030	3.0 [0.118]
RS-50-70-032	3.2 [0.125]
RS-50-70-040	4.0 [0.157]
RS-50-70-050	5.0 [0.197]
RS-50-70-060	6.0 [0.236]
RS-50-70-064	6.4 [0.250]
RS-50-70-070	7.0 [0.276]
RS-50-70-080	8.0 [0.315]
RS-50-70-090	9.0 [0.354]
RS-50-70-095	9.5 [0.375]
RS-50-70-100	10.0 [0.394]
RS-50-70-120	12.0 [0.472]
RS-50-70-127	12.7 [0.500]
RS-50-70-140	14.0 [0.551]
RS-50-70-159	15.9 [0.625]
RS-50-70-160	16.0 [0.630]
RS-50-70-180	18.0 [0.709]
RS-50-70-191	19.1 [0.750]
RS-50-70-200	20.0 [0.787]
RS-50-70-222	22.2 [0.875]
RS-50-70-250	25.0 [0.984]
RS-50-70-254	25.4 [1.000]
RS-50-70-300	30.0 [1.181]

Part Number	Length "L", mm [in.]
ID = 5.3 mm [0.209 in.], OD = 10.0 mm [0.394 in.] to fit metric screw size (or standard equiv.): M5	
RS-50-100-020	2.0 [0.079]
RS-50-100-030	3.0 [0.118]
RS-50-100-032	3.2 [0.125]
RS-50-100-040	4.0 [0.157]
RS-50-100-050	5.0 [0.197]
RS-50-100-060	6.0 [0.236]
RS-50-100-064	6.4 [0.250]
RS-50-100-070	7.0 [0.276]
RS-50-100-080	8.0 [0.315]
RS-50-100-090	9.0 [0.354]
RS-50-100-095	9.5 [0.375]
RS-50-100-100	10.0 [0.394]
RS-50-100-120	12.0 [0.472]
RS-50-100-127	12.7 [0.500]
RS-50-100-140	14.0 [0.551]
RS-50-100-159	15.9 [0.625]
RS-50-100-160	16.0 [0.630]
RS-50-100-180	18.0 [0.709]
RS-50-100-191	19.1 [0.750]
RS-50-100-200	20.0 [0.787]
RS-50-100-222	22.2 [0.875]
RS-50-100-250	25.0 [0.984]
RS-50-100-254	25.4 [1.000]
RS-50-100-300	30.0 [1.181]

Custom Order Options:

Material: Nylon 66/Polycarbonate (PC)
UL Rating: 94V-2/94V-0
Color: Natural/Black
Length: Customized

Nylon PCB Support

PCBS-A Series, Snap-Lock, Rest Mount




Fig. 1





Fig. 2



RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1000 EA


Part Number	Figure	Ref. "H", mm [in.]	Base Dia., ø, mm [in.]
Mounting Hole Dia. = ø3.0 mm [ø0.118 in.]			
To Fit Panel Thickness = 1.2 - 1.7 mm [0.047 - 0.067 in.]			
PCBS-A-020	1	2.0 [0.079]	ø6.5 [0.256]
PCBS-A-025	1	2.5 [0.098]	ø6.5 [0.256]
PCBS-A-030	1	3.0 [0.118]	ø6.8 [0.268]
PCBS-A-035	1	3.5 [0.138]	ø6.8 [0.268]
PCBS-A-040	1	4.0 [0.157]	ø6.8 [0.268]
PCBS-A-050	2	5.0 [0.197]	ø6.0 [0.236]
PCBS-A-060	2	6.0 [0.236]	ø6.8 [0.268]
PCBS-A-065	2	6.5 [0.256]	ø6.0 [0.236]
PCBS-A-070	2	7.0 [0.276]	ø6.0 [0.236]
PCBS-A-080	2	8.0 [0.315]	ø6.8 [0.268]
PCBS-A-100	2	10.0 [0.394]	ø6.8 [0.268]
PCBS-A-150	2	15.0 [0.591]	ø6.0 [0.236]

Nylon PCB Support

PCBS-PCE Series, Snap-Lock, Rest Mount



HOLE IN P.C.B



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Part Number	Height "A", mm [in.]	Hole Dia in PCB "B", ø, mm [in.]	Base Dia. "C", ø, mm [in.]	Ref. "D", mm [in.]	PCB Thickness "T", mm [in.]	Standard Package
PCBS-PCE-1A	1.5 [0.059]	ø2.0 [0.079]	ø4.8 [0.189]	2.0 [0.079]	1.6 [0.063]	2000
PCBS-PCE-2	2.0 [0.079]	ø2.0 [0.079]	ø4.2 [0.165]	2.3 [0.091]	1.6 [0.063]	
PCBS-PCE-2A	2.5 [0.098]	ø2.0 [0.079]	ø4.8 [0.189]	2.0 [0.079]	1.6 [0.063]	
PCBS-PCE-2C	2.0 [0.079]	ø2.0 [0.079]	ø4.8 [0.189]	2.0 [0.079]	2.0 [0.079]	
PCBS-PCE-2D	2.9 [0.114]	ø2.0 [0.079]	ø4.2 [0.165]	2.3 [0.091]	1.6 [0.063]	
PCBS-PCE-3	3.0 [0.118]	ø2.0 [0.079]	ø4.2 [0.165]	2.0 [0.079]	1.6 [0.063]	
PCBS-PCE-3A	2.6 [0.102]	ø2.0 [0.079]	ø4.1 [0.161]	2.0 [0.079]	1.6 [0.063]	
PCBS-PCE-4	4.0 [0.157]	ø1.5 [0.059]	ø3.0 [0.118]	2.0 [0.079]	1.6 [0.063]	
PCBS-PCE-4A	4.0 [0.157]	ø2.0 [0.079]	ø4.8 [0.189]	2.1 [0.083]	1.6 [0.063]	
PCBS-PCE-4F	4.7 [0.185]	ø2.0 [0.079]	ø4.8 [0.189]	2.0 [0.079]	1.6 [0.063]	
PCBS-PCE-5	5.0 [0.197]	ø2.0 [0.079]	ø4.8 [0.189]	2.0 [0.079]	1.6 [0.063]	
PCBS-PCE-6	6.0 [0.236]	ø2.0 [0.079]	ø4.8 [0.189]	2.1 [0.083]	1.6 [0.063]	
PCBS-PCE-6A	6.5 [0.256]	ø2.0 [0.079]	ø4.8 [0.189]	2.2 [0.087]	1.6 [0.063]	
PCBS-PCE-6C	6.5 [0.256]	ø2.0 [0.079]	ø4.8 [0.189]	2.0 [0.079]	1.6 [0.063]	
PCBS-PCE-8	8.0 [0.315]	ø2.0 [0.079]	ø4.8 [0.189]	3.0 [0.118]	1.6 [0.063]	
PCBS-PCE-9	9.0 [0.354]	ø2.0 [0.079]	ø5.0 [0.197]	2.0 [0.079]	1.6 [0.063]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Nylon PCB Support


PCBS-B Series, Snap-Lock, Dual Locking Ends



RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1,000 EA



Part Number	Ref. "H", mm [in.]
Mounting Hole 1 Dia. = $\varnothing 4.0$ mm [$\varnothing 0.157$ in.]	
To Fit Panel 1 Thickness = 1.2 - 1.7 mm [0.047 - 0.067 in.]	
Mounting Hole 2 Dia. = $\varnothing 4.8$ mm [$\varnothing 0.189$ in.]	
To Fit Panel 2 Thickness = 0.8 - 2.2 mm [0.031 - 0.087 in.]	
PCBS-B-050	5.0 [0.197]
PCBS-B-063	6.3 [0.248]
PCBS-B-080	8.0 [0.315]
PCBS-B-100	10.0 [0.394]
PCBS-B-127	12.7 [0.500]
PCBS-B-159	15.9 [0.625]
PCBS-B-200	20.0 [0.787]
PCBS-B-250	25.0 [0.984]

Nylon PCB Support


PCBS-LCA4 Series, Snap-Lock, Dual Locking Ends



RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

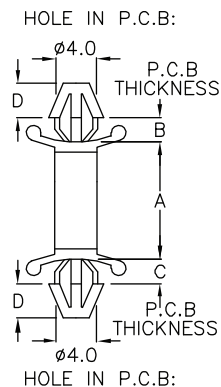

Part Number	Length "A", mm [in.]	PCB Thickness "B", mm [in.]	PCB Thickness "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in PCB = $\varnothing 4.0$ mm [$\varnothing 0.157$ in.]					
PCBS-LCA4-5	4.9 [0.193]	1.6-1.9 [0.063-0.075]	1.6-1.9 [0.063-0.075]	3.0 [0.118]	1000
PCBS-LCA4-8	7.1 [0.280]	1.2-1.8 [0.047-0.071]	1.2-1.8 [0.047-0.071]	3.6 [0.142]	
PCBS-LCA4-8A	7.6 [0.299]	2.5-3.0 [0.098-0.118]	2.5-3.0 [0.098-0.118]	2.6 [0.102]	
PCBS-LCA4-9	8.8 [0.346]	1.6-2.0 [0.063-0.079]	1.6-2.0 [0.063-0.079]	3.0 [0.118]	
PCBS-LCA4-10	10.0 [0.394]	1.2-2.0 [0.047-0.079]	1.2-2.0 [0.047-0.079]	3.6 [0.142]	
PCBS-LCA4-10A	10.4 [0.409]	1.1-1.8 [0.043-0.071]	1.6-3.1 [0.063-0.122]	3.6 [0.142]	
PCBS-LCA4-12	13.1 [0.516]	1.1-2.0 [0.043-0.079]	1.1-2.0 [0.043-0.079]	3.6 [0.142]	
PCBS-LCA4-15	15.9 [0.626]	1.1-2.0 [0.043-0.079]	1.1-2.0 [0.043-0.079]	3.6 [0.142]	
PCBS-LCA4-16	16.2 [0.638]	1.3-2.2 [0.051-0.087]	1.3-2.2 [0.051-0.087]	3.6 [0.142]	
PCBS-LCA4-17	17.2 [0.677]	1.1-2.0 [0.043-0.079]	1.1-2.0 [0.043-0.079]	3.6 [0.142]	
PCBS-LCA4-20A	19.6 [0.772]	1.1-2.0 [0.043-0.079]	1.7-3.5 [0.067-0.138]	3.6 [0.142]	500
PCBS-LCA4-29M	29.5 [1.161]	1.0-1.7 [0.039-0.067]	1.0-1.7 [0.039-0.067]	3.6 [0.142]	
PCBS-LCA4-31	30.8 [1.213]	1.0-1.7 [0.039-0.067]	1.0-1.7 [0.039-0.067]	3.6 [0.142]	
PCBS-LCA4-34A	34.0 [1.339]	1.1-1.9 [0.043-0.075]	1.6-3.1 [0.063-0.122]	3.6 [0.142]	
PCBS-LCA4-34C	34.0 [1.339]	0.8-2.0 [0.031-0.079]	1.7-3.5 [0.067-0.138]	3.6 [0.142]	
PCBS-LCA4-36	36.0 [1.417]	2.0-3.0 [0.079-0.118]	2.0-3.0 [0.079-0.118]	3.6 [0.142]	
PCBS-LCA4-36A	35.3 [1.390]	2.5-3.8 [0.098-0.150]	2.5-3.8 [0.098-0.150]	3.6 [0.142]	
PCBS-LCA4-44	43.6 [1.717]	0.8-1.9 [0.031-0.075]	0.8-1.9 [0.031-0.075]	3.6 [0.142]	
PCBS-LCA4-55	55.0 [2.165]	0.8-1.8 [0.031-0.071]	0.8-1.8 [0.031-0.071]	3.6 [0.142]	
PCBS-LCA4-56	56.4 [2.220]	1.0-1.6 [0.039-0.063]	1.0-1.6 [0.039-0.063]	3.6 [0.142]	200

Nylon PCB Support



PCBS-C Series, Snap-Lock, Dual Locking Ends



RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1,000 EA



Part Number	Ref. "H", mm [in.]
For Both Locking End: Mounting Hole Dia. = $\phi 3.0$ mm [$\phi 0.118$ in.] To Fit Panel Thickness = 1.2 - 2.0 mm [0.047 - 0.079 in.]	
PCBS-C-032	3.2 [0.125]
PCBS-C-050	5.0 [0.197]
PCBS-C-064	6.4 [0.250]
PCBS-C-070	7.0 [0.276]
PCBS-C-080	8.0 [0.315]
PCBS-C-095	9.5 [0.375]
PCBS-C-112	11.2 [0.441]
PCBS-C-120	12.0 [0.472]
PCBS-C-150	15.0 [0.591]
PCBS-C-170	17.0 [0.669]
PCBS-C-202	20.2 [0.795]
PCBS-C-254	25.4 [1.000]

Nylon PCB Support


PCBS-KCA Series, Snap-Lock, Dual Locking Ends



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

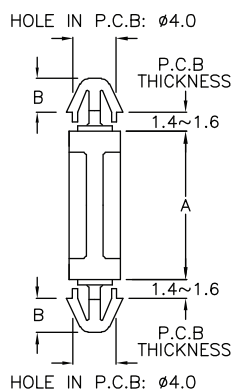

Part Number	Length "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
Mounting Hole Dia. (For both ends) = $\phi 4.0$ mm [$\phi 0.157$ in.] To Fit PCB Thickness (For both ends) = 1.4 - 1.6 mm [0.055 - 0.063 in.]			
PCBS-KCA-3	3.2 [0.126]	3.6 [0.142]	2000
PCBS-KCA-4	4.0 [0.157]	3.8 [0.150]	
PCBS-KCA-5	5.0 [0.197]	3.6 [0.142]	1000
PCBS-KCA-6	6.4 [0.250]	3.6 [0.142]	
PCBS-KCA-8	8.0 [0.315]	3.6 [0.142]	
PCBS-KCA-9	9.5 [0.374]	3.6 [0.142]	
PCBS-KCA-10	10.5 [0.413]	3.6 [0.142]	
PCBS-KCA-11	11.0 [0.433]	3.6 [0.142]	
PCBS-KCA-12	12.7 [0.500]	3.6 [0.142]	
PCBS-KCA-12S	12.7 [0.500]	3.2 [0.126]	
PCBS-KCA-14	14.0 [0.551]	3.0 [0.118]	500
PCBS-KCA-15	15.7 [0.618]	3.6 [0.142]	
PCBS-KCA-19	19.0 [0.748]	3.6 [0.142]	
PCBS-KCA-20	20.0 [0.787]	3.6 [0.142]	
PCBS-KCA-25	25.0 [0.984]	3.7 [0.146]	
PCBS-KCA-28A	28.5 [1.122]	3.6 [0.142]	
PCBS-KCA-30	30.0 [1.181]	3.7 [0.146]	200
PCBS-KCA-34	34.0 [1.339]	3.6 [0.142]	
PCBS-KCA-34A	34.0 [1.339]	3.6 [0.142]	
PCBS-KCA-40A	40.4 [1.591]	3.6 [0.142]	200
PCBS-KCA-69	69.0 [2.717]	3.7 [0.146]	
PCBS-KCA-80	80.0 [3.150]	3.0 [0.118]	200


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Nylon PCB Support


PCBS-D Series, Snap-Fit, Dual Locking Ends



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1,000 EA

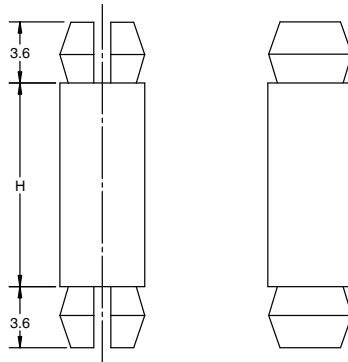

Part Number	Ref. "H", mm [in.]
For Both Locking End: Mounting Hole Dia. = $\phi 4.0$ mm [$\phi 0.157$ in.] To Fit Panel Thickness = 1.2 - 1.7 mm [0.047 - 0.067 in.]	
PCBS-D-050	5.0 [0.197]
PCBS-D-064	6.4 [0.250]
PCBS-D-080	8.0 [0.315]
PCBS-D-095	9.5 [0.375]
PCBS-D-105	10.5 [0.413]
PCBS-D-127	12.7 [0.500]
PCBS-D-140	14.0 [0.551]
PCBS-D-159	15.9 [0.625]
PCBS-D-190	19.0 [0.748]
PCBS-D-220	22.0 [0.866]

Nylon PCB Support

PCBS-LT Series, Snap-Lock, Edge Hold




Fig. 1





Fig. 2

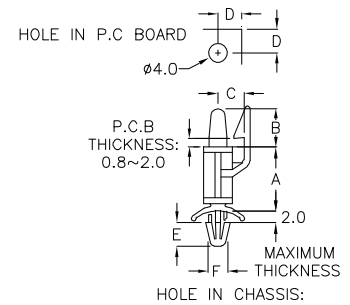

Please refer to drawing Fig.1 for the following table

Part Number	Length "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Std. Pkg.
Mount hole Dia. in PCB = $\phi 4.0$ mm [$\phi 0.157$ in.], PCB Thickness = 0.8 - 2.0 mm [0.031 - 0.079 in.] Mounting hole dia. in Chassis = $\phi 4.5$ mm [$\phi 0.177$ in.], Maximum Chassis Thickness = 2.0 mm [0.079 in.]					
PCBS-LT-08A	7.5 [0.295]	7.0 [0.276]	5.8 [0.228]	1.2-1.6 [0.047-0.063]	500
PCBS-LT-18A	18.6 [0.732]	7.4 [0.291]	5.4 [0.213]	1.0-1.4 [0.039-0.055]	

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Please refer to drawing Fig.2 for the following table

Part Number	Length "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Hole Dia. In Chassis "F", ϕ , mm [in.]	Std. Pkg.
Mount hole Dia. in PCB = $\phi 4.0$ mm [$\phi 0.157$ in.], PCB Thickness = 0.8 - 2.0 mm [0.031 - 0.079 in.] Mounting hole dia. in Chassis = See Ref. "F", Maximum Chassis Thickness = 2.0 mm [0.079 in.]							
PCBS-LT-10	9.2 [0.362]	7.4 [0.291]	5.5 [0.217]	5.0 [0.197]	5.2 [0.205]	$\phi 4.0$ [0.157]	500
PCBS-LT-12	11.9 [0.469]	7.4 [0.291]	5.5 [0.217]	5.0 [0.197]	4.5 [0.177]	$\phi 4.0$ [0.157]	
PCBS-LT-15	15.1 [0.594]	7.4 [0.291]	5.5 [0.217]	5.0 [0.197]	5.2 [0.205]	$\phi 4.0$ [0.157]	
PCBS-LT-18	17.2 [0.677]	7.4 [0.291]	5.5 [0.217]	5.0 [0.197]	5.2 [0.205]	$\phi 4.0$ [0.157]	
PCBS-LT-26	26.2 [1.031]	15.0 [0.591]	6.4 [0.252]	6.0 [0.236]	5.2 [0.205]	$\phi 5.0$ [0.197]	

Nylon PCB Support


PCBS-E Series, Snap-Lock, Reverse Dual Lock



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Package: 1,000 EA

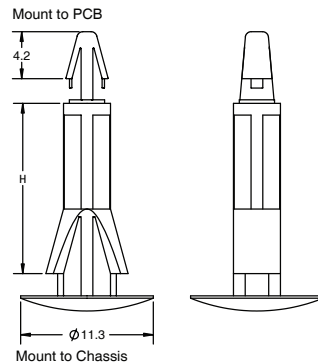

Part Number	Ref. "H", mm [in.]
Mounting Hole 1 (to PCB) Dia. = 4.0 mm [0.157 in.] To Fit PCB Thickness = 1.2 - 1.7 mm [0.047 - 0.067 in.] Mounting Hole 2 (to Chassis) Dia. = 5.5 mm [0.217 in.] To Fit Chassis Panel Thickness = 1.5 - 2.2 mm [0.059 - 0.087 in.]	
PCBS-E-030	3.0 [0.118]
PCBS-E-050	5.0 [0.197]
PCBS-E-064	6.4 [0.250]
PCBS-E-080	8.0 [0.315]
PCBS-E-100	10.0 [0.394]
PCBS-E-120	12.0 [0.472]
PCBS-E-159	15.9 [0.625]
PCBS-E-190	19.0 [0.748]
PCBS-E-254	25.4 [1.000]
PCBS-E-355	35.5 [1.398]

Nylon PCB Support


PCBS-SCB Series, Snap-Lock, Reverse Dual Lock

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

HOLE IN P.C.B: Ø4.0



Part Number	Length "A", mm [in.]	PCB Thickness "B", mm [in.]	Chassis Thickness "C", mm [in.]	Cap Dia. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = 5.5 mm [0.217 in.] Mounting Hole Dia. in PCB = 4.0 mm [0.157 in.]						
PCBS-SCB-5	5.0 [0.197]	1.2-1.6 [0.047-0.063]	0.8-1.4 [0.031-0.055]	10.0 [0.394]	7.4 [0.291]	1000
PCBS-SCB-5.5	5.5 [0.217]	1.2-1.6 [0.047-0.063]	0.8-1.7 [0.031-0.067]	10.0 [0.394]	7.1 [0.280]	
PCBS-SCB-6	6.4 [0.250]	1.2-1.6 [0.047-0.063]	0.8-1.2 [0.031-0.047]	10.0 [0.394]	7.5 [0.295]	
PCBS-SCB-6A	6.5 [0.256]	1.4-1.8 [0.055-0.071]	0.8-1.7 [0.031-0.067]	10.1 [0.398]	7.1 [0.280]	
PCBS-SCB-6F	6.5 [0.256]	1.2-1.6 [0.047-0.063]	1.0-2.0 [0.039-0.079]	10.0 [0.394]	4.9 [0.193]	
PCBS-SCB-8A	8.0 [0.315]	1.2-1.6 [0.047-0.063]	0.8-1.4 [0.031-0.055]	9.9 [0.390]	7.1 [0.280]	
PCBS-SCB-8A	8.0 [0.315]	1.2-1.6 [0.047-0.063]	0.8-1.1 [0.031-0.043]	10.1 [0.398]	7.4 [0.291]	
PCBS-SCB-9A	9.0 [0.354]	1.2-1.8 [0.047-0.071]	0.8-1.4 [0.031-0.055]	10.0 [0.394]	7.3 [0.287]	
PCBS-SCB-10	10.0 [0.394]	1.2-1.6 [0.047-0.063]	0.8-1.2 [0.031-0.047]	10.0 [0.394]	7.6 [0.299]	
PCBS-SCB-10A	10.0 [0.394]	1.5-2.4 [0.059-0.094]	1.0-1.4 [0.039-0.055]	10.0 [0.394]	7.1 [0.280]	
PCBS-SCB-12	12.4 [0.488]	1.2-1.6 [0.047-0.063]	0.8-1.4 [0.031-0.055]	9.9 [0.390]	7.2 [0.283]	500
PCBS-SCB-15	15.6 [0.614]	1.2-1.6 [0.047-0.063]	0.8-1.4 [0.031-0.055]	9.8 [0.386]	7.3 [0.287]	
PCBS-SCB-16	16.2 [0.638]	1.2-1.6 [0.047-0.063]	0.7-1.2 [0.028-0.047]	9.8 [0.386]	6.6 [0.260]	
PCBS-SCB-19	19.0 [0.748]	1.2-1.6 [0.047-0.063]	0.8-1.4 [0.031-0.055]	9.9 [0.390]	7.5 [0.295]	
PCBS-SCB-24	24.0 [0.945]	1.2-1.6 [0.047-0.063]	0.8-1.4 [0.031-0.055]	9.8 [0.386]	7.5 [0.295]	
PCBS-SCB-28A	28.3 [1.114]	1.4-1.8 [0.055-0.071]	0.8-1.0 [0.031-0.039]	10.0 [0.394]	6.4 [0.252]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Nylon PCB Support

PCBS-SCE/SCK Series, Snap-Lock, Reverse Dual Lock

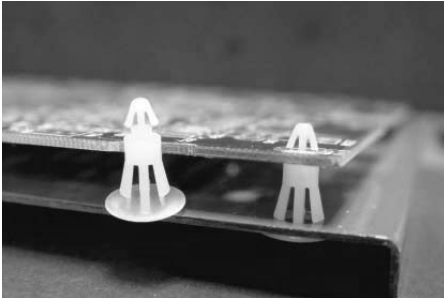


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Part Number	Length "A", mm [in.]	Chassis Thickness "C", mm [in.]	Cap Dia. "D", ø, mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = 4.0 mm [0.157 in.]				
Mounting Hole Dia. in PCB = 3.0 mm [0.118 in.], PCB Thickness = 1.2 - 1.7 mm [0.047 - 0.067 in.]				
PCBS-SCE-3A	3.5 [0.138]	1.1-1.7 [0.043-0.067]	ø11.5 [0.451]	1000
PCBS-SCE-6	6.4 [0.250]	1.1-1.6 [0.043-0.063]	ø11.5 [0.451]	
PCBS-SCE-8	8.0 [0.315]	1.1-1.6 [0.043-0.063]	ø11.5 [0.451]	
PCBS-SCE-10	9.7 [0.382]	1.1-1.6 [0.043-0.063]	ø11.5 [0.451]	
PCBS-SCE-10C	9.7 [0.382]	1.1-1.6 [0.043-0.063]	ø7.0 [0.276]	500
PCBS-SCE-10A	10.5 [0.413]	1.1-1.6 [0.043-0.063]	ø11.5 [0.451]	
PCBS-SCE-11	11.0 [0.433]	1.1-1.6 [0.043-0.063]	ø11.5 [0.451]	




Part Number	Length "A", mm [in.]	Chassis Thickness "C", mm [in.]	Cap Dia. "D", ø, mm [in.]	Ref. "E", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = 4.0 mm [0.157 in.]					
Mounting Hole Dia. in PCB = 3.0 mm [0.118 in.], PCB Thickness = 1.4 - 1.6 mm [0.055 - 0.063 in.]					
PCBS-SCK-2C	2.5 [0.098]	0.8-1.0 [0.031-0.039]	ø5.8 [0.228]	2.7 [0.106]	1000
PCBS-SCK-3A	3.2 [0.126]	0.8-1.6 [0.031-0.063]	ø8.2 [0.323]	3.1 [0.122]	
PCBS-SCK-04	4.0 [0.157]	0.8-1.6 [0.031-0.063]	ø8.2 [0.323]	3.1 [0.122]	
PCBS-SCK-06	6.0 [0.236]	0.8-1.6 [0.031-0.063]	ø8.2 [0.323]	3.1 [0.122]	
PCBS-SCK-08	8.0 [0.315]	0.8-1.6 [0.031-0.063]	ø8.2 [0.323]	3.1 [0.122]	
PCBS-SCK-10	10.0 [0.394]	0.8-1.6 [0.031-0.063]	ø8.2 [0.323]	3.1 [0.122]	
PCBS-SCK-12	12.0 [0.472]	0.8-1.6 [0.031-0.063]	ø8.2 [0.323]	3.1 [0.122]	



Nylon PCB Support

PCBS-FCB Series, Snap-Lock, Reverse Rest Mount



Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

RoHS COMPLIANT

Part Number	Length "A", mm [in.]	Chassis Thickness, "C", mm [in.]	Cap Dia. "D", ø, mm [in.]	Standard Package
Mounting Hole in Chassis = 5.5 mm [0.217 in.]				
PCBS-FCB-4M	4.5 [0.177]	0.8-1.2 [0.031-0.047]	ø9.8 [0.386]	1000
PCBS-FCB-5	5.0 [0.197]	1.4-2.0 [0.055-0.079]	ø11.5 [0.453]	
PCBS-FCB-6	6.4 [0.250]	1.0-2.0 [0.039-0.079]	ø10.4 [0.409]	
PCBS-FCB-6A	6.4 [0.250]	1.5-2.3 [0.059-0.091]	ø10.0 [0.394]	
PCBS-FCB-7	7.0 [0.276]	1.3-1.9 [0.051-0.075]	ø10.4 [0.409]	
PCBS-FCB-8	8.0 [0.315]	1.0-1.4 [0.039-0.055]	ø9.8 [0.386]	
PCBS-FCB-10	10.0 [0.394]	1.0-1.4 [0.039-0.055]	ø9.8 [0.386]	
PCBS-FCB-10A	10.0 [0.394]	1.4-2.0 [0.055-0.079]	ø11.5 [0.453]	
PCBS-FCB-12	12.7 [0.500]	1.0-1.4 [0.039-0.055]	ø9.8 [0.386]	
PCBS-FCB-12A	12.7 [0.500]	1.2-2.2 [0.047-0.087]	ø9.9 [0.390]	
PCBS-FCB-14	13.9 [0.547]	1.5-2.0 [0.059-0.079]	ø9.9 [0.390]	500
PCBS-FCB-15	15.7 [0.618]	1.6-2.2 [0.063-0.087]	ø9.8 [0.386]	

Nylon PCB Support


Edge Hold Spacer, Various Styles

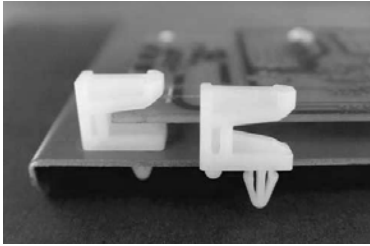


RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural



HOLE IN CHASSIS:





Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	PCB Thickness "C", mm [in.]	Spacing Height "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCBS-UB-5A	15.0 [0.591]	12.8 [0.504]	1.8 [0.071]	5.5 [0.217]	8.0 [0.315]	500

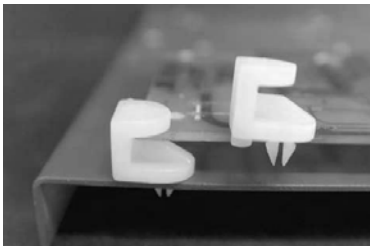

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural



HOLE IN CHASSIS:


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	PCB Thickness "C", mm [in.]	Spacing Height "D", mm [in.]	Standard Package
PCBS-UB-6	12.6 [0.496]	15.5 [0.610]	1.9 [0.075]	6.0 [0.236]	500

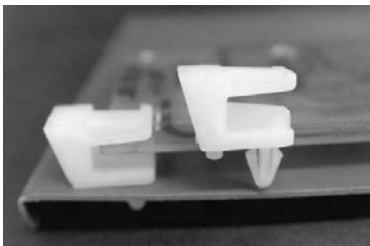


RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural



HOLE IN CHASSIS:





Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	PCB Thickness "C", mm [in.]	Spacing Height "D", mm [in.]	Ref. "E", mm [in.]	Pkg.
PCBS-UB-6BT	17.4 [0.685]	11.8 [0.465]	1.3 [0.051]	6.5 [0.256]	8.5 [0.335]	500
PCBS-UB-6CT	17.5 [0.689]	12.1 [0.476]	1.3 [0.051]	6.5 [0.256]	8.0 [0.315]	

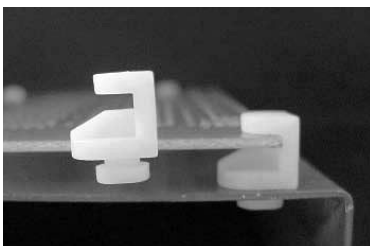

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural



HOLE IN CHASSIS

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	PCB Thickness "C", mm [in.]	Spacing Height "D", mm [in.]	Pkg
PCBS-UB-6A	12.5 [0.492]	14.6 [0.575]	1.9 [0.075]	5.9 [0.232]	500
PCBS-UB-6D	12.3 [0.484]	15.3 [0.602]	2.3 [0.091]	6.4 [0.252]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Nylon PCB Support



Edge Hold Spacer, Various Styles

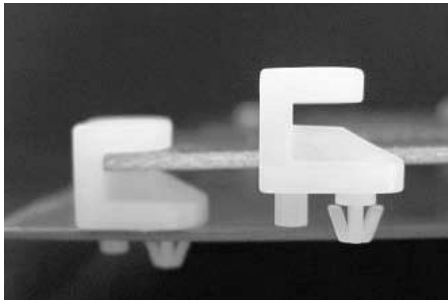


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

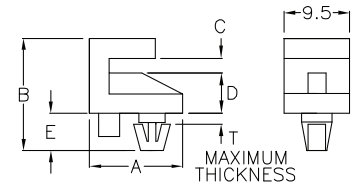


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	PCB Thickness "C", mm [in.]	Spacing Height "D", mm [in.]	Ref. "E", mm [in.]	Max. Chassis Thickness "T", mm [in.]	Standard Package
PCBS-UB-6C	13.4 [0.528]	15.6 [0.614]	2.1 [0.083]	6.0 [0.236]	4.9 [0.193]	1.3 [0.051]	500
PCBS-UB-6E	13.5 [0.531]	15.8 [0.622]	2.2 [0.087]	6.4 [0.252]	4.9 [0.193]	1.3 [0.051]	
PCBS-UB-6K	13.4 [0.528]	16.5 [0.650]	2.1 [0.083]	6.0 [0.236]	5.8 [0.228]	2.1 [0.083]	

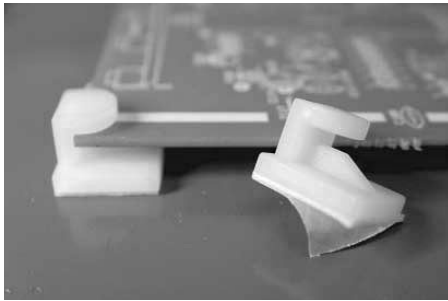


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ 4032

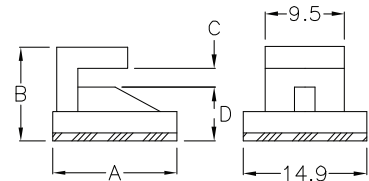



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	PCB Thickness "C", mm [in.]	Spacing Height "D", mm [in.]	Standard Package
PCBS-UB-6F	15.0 [0.591]	11.0 [0.433]	2.2 [0.087]	6.4 [0.252]	500
PCBS-UB-11F	15.0 [0.591]	15.8 [0.622]	2.5 [0.098]	10.8 [0.425]	
PCBS-UB-12F	15.0 [0.591]	16.9 [0.665]	2.3 [0.091]	12.0 [0.472]	

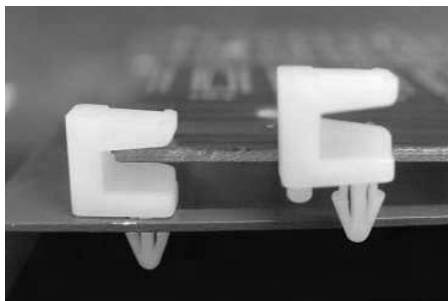

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

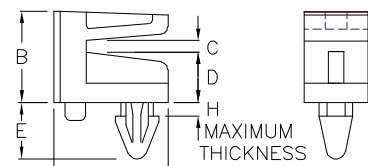

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	PCB Thickness "C", mm [in.]	Spacing Height "D", mm [in.]	Mounting Hole Dia. "F", mm [in.]	Mounting Hole Spacing "G", mm [in.]	Max. Chassis Thickness "H", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCBS-UB-6H	21.5 [0.846]	11.8 [0.465]	1.3 [0.051]	6.6 [0.260]	4.4 [0.173]	8.0 [0.315]	1.6 [0.063]	8.0 [0.315]	500
PCBS-UB-6T	14.8 [0.583]	11.9 [0.469]	1.3 [0.051]	6.6 [0.260]	4.4 [0.173]	8.0 [0.315]	1.7 [0.067]	7.9 [0.311]	
PCBS-UB-6U	12.0 [0.472]	11.8 [0.465]	1.3 [0.051]	6.6 [0.260]	4.4 [0.173]	6.5 [0.256]	1.8 [0.071]	8.0 [0.315]	
PCBS-UB-8U	12.0 [0.472]	14.0 [0.551]	2.0 [0.079]	8.5 [0.335]	4.4 [0.173]	6.5 [0.256]	0.8 [0.031]	8.0 [0.315]	
PCBS-UB-14T	15.0 [0.591]	19.2 [0.756]	1.3 [0.051]	14.0 [0.551]	4.4 [0.173]	8.0 [0.315]	1.8 [0.071]	8.0 [0.315]	
PCBS-UB-18T	15.5 [0.610]	23.6 [0.929]	1.6 [0.063]	18.2 [0.717]	5.0 [0.197]	8.5 [0.335]	1.8 [0.071]	8.2 [0.323]	200

Nylon PCB Support

PCBS-LSD Series, Keyslot Mount Spacer



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural






Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Hole in PCB Dia. "C", ϕ , mm [in.]	Ref. "D", mm [in.]	Standard Package
Refer to Fig. 1 for drawing					
PCBS-LSD-4A	4.5 [0.177]	2.0 [0.079]	$\phi 4.5$ [0.177]	2.7 [0.106]	500
PCBS-LSD-6	6.0 [0.236]	1.6 [0.063]	$\phi 6.0$ [0.236]	2.0 [0.079]	
PCBS-LSD-9A	9.5 [0.374]	1.6 [0.063]	$\phi 4.5$ [0.177]	2.0 [0.079]	
PCBS-LSD-9C	8.6 [0.339]	1.6 [0.063]	$\phi 6.0$ [0.236]	2.0 [0.079]	
PCBS-LSD-13A	13.3 [0.524]	1.6 [0.063]	$\phi 6.0$ [0.236]	2.0 [0.079]	

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "D", mm [in.]	Standard Package
Refer to Fig.2 for drawing				
PCBS-LSD-8	3.3 [0.130]	2.0 [0.079]	2.7 [0.106]	500
PCBS-LSD-8C	3.2 [0.126]	2.0 [0.079]	5.1 [0.201]	

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Hole in PCB Dia. "C", ϕ , mm [in.]	Standard Package
Refer to Fig.3 for drawing				
PCBS-LSD-9B	8.6 [0.339]	4.0 [0.157]	$\phi 4.5$ [0.177]	500
PCBS-LSD-11A	11.1 [0.437]	2.0 [0.079]	$\phi 4.5$ [0.177]	
PCBS-LSD-12	12.1 [0.476]	1.6 [0.063]	$\phi 4.5$ [0.177]	
PCBS-LSD-12A	12.1 [0.476]	2.0 [0.079]	$\phi 4.5$ [0.177]	
PCBS-LSD-14	14.0 [0.551]	1.6 [0.063]	$\phi 4.5$ [0.177]	

Part Number	Standard Package
Refer to Fig. 4 for drawing and specifications	
PCBS-LSD-11	500

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Hole in PCB Dia. "C", ϕ , mm [in.]	Standard Package
Refer to Fig. 5 for drawing				
PCBS-LSD-11C	11.0 [0.433]	2.0 [0.079]	$\phi 4.5$ [0.177]	500

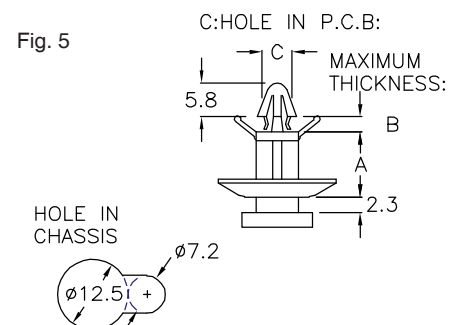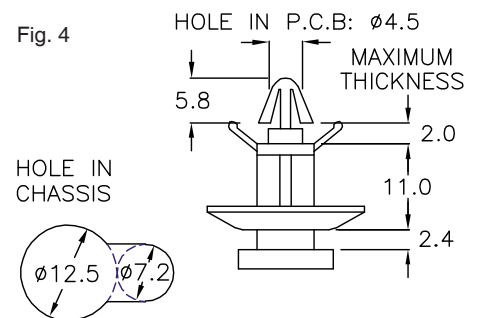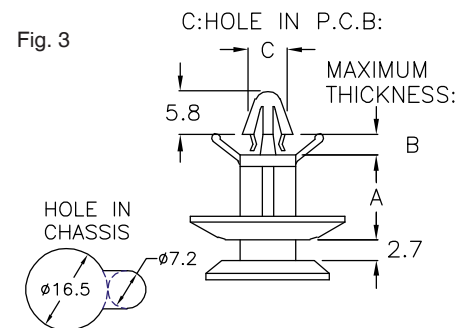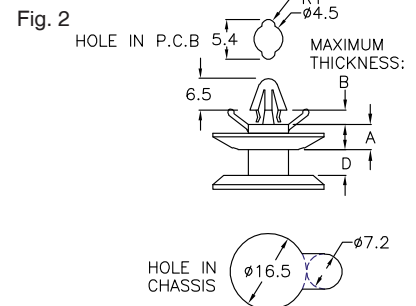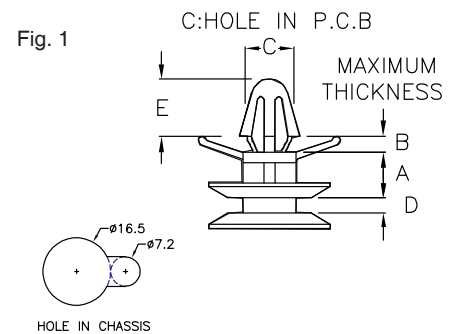


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Nylon PCB Support

PCBS-ACBS Series, Keyslot Mount Spacer



RoHS COMPLIANT

Specifications:






Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Part Number	Ref. "A", mm [in.]	Ref "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Refer to Fig. 1 for drawing				
PCBS-ACBS-2	2.5 [0.098]	1.4-1.7 [0.055-0.067]	0.8-1.4 [0.031-0.055]	1000
PCBS-ACBS-3A	3.5 [0.138]	1.4-1.7 [0.055-0.067]	0.8-1.0 [0.031-0.039]	
PCBS-ACBS-5	5.0 [0.197]	1.2-1.7 [0.047-0.067]	0.8-1.4 [0.031-0.055]	
PCBS-ACBS-6	6.5 [0.256]	1.2-1.7 [0.047-0.067]	0.8-1.2 [0.031-0.047]	
PCBS-ACBS-6B	6.4 [0.250]	1.4-1.9 [0.055-0.075]	0.8-1.4 [0.031-0.055]	
PCBS-ACBS-6C	6.4 [0.250]	1.4-2.0 [0.055-0.079]	0.8-1.4 [0.031-0.055]	
PCBS-ACBS-6M	6.4 [0.250]	1.2-1.6 [0.047-0.063]	0.5-0.8 [0.020-0.031]	
PCBS-ACBS-8	8.0 [0.315]	1.4-1.8 [0.055-0.071]	0.8-1.4 [0.031-0.055]	
PCBS-ACBS-10	10.0 [0.394]	1.4-1.8 [0.055-0.071]	0.8-1.5 [0.031-0.059]	
PCBS-ACBS-12	12.7 [0.500]	1.4-1.8 [0.055-0.071]	1.0-1.6 [0.039-0.063]	

Part Number	Ref. "A", mm [in.]	Ref "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Refer to Fig. 2 for drawing				
PCBS-ACBS-3C	3.5 [0.138]	1.4-1.8 [0.055-0.071]	0.8-1.0 [0.031-0.039]	1000
Refer to Fig. 3 for drawing				
PCBS-ACBS-6K	6.5 [0.256]	1.8-2.3 [0.071-0.091]	0.6-0.8 [0.024-0.031]	1000


Part Number	Ref. "A", mm [in.]	Ref "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Refer to Fig. 4 for drawing				
PCBS-ACBS-6T	6.7 [0.264]	1.5-2.3 [0.059-0.091]	0.8-1.5 [0.031-0.059]	1000
PCBS-ACBS-17T	17.0 [0.669]	1.4-1.8 [0.055-0.071]	0.6-0.8 [0.024-0.031]	500
PCBS-ACBS-74T	74.0 [2.913]	1.4-1.6 [0.055-0.063]	1.0-1.2 [0.039-0.047]	200

Part Number	Ref. "A", mm [in.]	Ref "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Refer to Fig. 5 for drawing				
PCBS-ACBS-8A	8.0 [0.315]	1.4-1.9 [0.055-0.075]	1.6-2.2 [0.063-0.087]	1000

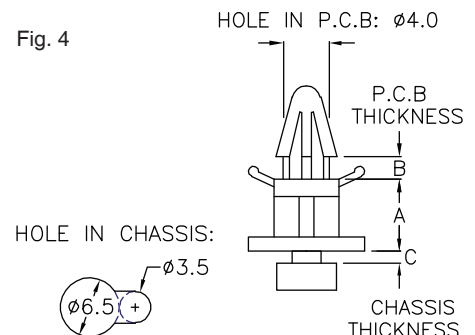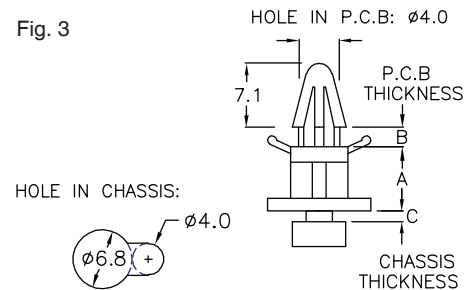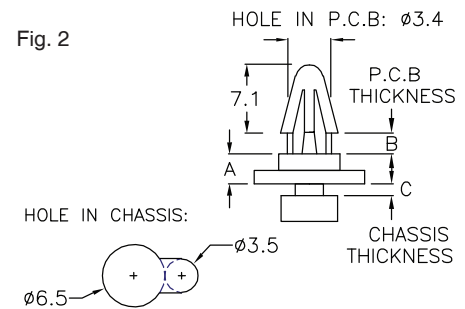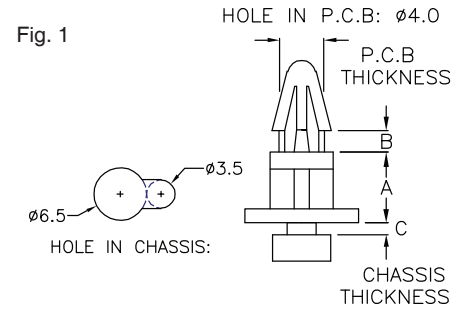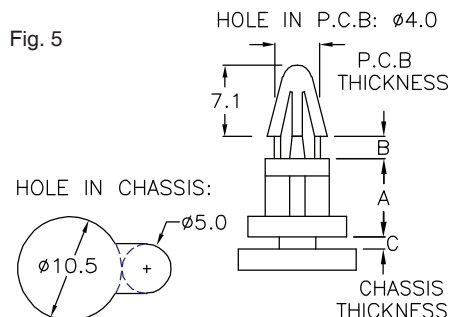

Nylon PCB Support

PCBS-ACBS Series, Slot/Rest Mount Spacer



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref "C", mm [in.]	Standard Package
Refer to Fig. 6 for drawing				
PCBS-ACBS-6Y	6.4 [0.252]	1.2-1.6 [0.047-0.063]	11.8 [0.465]	1000
PCBS-ACBS-8X	8.0 [0.315]	1.2-1.7 [0.047-0.067]	15.0 [0.591]	
PCBS-ACBS-8Y	8.0 [0.315]	1.2-1.7 [0.047-0.067]	11.6 [0.457]	
PCBS-ACBS-8K	8.0 [0.315]	1.2-1.7 [0.047-0.067]	18.0 [0.709]	
PCBS-ACBS-17	17.0 [0.669]	1.4-1.8 [0.055-0.071]	11.3 [0.445]	500

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
Refer to Fig. 7 for drawing			
PCBS-ACBS-8D	8.0 [0.315]	1.2-1.6 [0.047-0.063]	1000
PCBS-ACBS-9K	8.5 [0.335]	1.6-2.2 [0.063-0.087]	
PCBS-ACBS-9Y	9.0 [0.354]	1.2-1.6 [0.047-0.063]	
PCBS-ACBS-10Y	10.0 [0.394]	1.2-1.6 [0.047-0.063]	
PCBS-ACBS-11Y	11.0 [0.433]	1.2-1.6 [0.047-0.063]	

Fig. 6






Fig. 7



Nylon PCB Support

PCBS-LSA Series, Keyslot Mount Spacer




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Hole Dia. "C", ø, mm [in.]	Ref. "D", mm [in.]	Standard Package
PCBS-LSA-2A	3.0 [0.118]	1.6 [0.063]	ø4.0 [0.157]	1.4 [0.055]	500

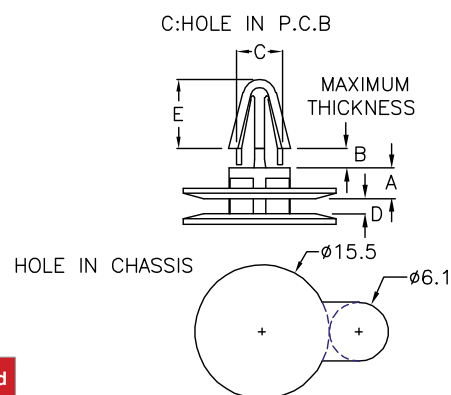


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Nylon PCB Support

PCBS-LTD Series, Slot/Rest Mount Spacer



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
Refer to Fig. 1 for Drawing			
PCBS-LTD-10	9.9 [0.390]	2.0 [0.079]	500
Refer to Fig. 2 for Drawing			
PCBS-LTD-11	9.9 [0.390]	2.0 [0.079]	500
PCBS-LTD-14	14.0 [0.551]	2.0 [0.079]	
Refer to Fig. 3 for Drawing			
PCBS-LTD-13	13.3 [0.524]	2.0 [0.079]	500

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Dia. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Refer to Fig. 4 for drawing					
PCBS-LTD-18	18.0 [0.709]	1.8 [0.071]	4.5 [0.177]	3.5 [0.138]	500
PCBS-LTD-18A	18.0 [0.709]	1.8 [0.071]	4.5 [0.177]	3.0 [0.118]	
Refer to Fig. 5 for drawing					
PCBS-LTD-18C	18.0 [0.709]	1.7 [0.067]	4.5 [0.177]	3.0 [0.118]	500

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Dia. "C", mm [in.]	Standard Package
Refer to Fig. 6 for drawing				
PCBS-LTD-21	21.0 [0.827]	2.0 [0.079]	4.5 [0.177]	200

Fig. 1




Fig. 2

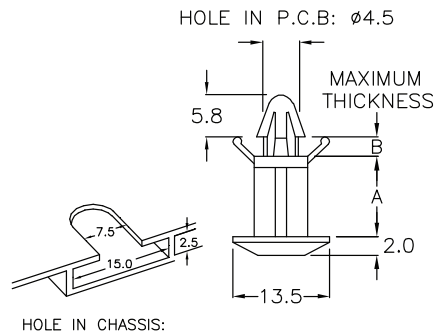


Fig. 3




Fig. 4




Fig. 5






Fig. 6



all dimension units in millimeter (mm) unless noted otherwise

Nylon PCB Support


PCBS-SRS Series, Screw Retainer Spacer



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural



Part Number	Height "H" mm [in.]	Ref. "C" mm [in.]	Std. Pkg.
O.D. = 4.0 mm [0.157 in.] I.D. = 2.1 mm [0.083 in.] To Fit Hole Dia. on PCB = 3.0 mm [0.118 in.] To Fit PCB Thickness = 0.8-1.0 mm [0.031-0.039 in.] To Fit Screw Size M2 or Std. Equiv.			
SRS-SS1-020	2.0 [0.079]	1.2 [0.047]	2000
SRS-SS1-025	2.5 [0.098]	1.2 [0.047]	
SRS-SS1-030	3.0 [0.118]	1.2 [0.047]	
SRS-SS1-035	3.5 [0.138]	1.2 [0.047]	
SRS-SS1-040	4.0 [0.157]	1.2 [0.047]	
SRS-SS1-045	4.5 [0.177]	1.2 [0.047]	
SRS-SS1-050	5.0 [0.197]	1.2 [0.047]	
SRS-SS1-055	5.5 [0.217]	1.2 [0.047]	
SRS-SS1-060	6.0 [0.236]	1.2 [0.047]	
SRS-SS1-020S	2.0 [0.079]	0.5 [0.020]	2000
SRS-SS1-025S	2.5 [0.098]	0.5 [0.020]	
SRS-SS1-030S	3.0 [0.118]	0.5 [0.020]	
SRS-SS1-035S	3.5 [0.138]	0.5 [0.020]	
SRS-SS1-040S	4.0 [0.157]	0.5 [0.020]	
SRS-SS1-045S	4.5 [0.177]	0.5 [0.020]	
SRS-SS1-050S	5.0 [0.197]	0.5 [0.020]	
SRS-SS1-055S	5.5 [0.217]	0.5 [0.020]	
SRS-SS1-060S	6.0 [0.236]	0.5 [0.020]	
O.D. = 4.0 mm [0.157 in.] I.D. = 2.1 mm [0.083 in.] To Fit Hole Dia. on PCB = 3.0 mm [0.118 in.] To Fit PCB Thickness = 1.6 mm [0.063 in.] To Fit Screw Size M2.0 or Std. Equiv.			
SRS-SS1-020L	2.0 [0.079]	1.0 [0.039]	2000
SRS-SS1-025L	2.5 [0.098]	1.0 [0.039]	
SRS-SS1-030L	3.0 [0.118]	1.0 [0.039]	
SRS-SS1-035L	3.5 [0.138]	1.0 [0.039]	
SRS-SS1-040L	4.0 [0.157]	1.0 [0.039]	
SRS-SS1-045L	4.5 [0.177]	1.0 [0.039]	
SRS-SS1-050L	5.0 [0.197]	1.0 [0.039]	
SRS-SS1-055L	5.5 [0.217]	1.0 [0.039]	
SRS-SS1-060L	6.0 [0.236]	1.0 [0.039]	
SRS-SS1-080L	8.0 [0.315]	1.0 [0.039]	

Part Number	Height "H" mm [in.]	Ref. "C" mm [in.]	Std. Pkg.
O.D. = 5.5 mm [0.217 in.] I.D. = 2.7 mm [0.106 in.] To Fit Hole Dia. on PCB = 4.0 mm [0.157 in.] To Fit PCB Thickness = 1.6 mm [0.063 in.] To Fit Screw Size M2.5 or Std. Equiv.			
SRS-SS2-025	2.5 [0.098]	1.5 [0.059]	2000
SRS-SS2-030	3.0 [0.118]	1.5 [0.059]	
SRS-SS2-040	4.0 [0.157]	1.5 [0.059]	
SRS-SS2-050	5.0 [0.197]	1.5 [0.059]	
SRS-SS2-054	5.4 [0.213]	1.5 [0.059]	
SRS-SS2-060	6.0 [0.236]	1.5 [0.059]	
O.D. = 5.5 mm [0.217 in.] I.D. = 2.8 mm [0.110 in.] To Fit Hole Dia. on PCB = 4.0 mm [0.157 in.] To Fit PCB Thickness = 1.6-1.8 mm [0.063-0.071 in.] To Fit Screw Size M2.6 or Std. Equiv.			
SRS-SS2-025S	2.5 [0.098]	1.5 [0.059]	2000
SRS-SS2-030S	3.0 [0.118]	1.5 [0.059]	
SRS-SS2-040S	4.0 [0.157]	1.5 [0.059]	
SRS-SS2-050S	5.0 [0.197]	1.5 [0.059]	
SRS-SS2-060S	6.0 [0.236]	1.5 [0.059]	
O.D. = 6.4 mm [0.250 in.] I.D. = 3.2 mm [0.126 in.] To Fit Hole Dia. on PCB = 4.8 mm [0.189 in.] To Fit PCB Thickness = 1.2-1.7 mm [0.047-0.067 in.] To Fit Screw Size M3 or Std. Equiv.			
SRS-SS3-030	3.0 [0.118]	1.5 [0.059]	1000
SRS-SS3-035	3.5 [0.138]	1.5 [0.059]	
SRS-SS3-040	4.0 [0.157]	1.5 [0.059]	
SRS-SS3-045	4.5 [0.177]	1.5 [0.059]	
SRS-SS3-050	5.0 [0.197]	1.5 [0.059]	
SRS-SS3-060	6.0 [0.236]	1.5 [0.059]	
SRS-SS3-080	8.0 [0.315]	1.5 [0.059]	
SRS-SS3-095	9.5 [0.375]	1.5 [0.059]	
SRS-SS3-111	11.1 [0.437]	1.5 [0.059]	
SRS-SS3-120	12.0 [0.472]	1.5 [0.059]	
SRS-SS3-127	12.7 [0.500]	1.5 [0.059]	
SRS-SS3-142	14.2 [0.559]	1.5 [0.059]	
SRS-SS3-150	15.0 [0.591]	1.5 [0.059]	

Part Number	Height "H" mm [in.]	Ref. "C" mm [in.]	Std. Pkg.
(Continued) O.D. = 6.4 mm [0.250 in.] I.D. = 3.2 mm [0.126 in.] To Fit Hole Dia. on PCB = 4.8 mm [0.189 in.] To Fit PCB Thickness = 1.2-1.7 mm [0.047-0.067 in.] To Fit Screw Size M3 or Std. Equiv.			
SRS-SS3-159	15.9 [0.625]	1.5 [0.059]	1000
SRS-SS3-191	19.1 [0.750]	1.5 [0.059]	
SRS-SS3-222	22.2 [0.875]	1.5 [0.059]	500
SRS-SS3-254	25.4 [1.000]	1.5 [0.059]	
SRS-SS3-[]	Custom	1.5 [0.059]	1000
O.D. = 7.1 mm [0.280 in.] I.D. = 4.2 mm [0.165 in.] To Fit Hole Dia. on PCB = 5.9 mm [0.232 in.] To Fit PCB Thickness = 1.2-1.7 mm [0.047-0.067 in.] To Fit Screw Size M4 or Std. Equiv.			
SRS-SS4-030	3.0 [0.118]	1.5 [0.059]	1000
SRS-SS4-040	4.0 [0.157]	1.5 [0.059]	
SRS-SS4-046	4.6 [0.181]	1.5 [0.059]	
SRS-SS4-050	5.0 [0.197]	1.5 [0.059]	
SRS-SS4-064	6.4 [0.250]	1.5 [0.059]	
SRS-SS4-079	7.9 [0.311]	1.5 [0.059]	
SRS-SS4-095	9.5 [0.375]	1.5 [0.059]	
SRS-SS4-111	11.1 [0.437]	1.5 [0.059]	
SRS-SS4-127	12.7 [0.500]	1.5 [0.059]	
SRS-SS4-159	15.9 [0.625]	1.5 [0.059]	
SRS-SS4-170	17.0 [0.669]	1.5 [0.059]	500
SRS-SS4-191	19.1 [0.750]	1.5 [0.059]	
SRS-SS4-222	22.2 [0.875]	1.5 [0.059]	
SRS-SS4-154	25.4 [1.000]	1.5 [0.059]	
SRS-SS4-300	30.0 [1.181]	1.5 [0.059]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Nylon PCB Support


PCBS-SRS Series, Stackable Screw Retainer Spacer



RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural



Part Number	"H" mm [in.]	"C" mm [in.]	Std. Pkg.
O.D. = 7.9 mm [0.311 in.] I.D. = 3.9 mm [0.154 in.] To Fit Hole Dia. on PCB = 5.9 mm [0.232 in.] To Fit PCB Thickness = 1.8 mm [0.071 in.] To Fit Screw Size M3.5 or Std. Equiv.			
SSRS-SS35-063	6.3 [0.248]	1.4 [0.053]	1000
SSRS-SS35-095	9.5 [0.375]	1.4 [0.053]	
SSRS-SS35-127	12.7 [0.500]	1.4 [0.053]	
SSRS-SS35-159	15.9 [0.625]	1.4 [0.053]	

Nylon PCB Support

PCBS-TAA Series, Snap Lock, Screw Secured

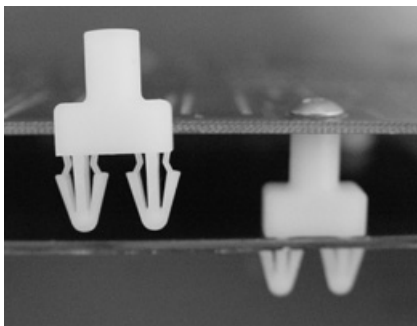

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Screw*: Self Tapping

*Screw Not Included

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Tapping Screw, Dia. x Length, mm [in.]	Standard Package
Refer to Fig. 1 for drawing Self Tapping Screw Dia. = 3 mm [0.118 in.]				
PCBS-TAA-01	13.8 [0.543]	2.0 [0.079]	3x8 [0.118x0.315]	500
PCBS-TAA-03	21.0 [0.827]	1.6 [0.063]	3x8 [0.118x0.315]	
PCBS-TAA-04	15.0 [0.591]	2.0 [0.079]	3x8 [0.118x0.315]	
PCBS-TAA-05	5.0 [0.197]	1.6 [0.063]	3x4 [0.118x0.157]	
PCBS-TAA-06	14.1 [0.555]	2.5 [0.098]	3x8 [0.118x0.315]	

Part Number	Ref. "A", mm[in.]	Ref. "B", mm[in.]	Ref. "E", mm[in.]	Tapping Screw, Dia. x Length, mm[in.]	Standard Package
Refer to Fig. 2 for drawing Self Tapping Screw Dia. = 3 mm [0.118 in.]					
PCBS-TAA-4A	8.5 [0.335]	1.6 [0.063]	4.8 [0.189]	3x6 [0.118x0.236]	500
PCBS-TAA-07	4.5 [0.177]	2.0 [0.079]	4.3 [0.169]	3x4 [0.118x0.157]	

Fig. 1



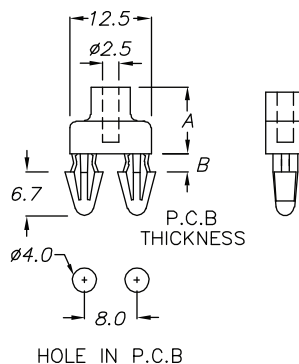


Fig. 2



Nylon PCB Support

PCBS-TCBS Series, Snap Lock, Self Tapping Chassis Mount

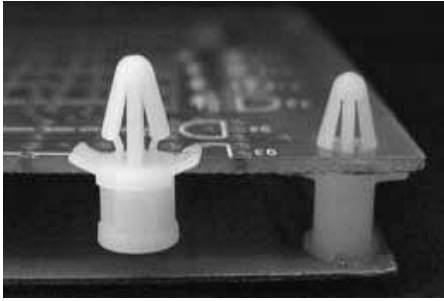


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Screw*: Self Tapping


*Screw Not Included

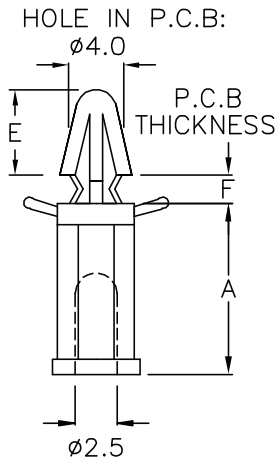

Part Number	Height "A", mm [in.]	Ref. "E", mm [in.]	PCB Thickness "F", mm [in.]	Tapping Screw	Standard Package
PCBS-TCBS-5	5.0 [0.197]	7.1 [0.280]	1.2-1.9 [0.047-0.075]	3 x 6mm	1000
PCBS-TCBS-5A	5.5 [0.217]	7.1 [0.280]			
PCBS-TCBS-6	6.4 [0.250]	6.8 [0.268]			
PCBS-TCBS-7	7.0 [0.276]	6.8 [0.268]			
PCBS-TCBS-10	10.0 [0.394]	7.1 [0.280]			
PCBS-TCBS-15	15.0 [0.591]	7.1 [0.280]			
PCBS-TCBS-18	18.0 [0.709]	6.8 [0.268]			
PCBS-TCBS-20	20.0 [0.787]	7.1 [0.280]			
PCBS-TCBS-25	25.0 [0.984]	7.1 [0.280]			
PCBS-TCBS-27A	27.4 [1.079]	6.8 [0.268]			
PCBS-TCBS-29	29.3 [1.154]	6.8 [0.268]	3 x 10mm		500
PCBS-TCBS-30	30.0 [1.181]	7.1 [0.280]			
PCBS-TCBS-35	35.0 [1.378]	7.1 [0.280]			
PCBS-TCBS-38	38.0 [1.496]	7.1 [0.280]			
PCBS-TCBS-40	40.0 [1.575]	7.1 [0.280]			200
PCBS-TCBS-49	49.0 [1.929]	6.6 [0.260]			

Nylon PCB Support


PCBS-SSBS Series, Snap Fit, Screw Chassis Mount

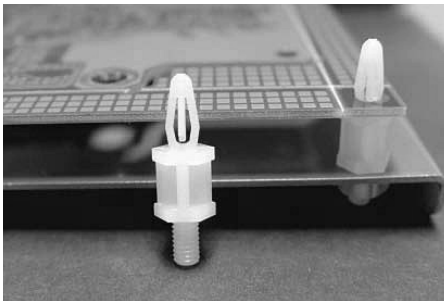

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

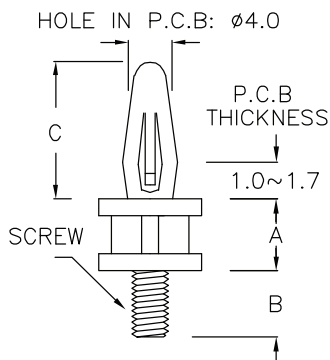


Part Number	Length "A", mm [in.]	Thread Length "B", mm [in.]	Ref. "C", mm [in.]	Thread Size	Standard Package
Mounting Hole Dia. in PCB = 4.0 mm [0.157 in.] PCB Thickness = 1.0 - 1.7 mm [0.039 - 0.067 in.]					
PCBS-SSBS-6	6.2 [0.244]	7.6 [0.299]	10.6 [0.417]	6-32	1000
PCBS-SSBS-6M	6.4 [0.250]	5.0 [0.197]	10.6 [0.417]	6-32	
PCBS-SSBS-10	9.6 [0.378]	7.5 [0.295]	10.6 [0.417]	6-32	
PCBS-SSBS-12A	12.5 [0.492]	5.0 [0.197]	10.1 [0.398]	6-32	
PCBS-SSBS-M4-6	6.3 [0.248]	5.0 [0.197]	10.6 [0.417]	M4	
PCBS-SSBS-M4-10	10.0 [0.394]	7.4 [0.291]	10.6 [0.417]	M4	
PCBS-SSBS-M4-16	15.8 [0.622]	7.4 [0.291]	10.6 [0.417]	M4	

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis


Nylon PCB Support
PCBS-MS Series, Snap Fit, Adhesive Chassis Mount

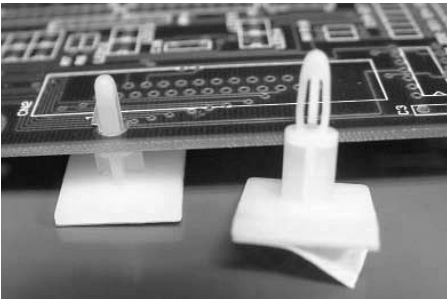

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

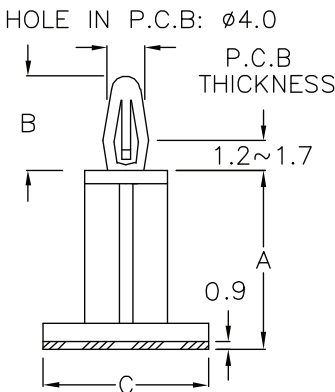

Part Number	Height "A", mm [in.]	Ref. "B", mm [in.]	Square Base Width "C", mm [in.]	Standard Package
Mounting Hole Dia. on PCB = 4.0 mm [0.157 in.] Adhesive Backing Thickness = 0.9 mm [0.035 in.]				
PCBS-MS-6	6.4 [0.250]	10.2 [0.402]	18.0 [0.709]	500
PCBS-MS-8	8.0 [0.315]	9.7 [0.382]		
PCBS-MS-10	9.6 [0.378]	10.2 [0.402]		
PCBS-MS-11A	11.6 [0.457]	4.9 [0.193]		
PCBS-MS-12	12.7 [0.500]	10.3 [0.406]		
PCBS-MS-16A	16.4 [0.646]	10.2 [0.402]	19.9 [0.783]	200
PCBS-MS-19	19.4 [0.764]	10.2 [0.402]	18.0 [0.709]	
PCBS-MS-22	22.2 [0.874]	9.6 [0.378]		

Nylon PCB Support
PCBS-LTX Series, Snap Lock, Rest/Tie Mount

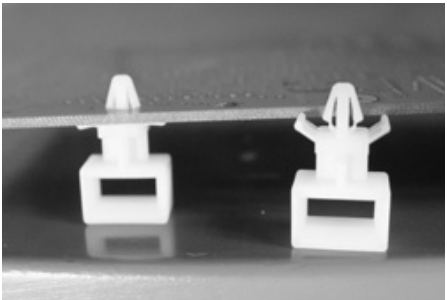

Part Number	Ref "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref "E", mm [in.]	Standard Package
Refer to Fig. 1 for drawing						
PCBS-LTX-13	13.2 [0.520]	7.2 [0.283]	3.7 [0.146]	1.6 [0.063]	-	1000
Refer to Fig. 2 for drawing						
PCBS-LTX-16	16.0 [0.630]	9.0 [0.354]	5.0 [0.197]	1.4 [0.055]	4.0 [0.157]	500
PCBS-LTX-16A	16.2 [0.638]	9.4 [0.370]	4.5 [0.177]	1.6 [0.063]	5.0 [0.197]	

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Fig. 1



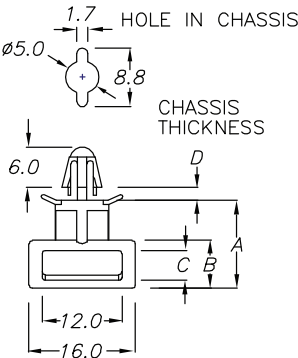


Fig. 2

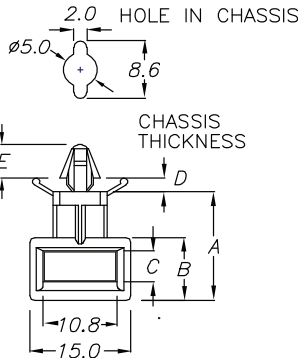

Printed Circuit Board Guide

Screw Mount

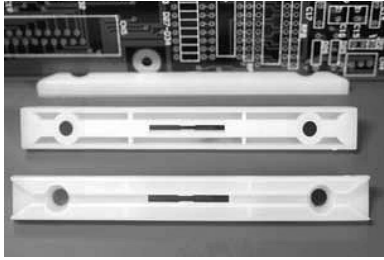


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Screw*: M3 x 6 mm Flat Head


*Screw Not Included

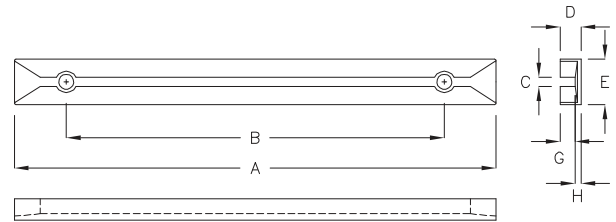

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "H", mm [in.]	Ref. "G", mm [in.]	Standard Package
Mounting Hole Dia. = 3 mm [0.118 in.] Use 2 Flat Head M3 x 6 mm or Equiv. Screws for Mounting								
CBG-CG-9	89.0 [3.504]	64.5 [2.539]	1.9 [0.075]	4.5 [0.177]	9.8 [0.386]	1.5 [0.059]	3.0 [0.118]	100
CBG-CG-9AS	100.0 [3.937]	77.4 [3.047]	2.2 [0.087]	7.2 [0.283]	10.0 [0.394]	1.7 [0.067]	5.5 [0.217]	
CBG-CG-9L	91.0 [3.583]	67.0 [2.638]	1.9 [0.075]	8.8 [0.346]	9.2 [0.362]	1.6 [0.063]	7.2 [0.283]	
CBG-CG-12	119.0 [4.685]	94.5 [3.720]	1.9 [0.075]	4.5 [0.177]	9.8 [0.386]	1.5 [0.059]	3.0 [0.118]	
CBG-CG-14	139.8 [5.504]	114.5 [4.508]	1.9 [0.075]	4.3 [0.169]	9.7 [0.382]	1.5 [0.059]	2.8 [0.110]	
CBG-CG-16	158.7 [6.248]	135.0 [5.315]	1.9 [0.075]	4.3 [0.169]	9.7 [0.382]	1.5 [0.059]	2.8 [0.110]	
CBG-CG-18	180.0 [7.087]	150.0 [5.906]	3.5 [0.138]	9.0 [0.354]	12.0 [0.472]	3.0 [0.118]	6.0 [0.236]	

Printed Circuit Board Guide

Horizontal, Screw Mount

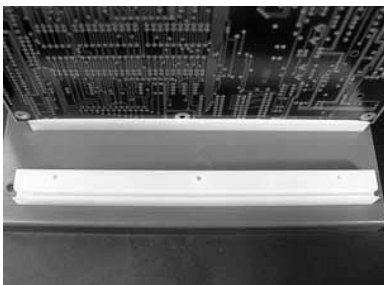


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Screw: M2.6 Flat Head

*Screw Not Included

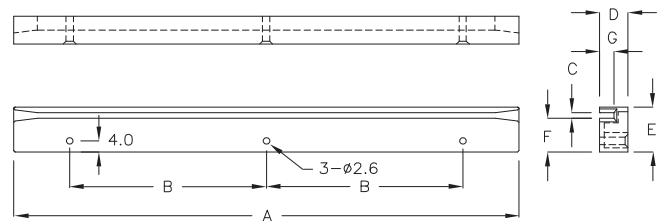

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Standard Package
Mounting Hole Dia. = 2.6 mm [0.102 in.] Use 3 Flat Head M2.6 or Equiv. Screws for Mounting								
CBG-CF-180	180.5 [7.106]	70.0 [2.756]	2.0 [0.079]	10.0 [0.394]	16.0 [0.630]	12.0 [0.472]	5.0 [0.197]	50

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Multi-Card Circuit Board Guides
Snap-In Mount, Fits 4 Circuit Boards




RoHS COMPLIANT

Specifications:




Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

See Drawing for Mounting Details

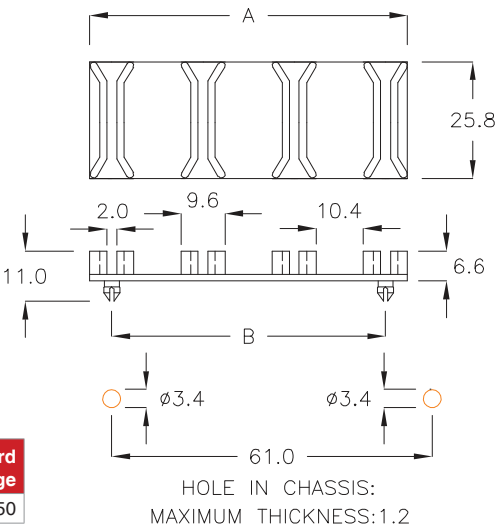

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
CBG-CG-2Ax4	70.5 [2.776]	61.0 [2.402]	50

Dual-Side Horizontal Circuit Board Guides
Snap-In Mount

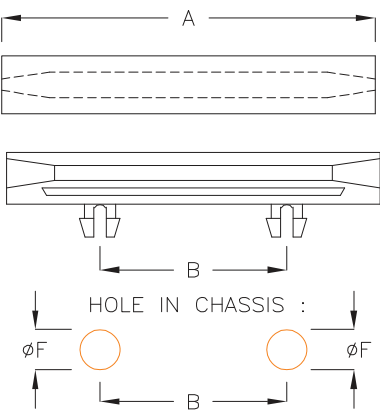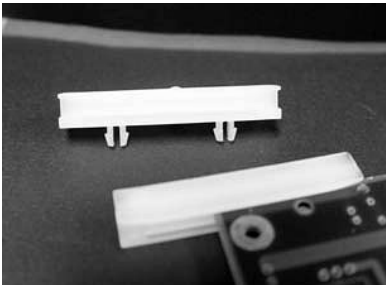

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

See Drawing for Mounting Details

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Mounting Hole Dia. "F", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-5D	50.8 [2.000]	25.4 [1.000]	2.0 [0.079]	7.0 [0.276]	7.9 [0.311]	4.4 [0.173]	3.2 [0.126]	1.6 [0.063]	200

Single-Side Horizontal Circuit Board Guides

Snap-In Mount

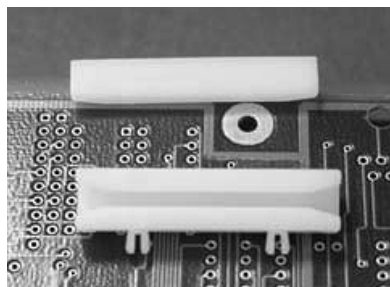


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural


See Drawing for
Mounting Details

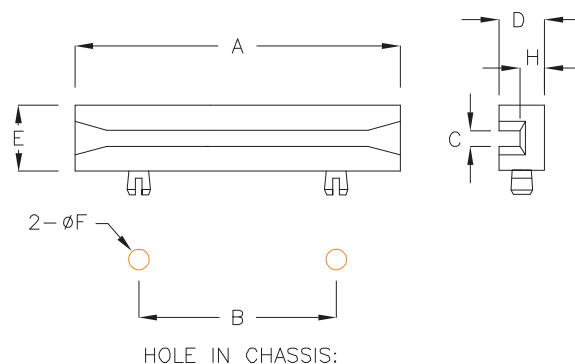

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Mounting Hole Dia. "F", ø, mm [in.]	Ref. "H", mm [in.]	Pkg.
CBG-CG-4A	38.3 [1.508]	20.2 [0.795]	2.3 [0.091]	6.5 [0.256]	9.3 [0.366]	ø4.0 [ø0.157]	3.5 [0.138]	500

Single-Side Horizontal Circuit Board Guides

Snap-In Mount

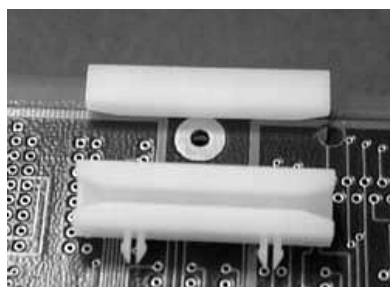


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

See Drawing for
Mounting Details

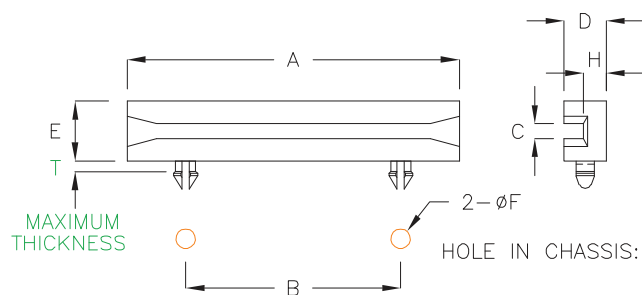

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Mounting Hole Dia. "F", ø, mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk. "T", mm [in.]	Pkg.
CBG-CG-4E	38.3 [1.508]	20.0 [0.787]	1.8 [0.071]	6.5 [0.256]	9.3 [0.366]	ø3.5 [0.138]	3.5 [0.138]	1.6 [0.063]	500
CBG-CG-4C	38.3 [1.508]	20.2 [0.795]	2.3 [0.091]	6.5 [0.256]	9.3 [0.366]	ø3.2 [0.126]	3.5 [0.138]	1.6 [0.063]	
CBG-CG-4H	50.0 [1.969]	40.0 [1.575]	2.0 [0.079]	6.0 [0.236]	7.0 [0.276]	ø3.2 [0.126]	3.0 [0.118]	1.6 [0.063]	
CBG-CG-8C	80.5 [3.169]	60.0 [2.362]	2.3 [0.091]	6.4 [0.252]	9.4 [0.370]	ø3.2 [0.126]	3.4 [0.134]	1.6 [0.063]	100
CBG-CG-8D	80.5 [3.169]	60.0 [2.362]	2.0 [0.079]	6.0 [0.236]	8.0 [0.315]	ø3.2 [0.126]	3.0 [0.118]	1.6 [0.063]	
CBG-CG-8H	80.5 [3.169]	60.0 [2.362]	2.0 [0.079]	6.0 [0.236]	8.0 [0.315]	ø3.2 [0.126]	3.0 [0.118]	2.6 [0.102]	

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Single-Side Horizontal Circuit Board Guides

Snap-In Mount




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

See Drawing for
 Mounting Details

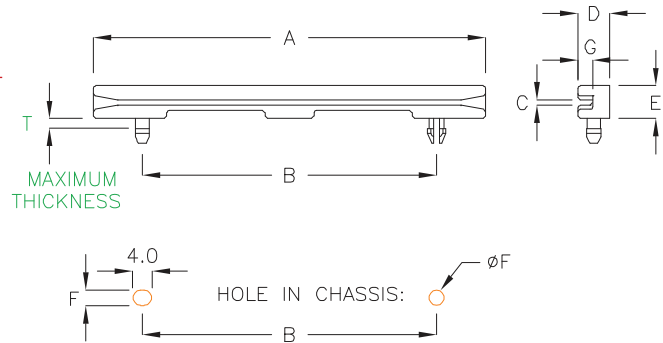

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Max. Chassis Thk. "T", mm [in.]	Standard Package
CBG-CG-8K	80.0 [3.150]	60.0 [2.362]	1.1 [0.043]	6.5 [0.256]	6.7 [0.264]	3.2 [0.126]	3.0 [0.118]	2.0 [0.079]	100




RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

See Drawing for
 Mounting Details

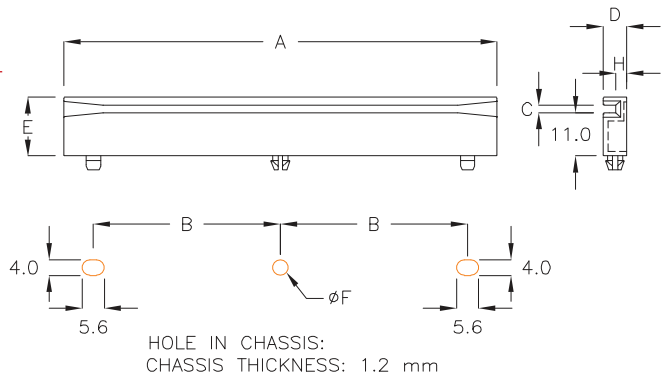

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Standard Package
CBG-CG-11K	110.0 [4.331]	47.5 [1.870]	1.8 [0.071]	6.0 [0.236]	14.9 [0.587]	ø4.0 [0.157]	100

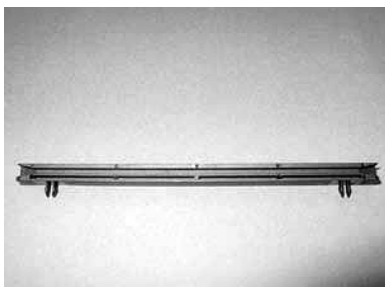


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

See Drawing for
 Mounting Details

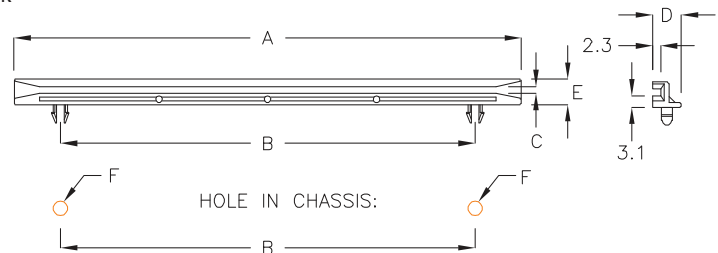


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Mounting Hole Dia. "F", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-14H	140.0 [5.512]	114.5 [4.508]	1.9 [0.075]	8.0 [0.315]	7.0 [0.276]	ø4.4 [0.173]	1.5 [0.059]	100

all dimension units in millimeter (mm) unless noted otherwise

Single-Side Horizontal Circuit Board Guides

Snap-In Mount

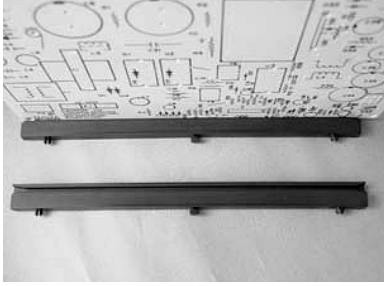


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black


See Drawing for
Mounting Details

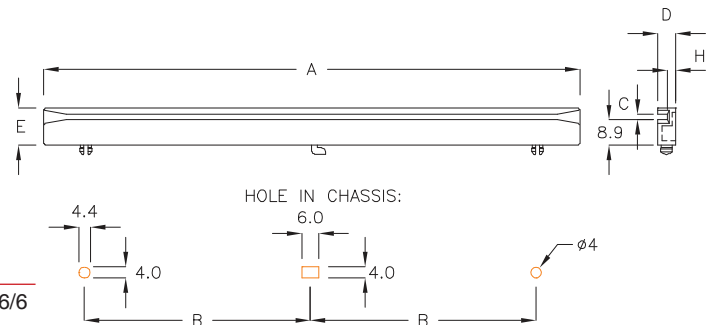

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-19C	190.0 [7.480]	80.0 [3.150]	2.0 [0.079]	6.4 [0.252]	13.1 [0.516]	3.1 [0.122]	1.1 [0.043]	100

Single-Side Horizontal Circuit Board Guides

Releasable Snap-In Mount

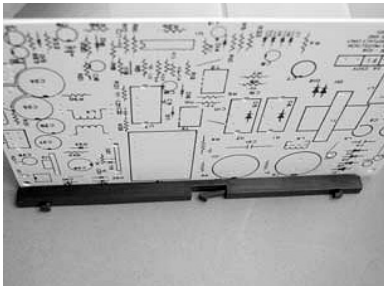


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black


See Drawing for
Mounting Details

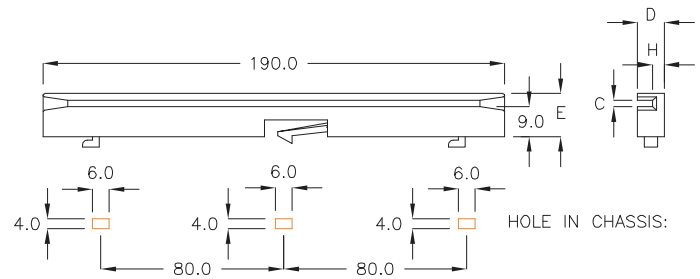

Part Number	Ref. "A", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-16C	190.0 [7.480]	2.0 [0.079]	6.4 [0.252]	13.1 [0.516]	3.2 [0.126]	1.0 [0.039]	100

Tension Circuit Board Card Guide

Snap-In Mount

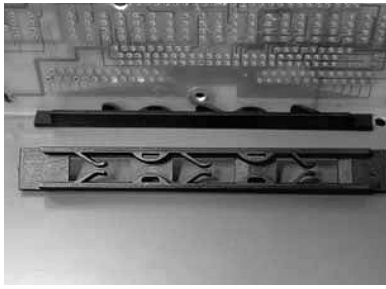


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black


See Drawing for
Mounting Details

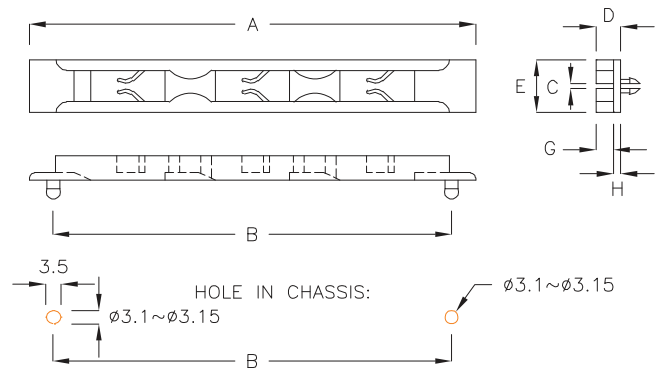

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-10B	102.8 [4.047]	91.9 [3.618]	1.1-2.2 [0.043-0.087]	5.6 [0.220]	11.9 [0.469]	3.9 [0.154]	1.7 [0.067]	2.3 [0.091]	500

Printed Circuit Board Guides

Snap-In Mount

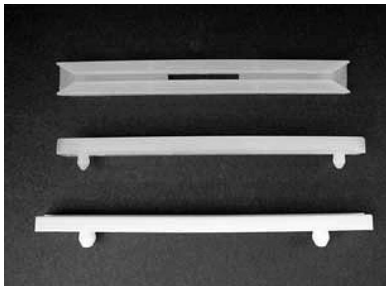


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural


See Drawing for
Mounting Details

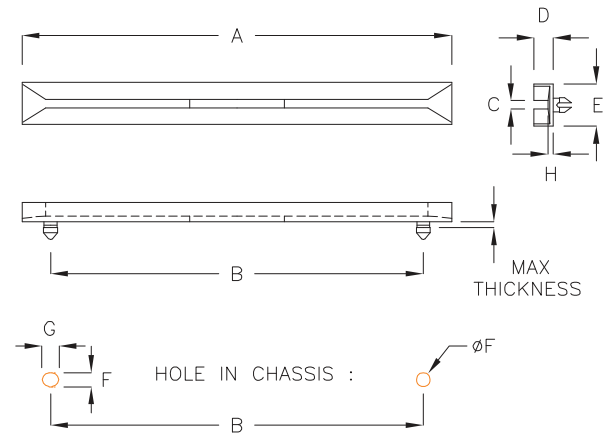

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-3A	38.0 [1.496]	25.4 [1.000]	1.9 [0.075]	4.6 [0.181]	9.6 [0.378]	3.4 [0.134]	4.0 [0.157]	1.5 [0.059]	1.2 [0.047]	500
CBG-CG-5A	50.8 [2.000]	38.0 [1.496]	2.3 [0.091]	4.6 [0.181]	9.6 [0.378]	3.4 [0.134]	4.0 [0.157]	1.5 [0.059]	1.1 [0.043]	200
CBG-CG-7A	76.6 [3.016]	63.5 [2.500]	2.2 [0.087]	4.6 [0.181]	10.0 [0.394]	3.4 [0.134]	4.0 [0.157]	1.4 [0.055]	1.2 [0.047]	100
CBG-CG-7C	76.6 [3.016]	63.5 [2.500]	2.1 [0.083]	4.1 [0.161]	10.0 [0.394]	3.4 [0.134]	4.0 [0.157]	1.1 [0.043]	1.2 [0.047]	
CBG-CG-9A	89.7 [3.531]	76.7 [3.020]	1.9 [0.075]	4.5 [0.177]	9.7 [0.382]	3.4 [0.134]	4.0 [0.157]	1.5 [0.059]	1.2 [0.047]	
CBG-CG-9F	89.2 [3.512]	76.7 [3.020]	2.3 [0.091]	4.4 [0.173]	6.4 [0.252]	3.4 [0.134]	4.0 [0.157]	1.1 [0.043]	1.2 [0.047]	
CBG-CG-10A	102.1 [4.020]	89.5 [3.524]	2.2 [0.087]	4.6 [0.181]	6.3 [0.248]	3.4 [0.134]	4.0 [0.157]	1.1 [0.043]	1.2 [0.047]	
CBG-CG-10M	100.0 [3.937]	70.0 [2.756]	2.0 [0.079]	4.3 [0.169]	7.5 [0.295]	4.8 [0.189]	6.0 [0.236]	2.3 [0.091]	1.1 [0.043]	
CBG-CG-10P	100.0 [3.937]	70.0 [2.756]	2.0 [0.079]	4.3 [0.169]	7.5 [0.295]	4.8 [0.189]	6.4 [0.252]	1.5 [0.059]	1.2 [0.047]	
CBG-CG-12D	114.3 [4.500]	88.9 [3.500]	1.9 [0.075]	6.4 [0.252]	6.4 [0.252]	4.8 [0.189]	5.5 [0.217]	1.3 [0.051]	1.2 [0.047]	
CBG-CG-13A	127.0 [5.000]	101.6 [4.000]	2.3 [0.091]	4.6 [0.181]	6.4 [0.252]	3.4 [0.134]	4.0 [0.157]	1.1 [0.043]	1.5 [0.059]	
CBG-CG-13C	110.0 [4.331]	101.6 [4.000]	2.3 [0.091]	4.6 [0.181]	6.4 [0.252]	3.4 [0.134]	4.0 [0.157]	1.1 [0.043]	1.2 [0.047]	
CBG-CG-14A	136.0 [5.354]	114.5 [4.508]	2.2 [0.087]	4.6 [0.181]	6.3 [0.248]	3.4 [0.134]	4.0 [0.157]	1.1 [0.043]	1.5 [0.059]	
CBG-CG-15C	153.8 [6.055]	141.6 [5.575]	2.1 [0.083]	4.8 [0.189]	6.5 [0.256]	3.4 [0.134]	4.0 [0.157]	1.4 [0.055]	1.2 [0.047]	
CBG-CG-18A	181.1 [7.130]	161.3 [6.350]	2.0 [0.079]	4.6 [0.181]	6.5 [0.256]	3.4 [0.134]	4.6 [0.181]	1.2 [0.047]	1.2 [0.047]	
CBG-CG-19A	191.1 [7.524]	177.0 [6.969]	2.0 [0.079]	5.5 [0.217]	6.4 [0.252]	3.4 [0.134]	4.0 [0.157]	1.8 [0.071]	1.2 [0.047]	
CBG-CG-21A	217.8 [8.575]	205.0 [8.071]	2.0 [0.079]	4.6 [0.181]	6.6 [0.260]	3.4 [0.134]	4.0 [0.157]	1.2 [0.047]	1.0 [0.039]	
CBG-CG-21B	218.7 [8.610]	205.0 [8.071]	2.2 [0.087]	7.7 [0.303]	6.6 [0.260]	3.4 [0.134]	4.0 [0.157]	1.3 [0.051]	1.2 [0.047]	

Printed Circuit Board Guides

Snap-In Mount

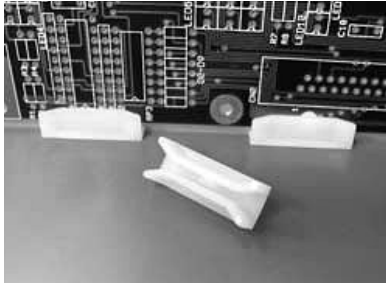


RoHS COMPLIANT


Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Natural

See Drawing for
Mounting Details

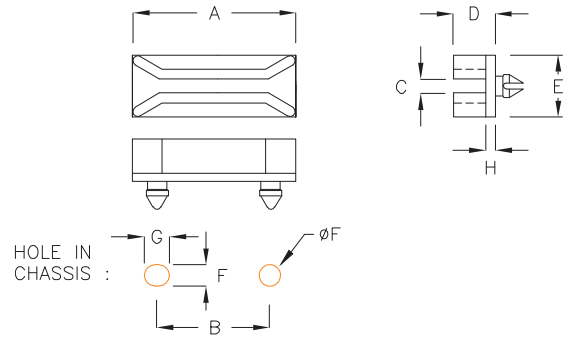

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-2A	26.0 [1.024]	18.0 [0.709]	1.9 [0.075]	6.8 [0.268]	9.7 [0.382]	3.4 [0.134]	4.0 [0.157]	1.3 [0.051]	1.2 [0.047]	500

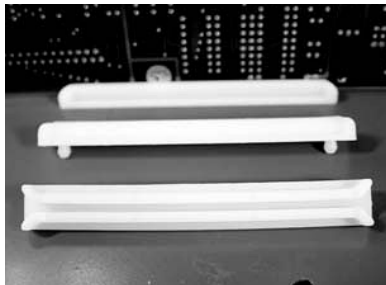


RoHS COMPLIANT

Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Natural


See Drawing for
Mounting Details

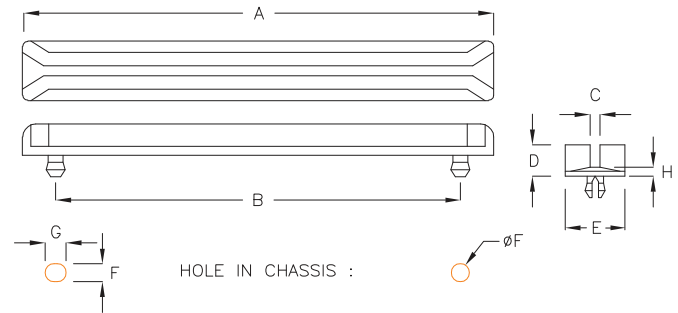

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-9B	89.2 [3.512]	76.9 [3.028]	1.9 [0.075]	6.0 [0.236]	11.3 [0.445]	3.4 [0.134]	4.0 [0.157]	1.6 [0.063]	1.2 [0.047]	100

High Retention Circuit Board Guides

Deep Channel, Snap-In Mount

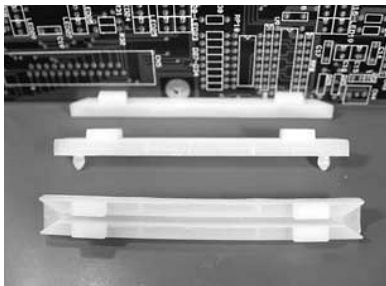


RoHS COMPLIANT

Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Natural

See Drawing for
Mounting Details

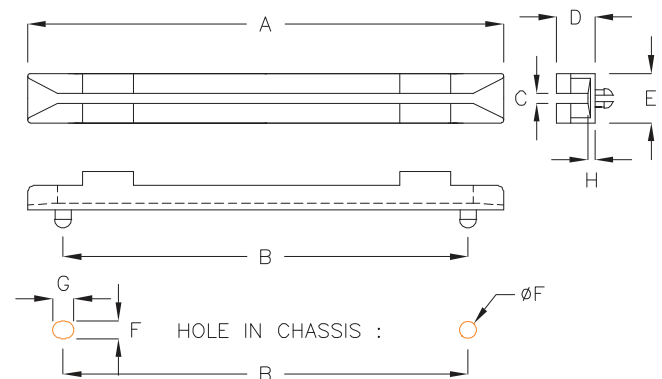

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-9AW	89.7 [3.531]	76.7 [3.020]	1.9 [0.075]	11.6 [0.457]	9.7 [0.382]	3.4 [0.134]	4.0 [0.157]	1.3 [0.051]	1.2 [0.047]	100
CBG-CG-9D	89.7 [3.531]	76.8 [3.024]	1.9 [0.075]	7.1 [0.280]	9.5 [0.374]	3.4 [0.134]	4.0 [0.157]	1.4 [0.055]	1.2 [0.047]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Printed Circuit Board Guides

Snap-In Mount

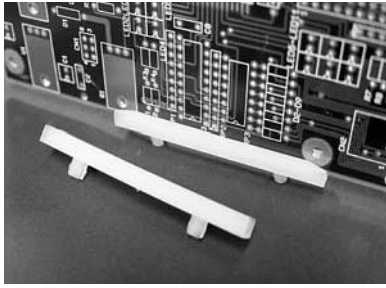


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

See Drawing for
Mounting Details

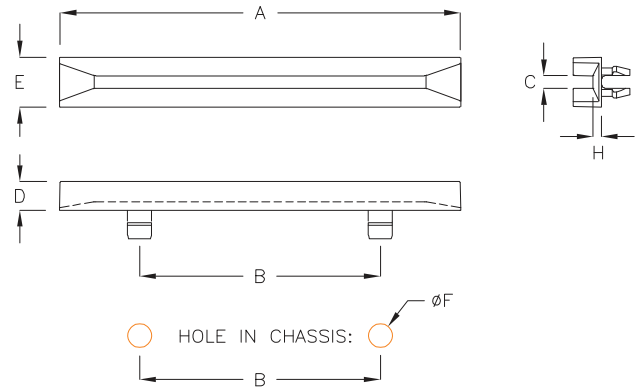

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Mounting Hole Dia. "F", ø, mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-6H	63.5 [2.500]	38.1 [1.500]	1.9 [0.075]	4.5 [0.177]	7.9 [0.311]	ø4.6 [0.181]	1.3 [0.051]	1.6 [0.063]	200




RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

See Drawing for
Mounting Details

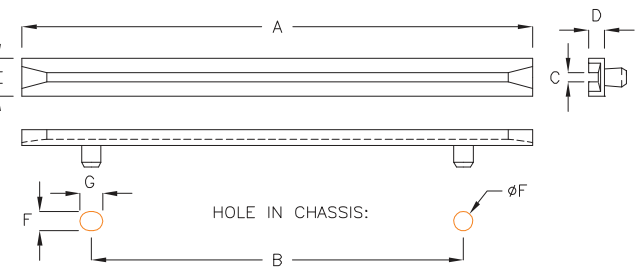

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-10N	101.6 [4.000]	88.9 [3.500]	1.9 [0.075]	4.4 [0.173]	6.4 [0.252]	3.2 [0.126]	4.0 [0.157]	1.1 [0.043]	100
CBG-CG-16N	164.1 [6.461]	152.4 [6.000]	2.0 [0.079]	4.4 [0.173]	6.5 [0.256]	3.2 [0.126]	3.9 [0.154]	1.1 [0.043]	

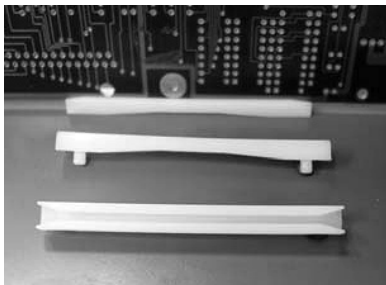


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

See Drawing for
Mounting Details

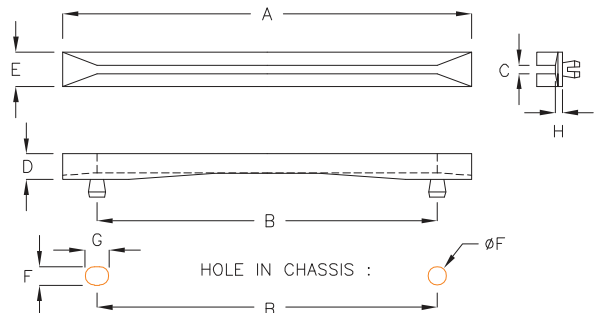


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-7B	76.2 [3.000]	63.5 [2.500]	1.9 [0.075]	4.8 [0.189]	6.4 [0.252]	3.2 [0.126]	4.1 [0.161]	0.9 [0.035]	1.3 [0.051]	100

all dimension units in millimeter (mm) unless noted otherwise

Printed Circuit Board Guides

Snap-In Mount

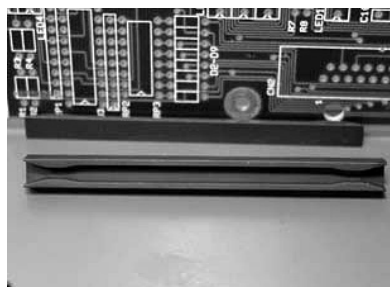


RoHS COMPLIANT

Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Black

See Drawing for
Mounting Details

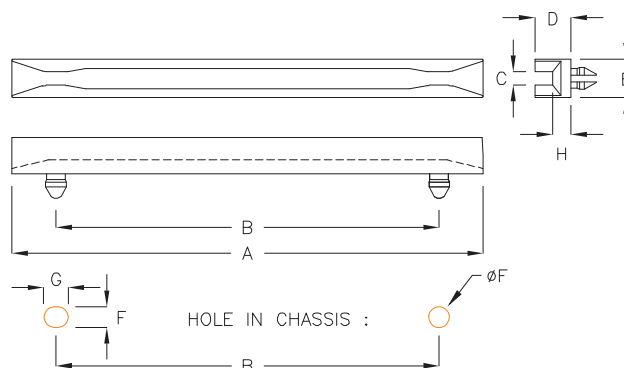

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-6A	76.8 [3.024]	62.5 [2.461]	2.2 [0.087]	5.9 [0.232]	6.3 [0.248]	3.4 [0.134]	4.0 [0.157]	3.0 [0.118]	1.0 [0.039]	200




RoHS COMPLIANT

Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Black

See Drawing for
Mounting Details

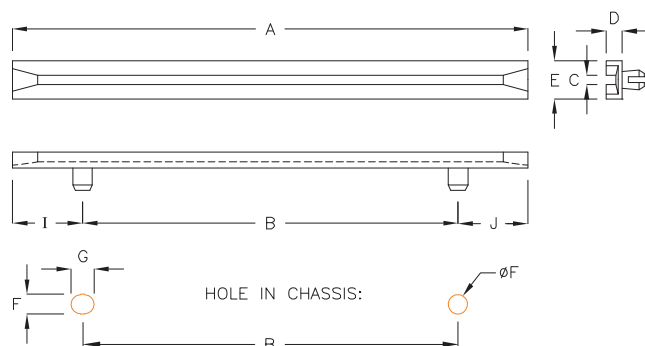

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "I", mm [in.]	Ref. "J", mm [in.]	Chassis Thk., mm [in.]
CBG-CG-5C	63.5 [2.500]	38.1 [1.500]	2.3 [0.091]	6.4 [0.252]	6.4 [0.252]	4.5 [0.177]	5.1 [0.201]	12.7 [0.500]	12.7 [0.500]	1.2-1.6 [0.047-0.063]
CBG-CG-6F	63.5 [2.500]	38.1 [1.500]	1.9 [0.075]	4.5 [0.177]	7.9 [0.311]	4.6 [0.181]	5.0 [0.197]	12.7 [0.500]	12.7 [0.500]	1.2-1.6 [0.047-0.063]
CBG-CG-8L	88.9 [3.500]	63.5 [2.500]	1.9 [0.075]	4.5 [0.177]	7.9 [0.311]	4.6 [0.181]	5.0 [0.197]	12.7 [0.500]	12.7 [0.500]	1.4-1.6 [0.055-0.063]
CBG-CG-9AL	89.1 [3.508]	77.4 [3.047]	2.2 [0.087]	7.1 [0.280]	10.0 [0.394]	3.4 [0.134]	4.0 [0.157]	5.1 [0.201]	5.1 [0.201]	1.1 [0.043]

Package Information:


Part Number	Standard Package
CBG-CG-5C	200
CBG-CG-6F	
CBG-CG-8L	100
CBG-CG-9AL	

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Low Profile Circuit Board Guides
One-Side Funnel, Snap-In Mount

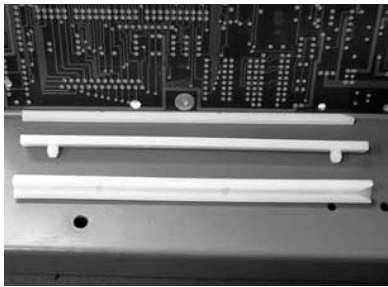

RoHS COMPLIANT


Specifications:

Material: Nylon
6/6


UL Rating: 94V-2

Color: Natural

See Drawing for Mounting Details

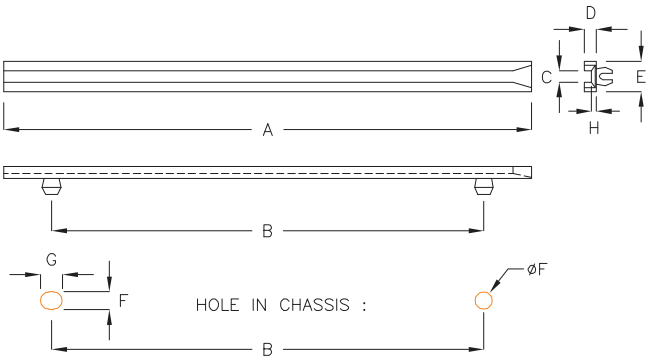

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-14	140.2 [5.520]	114.8 [4.520]	2.0 [0.079]	3.2 [0.126]	8.0 [0.315]	4.8 [0.189]	5.9 [0.232]	1.3 [0.051]	1.2 [0.047]	100
CBG-CG-14D	140.2 [5.520]	114.8 [4.520]	3.0 [0.118]	3.2 [0.126]	8.0 [0.315]	4.8 [0.189]	5.9 [0.232]	1.3 [0.051]	1.7 [0.067]	

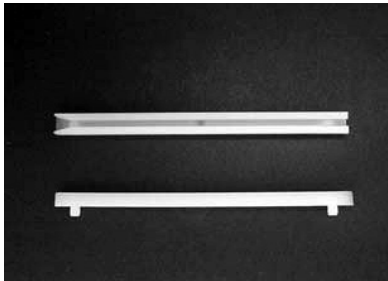

RoHS COMPLIANT


Specifications:

Material: Nylon
6/6

UL Rating: 94V-2

Color: Natural


See Drawing for Mounting Details

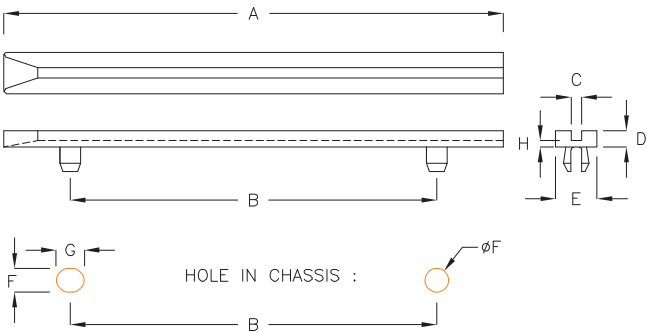

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-20A	203.2 [8.000]	177.8 [7.000]	2.0 [0.079]	3.2 [0.126]	7.9 [0.311]	4.6 [0.181]	5.4 [0.213]	1.3 [0.051]	1.7 [0.067]	100

Printed Circuit Board Guides

Snap-In Mount

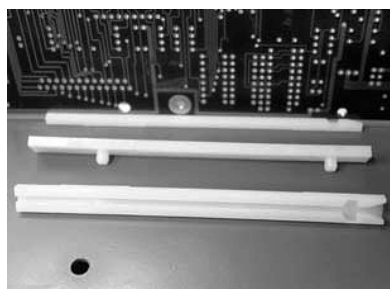


RoHS COMPLIANT


Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Natural

See Drawing for
Mounting Details

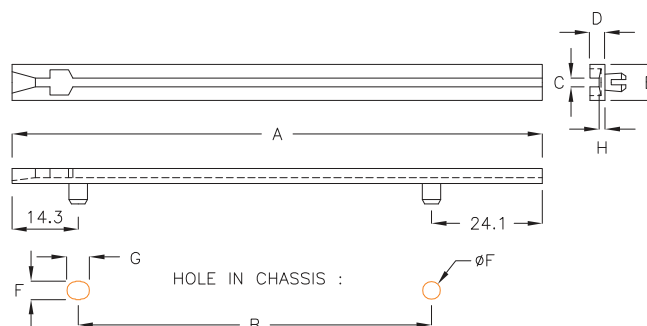

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Pkg.
CBG-CG-11A	115.5 [4.547]	77.1 [3.035]	2.0 [0.079]	3.3 [0.130]	7.9 [0.311]	4.0 [0.157]	4.8 [0.189]	1.3 [0.051]	1.2 [0.047]	100

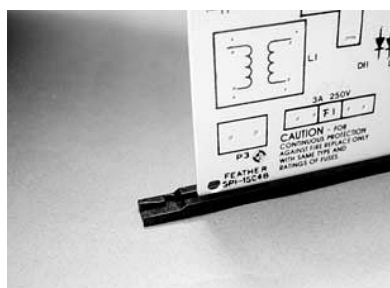


RoHS COMPLIANT


Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Black

See Drawing for
Mounting Details

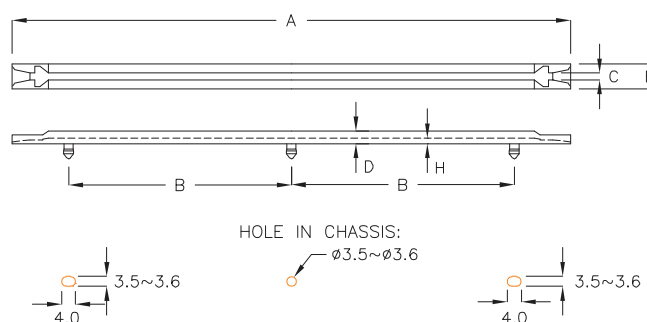

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-28A	280.0 [11.024]	119.8 [4.717]	2.3 [0.091]	4.5 [0.177]	9.0 [0.354]	2.0 [0.079]	1.7 [0.067]	100

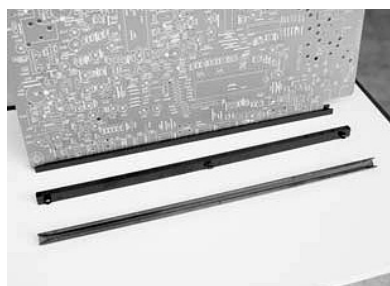


RoHS COMPLIANT

Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Black

See Drawing for
Mounting Details

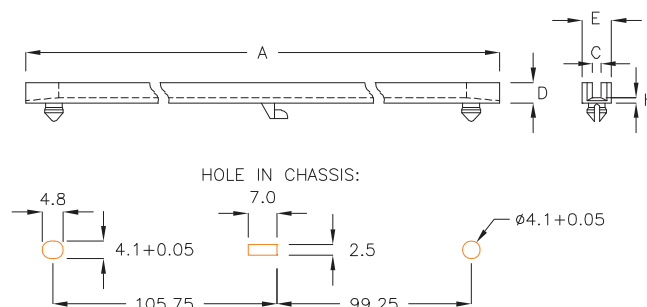


Part Number	Ref. "A", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-21C	218.0 [8.583]	1.9 [0.075]	4.7 [0.185]	6.6 [0.260]	1.3 [0.051]	1.5 [0.059]	100

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Printed Circuit Board Guides
Snap-In Mount

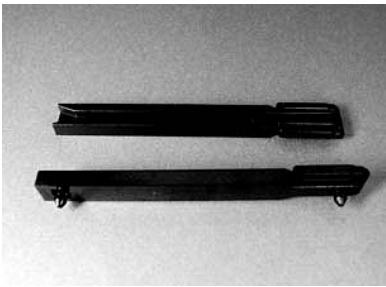


RoHS COMPLIANT


Specifications:

Material: Nylon
6/6
UL Rating: 94V-2
Color: Black

See Drawing for
Mounting Details

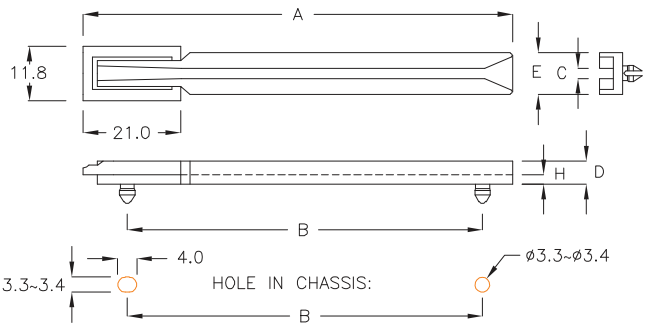

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-09H	92.7 [3.650]	76.7 [3.020]	2.2 [0.087]	5.0 [0.197]	9.0 [0.354]	2.0 [0.079]	1.2 [0.047]	100
CBG-CG-09J	99.5 [3.917]	76.7 [3.020]	2.2 [0.087]	5.0 [0.197]	9.0 [0.354]	2.0 [0.079]	1.2 [0.047]	
CBG-CG-09C	72.6 [2.858]	50.0 [1.969]	1.9 [0.075]	5.0 [0.197]	9.0 [0.354]	2.0 [0.079]	1.0 [0.039]	

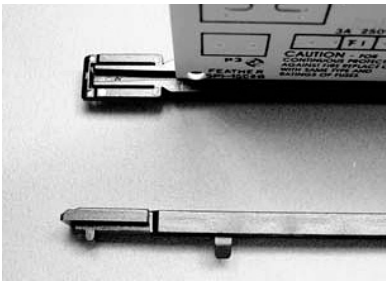


RoHS COMPLIANT

Specifications:


Material: Nylon
6/6
UL Rating: 94V-2
Color: Black

See Drawing for
Mounting Details

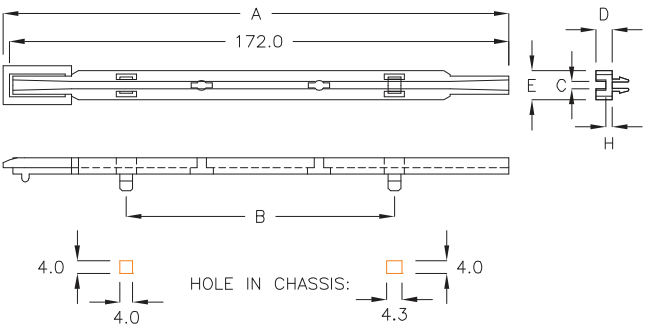

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Slot Width "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "H", mm [in.]	Max. Chassis Thk., mm [in.]	Standard Package
CBG-CG-17A	175.0 [6.890]	102.0 [4.016]	2.2 [0.087]	5.0 [0.197]	9.0 [0.354]	2.0 [0.079]	1.6 [0.063]	100

Printed Circuit Board Pullers

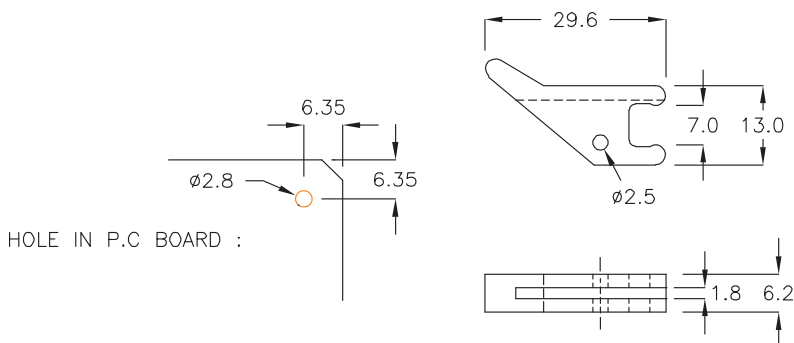


RoHS COMPLIANT

Specifications

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included*See Drawing for Installation Details*

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-10	1.8 mm [0.071 in.]	200

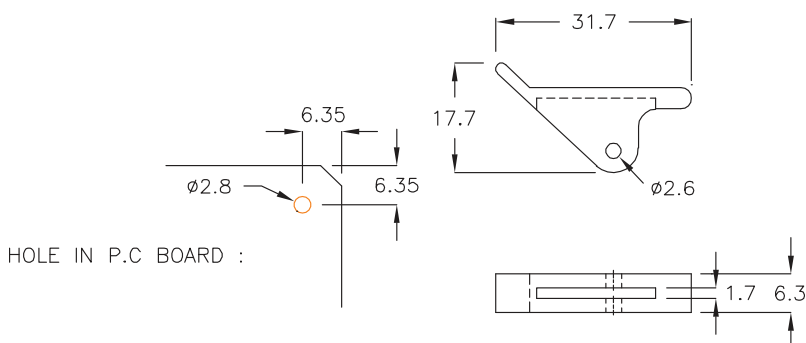


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included*See Drawing for Installation Details*

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-15	1.7 mm [0.067 in.]	200

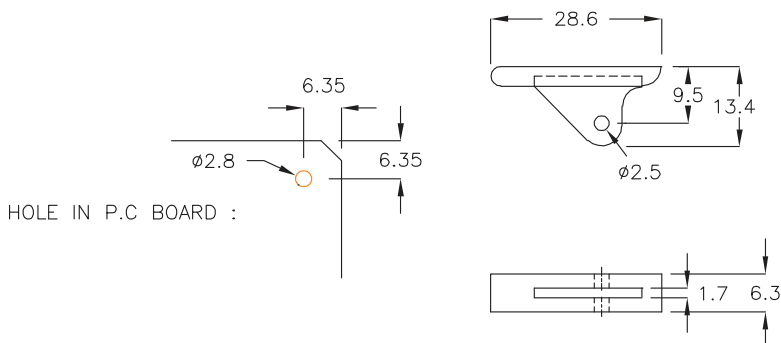


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included*See Drawing for Installation Details*

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-20	1.7 mm [0.067 in.]	200

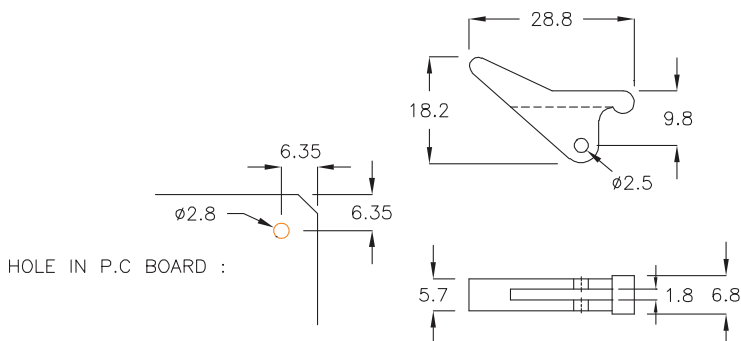

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included*See Drawing for Installation Details*

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-25	1.8 mm [0.071 in.]	200

Printed Circuit Board Pullers

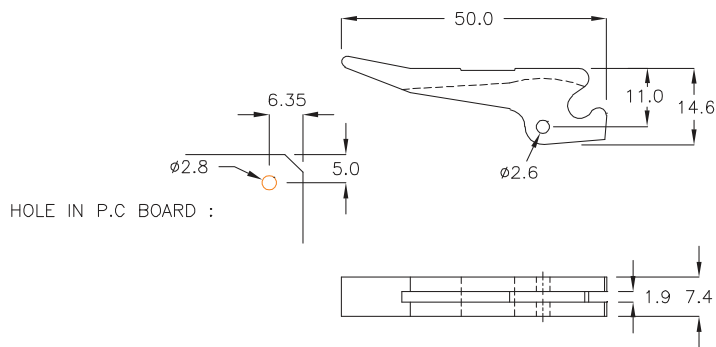

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-30	1.9 mm [0.075 in.]	200

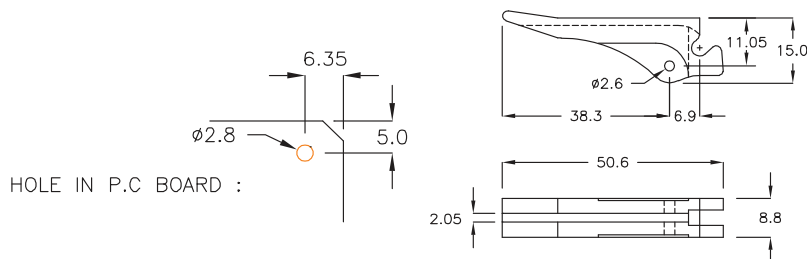

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-31	2.1 mm [0.081 in.]	200

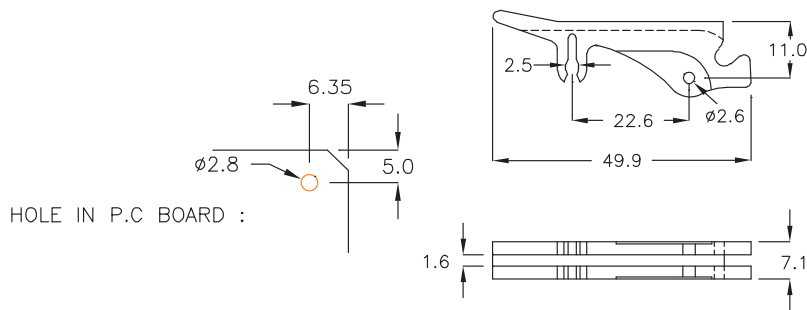

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-31C	1.6 mm [0.063 in.]	200

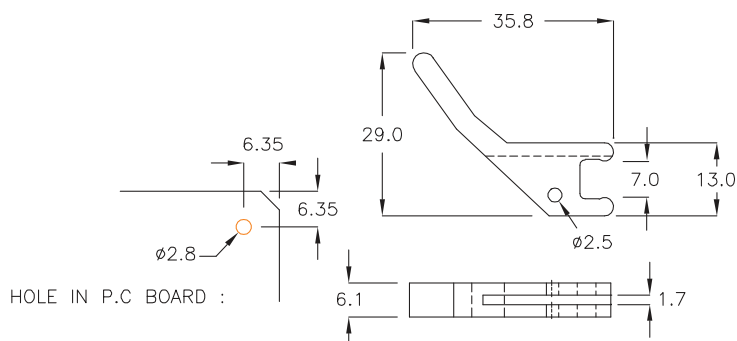

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included

See Drawing for Installation Details


Part Number	Circuit Board Thickness	Standard Package
CBE-CP-32	1.7 mm [0.067 in.]	200

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Printed Circuit Board Pullers

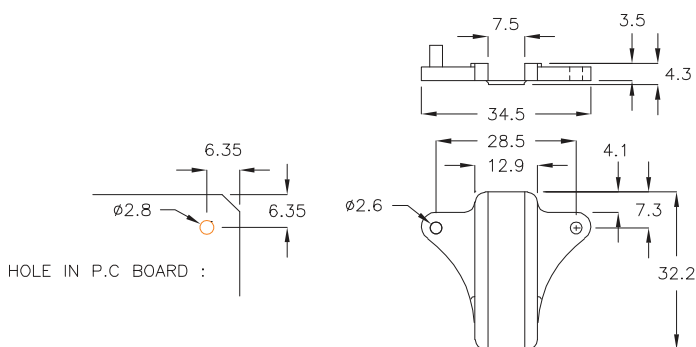

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

One-Piece Design, No Roll Pin

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-33	1.9 mm [0.075 in.]	200

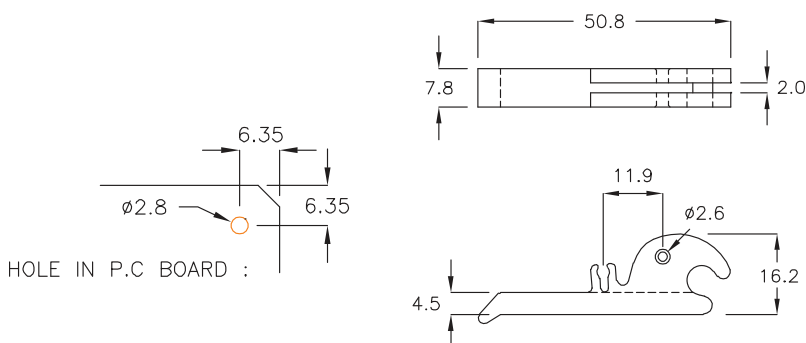

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-34	2.0 mm [0.079 in.]	200

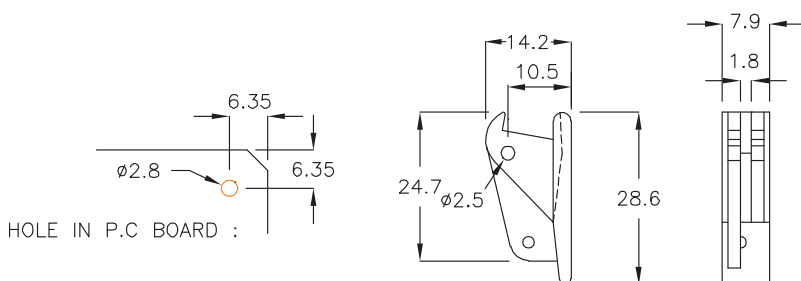

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Roll Pin included

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-35	1.8 mm [0.071 in.]	200

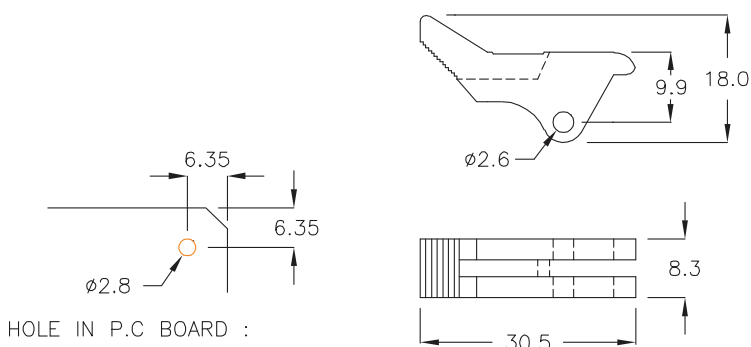

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

Roll Pin included

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-36	2.0 mm [0.079 in.]	200

Printed Circuit Board Pullers

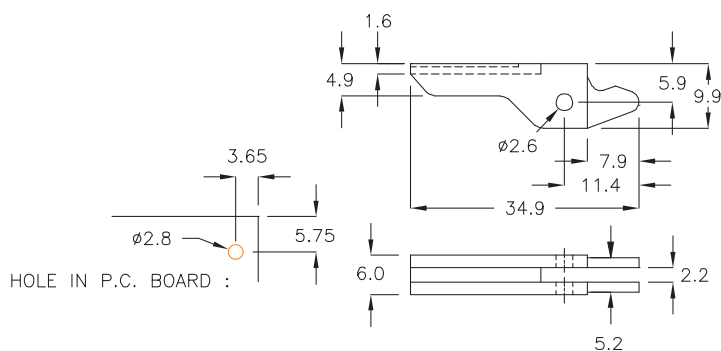

RoHS COMPLIANT


Specifications:

Material:	Nylon 6/6
UL Rating:	94V-2
Color:	Natural

Roll Pin included

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-37	2.2 mm [0.087 in.]	200

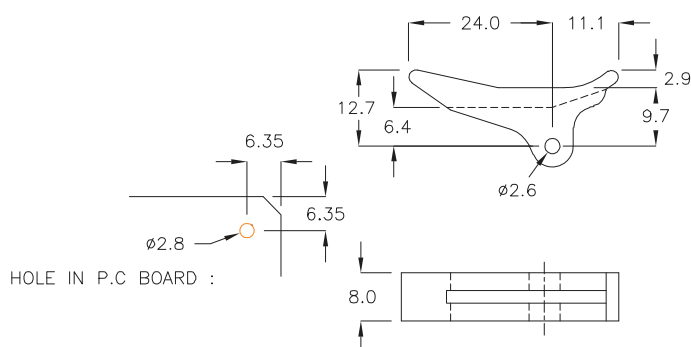

RoHS COMPLIANT

Specifications:

Material:	Nylon 6/6
UL Rating:	94V-2
Color:	Natural

Roll Pin included

See Drawing for Installation Details

Part Number	Circuit Board Thickness	Standard Package
CBE-CP-39	2.0 mm [0.079 in.]	200

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Snap Rivets


Nylon Push-Snap Rivets



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black
 White (Special Order)
Package: 1000 EA

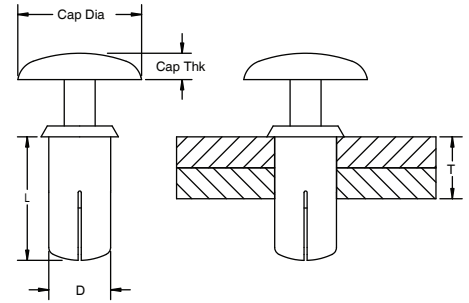

Part Number	Hole Dia., "D" mm [in.]	Rivet Length, "L" mm [in.]	Binding Thickness, "T" mm [in.]
Rivet Cap Diameter = 4.2 mm [0.165 in.] Rivet Cap Thickness = 1.2 mm [0.047 in.]			
PSR-20			
PSR-20-024	2.0 [0.079]	2.4 [0.094]	0.6-1.2 [0.024-0.047]
PSR-20-032		3.2 [0.126]	1.3-2.0 [0.051-0.079]
PSR-20-040		4.0 [0.157]	2.1-2.8 [0.083-0.110]
PSR-20-048		4.8 [0.189]	2.9-3.6 [0.114-0.142]
PSR-20-056		5.6 [0.220]	3.7-4.4 [0.146-0.173]
PSR-20-064		6.4 [0.252]	4.5-5.2 [0.177-0.205]
Rivet Cap Diameter = 5.0 mm [0.197 in.] Rivet Cap Thickness = 1.4 mm [0.055 in.]			
PSR-26			
PSR-26-032	2.6 [0.102]	3.2 [0.126]	1.0-2.0 [0.039-0.079]
PSR-26-042		4.2 [0.165]	2.1-3.0 [0.083-0.118]
PSR-26-048		4.8 [0.189]	2.7-3.6 [0.106-0.142]
PSR-26-055		5.5 [0.217]	3.4-4.3 [0.134-0.169]
PSR-26-064		6.4 [0.252]	4.3-5.2 [0.169-0.205]
PSR-26-072		7.2 [0.283]	5.1-6.0 [0.201-0.236]
Rivet Cap Diameter = 6.4 mm [0.252 in.] Rivet Cap Thickness = 1.6 mm [0.063 in.]			
PSR-30			
PSR-30-035	3.0 [0.118]	3.5 [0.138]	1.0-2.0 [0.039-0.079]
PSR-30-045		4.5 [0.177]	2.0-3.0 [0.079-0.118]
PSR-30-055		5.5 [0.217]	3.0-4.0 [0.118-0.157]
PSR-30-065		6.5 [0.256]	4.0-5.0 [0.157-0.197]
PSR-30-075		7.5 [0.295]	5.0-6.0 [0.197-0.236]
PSR-30-080		8.0 [0.315]	5.5-6.5 [0.217-0.256]
PSR-30-090		9.0 [0.354]	6.5-7.5 [0.256-0.295]
PSR-30-100		10.0 [0.394]	7.5-8.5 [0.295-0.335]
PSR-30-145		14.5 [0.571]	11.5-13.0 [0.453-0.512]
PSR-30-230		23.0 [0.906]	20.5-21.5 [0.807-0.846]
Rivet Cap Diameter = 6.4 mm [0.252 in.] Rivet Cap Thickness = 1.6 mm [0.063 in.]			
PSR-35			
PSR-35-035	3.5 [0.135]	3.5 [0.138]	1.1-2.1 [0.043-0.083]
PSR-35-045		4.5 [0.177]	2.2-3.1 [0.087-0.122]
PSR-35-050		5.0 [0.197]	2.7-3.6 [0.106-0.142]
PSR-35-055		5.5 [0.217]	3.2-4.1 [0.126-0.161]
PSR-35-060		6.0 [0.236]	3.7-4.6 [0.146-0.181]
PSR-35-070		7.0 [0.276]	4.7-5.6 [0.185-0.220]
PSR-35-080		8.0 [0.315]	5.7-6.6 [0.224-0.260]

Part Number	Hole Dia., "D" mm [in.]	Rivet Length, "L" mm [in.]	Binding Thickness, "T" mm [in.]
Rivet Cap Diameter = 8.0 mm [0.315 in.] Rivet Cap Thickness = 1.8 mm [0.071 in.]			
PSR-40			
PSR-40-050	4.0 [0.157]	5.0 [0.197]	2.5-3.5 [0.098-0.138]
PSR-40-060		6.0 [0.236]	3.5-4.5 [0.138-0.177]
PSR-40-070		7.0 [0.276]	4.5-5.5 [0.177-0.217]
PSR-40-080		8.0 [0.315]	5.5-6.5 [0.217-0.256]
PSR-40-090		9.0 [0.354]	6.5-7.5 [0.256-0.295]
PSR-40-100		10.0 [0.394]	7.5-8.5 [0.295-0.335]
PSR-40-120		12.0 [0.472]	9.0-10.5 [0.354-0.413]
Rivet Cap Diameter = 9.0 mm [0.354 in.] Rivet Cap Thickness = 2.2 mm [0.087 in.]			
PSR-50			
PSR-50-045	5.0 [0.197]	4.5 [0.177]	1.5-2.5 [0.059-0.098]
PSR-50-055		5.5 [0.217]	2.5-3.5 [0.098-0.138]
PSR-50-065		6.5 [0.256]	3.5-4.5 [0.138-0.177]
PSR-50-075		7.5 [0.295]	4.5-5.5 [0.177-0.217]
PSR-50-085		8.5 [0.335]	5.5-6.5 [0.217-0.256]
PSR-50-095		9.5 [0.374]	6.5-7.5 [0.256-0.295]
PSR-50-105		10.5 [0.413]	7.5-8.5 [0.295-0.335]
Rivet Cap Diameter = 12.0 mm [0.472 in.] Rivet Cap Thk.(PSR-60-060) =2.5 mm [0.098 in.] Rivet Cap Thk. (PSR-60-080) = 3.0 mm [0.118 in.]			
PSR-60			
PSR-60-060	6.0 [0.236]	6.0 [0.236]	2.5-4.0 [0.098-0.157]
PSR-60-080		8.0 [0.315]	4.0-5.5 [0.157-0.217]

Part Number	Hole Dia., "D" mm [in.]	Rivet Length, "L" mm [in.]	Binding Thickness, "T" mm [in.]
Special Order Parts			
PSR-20-050	2.0 [0.079]	5.0 [0.197]	2.5-3.5 [0.098-0.138]
PSR-20-060		6.0 [0.236]	3.5-4.5 [0.138-0.177]
PSR-30-060		6.0 [0.236]	3.5-4.5 [0.138-0.177]
PSR-30-130	3.0 [0.118]	13.0 [0.512]	10.0-11.0 [0.394-0.433]
PSR-30-155		15.5 [0.610]	11.5-13.0 [0.453-0.512]
PSR-30-185		18.5 [0.728]	15.0-16.5 [0.591-0.650]
PSR-35-090	3.5 [0.136]	9.0 [0.354]	6.0-7.0 [0.236-0.276]
PSR-35-230		23.0 [0.906]	18.5-20.0 [0.728-0.787]
PSR-40-137	4.0 [0.157]	13.7 [0.539]	11.0-12.0 [0.433-0.472]
PSR-40-153		15.3 [0.602]	11.5-13.0 [0.453-0.512]
PSR-40-200		20.0 [0.787]	15.0-17.0 [0.591-0.669]
PSR-40-245		24.5 [0.965]	22.0-23.0 [0.866-0.906]

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Metric Plastic Screws

Pan Head Nylon/Polycarbonate Screws


PNP



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
Polycarbonate(PC)
UL Rating: 94V-2
Color: Natural (Nylon)
Clear(PC)

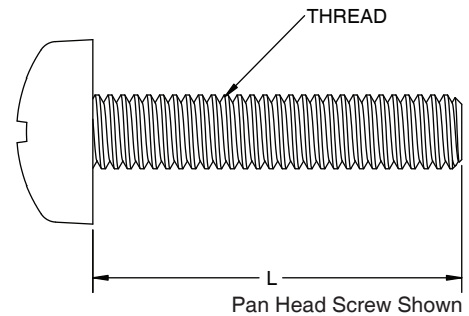


Part Number (Nylon)	Thread Size	Length "L" mm [in.]	Additional Material*	Std. Package
Head Style Code: PNP (Pan Head, Phillips)				PNP
PSS-M16-05-PNP-NL	M1.6	5.0 [0.197]	Other Standard Material: <u>PC</u> (Polycarbonate) *Special Order Only: <u>NL15</u> (15% Glass Nylon) <u>NL30</u> (30% Glass Nylon)	1000
PSS-M2-03-PNP-NL	M2	3.0 [0.118]		
PSS-M2-04-PNP-NL	M2	4.0 [0.157]		
PSS-M2-05-PNP-NL	M2	5.0 [0.197]		
PSS-M2-10-PNP-NL	M2	10.0 [0.394]		
PSS-M25-04-PNP-NL	M2.5	4.0 [0.157]		
PSS-M25-06-PNP-NL	M2.5	6.0 [0.236]		
PSS-M25-07-PNP-NL	M2.5	7.0 [0.276]		
PSS-M25-10-PNP-NL	M2.5	10.0 [0.394]		
PSS-M3-03-PNP-NL	M3	3.0 [0.118]		
PSS-M3-04-PNP-NL	M3	4.0 [0.157]		
PSS-M3-06-PNP-NL	M3	6.0 [0.236]		
PSS-M3-08-PNP-NL	M3	8.0 [0.315]		
PSS-M3-10-PNP-NL	M3	10.0 [0.394]		
PSS-M3-12-PNP-NL	M3	12.0 [0.472]		
PSS-M3-15-PNP-NL	M3	15.0 [0.591]		
PSS-M3-20-PNP-NL	M3	20.0 [0.787]		
PSS-M3-25-PNP-NL	M3	25.0 [0.984]		
PSS-M3-30-PNP-NL	M3	30.0 [1.181]		
PSS-M4-08-PNP-NL	M4	8.0 [0.315]		
PSS-M4-10-PNP-NL	M4	10.0 [0.394]		
PSS-M4-12-PNP-NL	M4	12.0 [0.472]		
PSS-M4-16-PNP-NL	M4	16.0 [0.630]		
PSS-M4-20-PNP-NL	M4	20.0 [0.787]		
PSS-M4-25-PNP-NL	M4	25.0 [0.984]		
PSS-M4-30-PNP-NL	M4	30.0 [1.181]		
PSS-M5-08-PNP-NL	M5	8.0 [0.315]	*Special Order Only: <u>NL15</u> (15% Glass Nylon) <u>NL30</u> (30% Glass Nylon)	
PSS-M5-15-PNP-NL	M5	15.0 [0.591]		
PSS-M5-20-PNP-NL	M5	20.0 [0.787]		
PSS-M5-30-PNP-NL	M5	30.0 [1.181]		
PSS-M6-15-PNP-NL	M6	15.0 [0.591]	*Special Order Only: <u>NL15</u> (15% Glass Nylon) <u>NL30</u> (30% Glass Nylon)	
PSS-M6-16-PNP-NL	M6	16.0 [0.630]		
PSS-M6-20-PNP-NL	M6	20.0 [0.787]		
PSS-M6-30-PNP-NL	M6	30.0 [1.181]		

Metric Screw Head/Driver Styles		
Head Style Code	Head Style	Driver Style
Standard		
PNP	Pan	Phillips
FTP	90° Flat	Phillips
HXN	Hex	None
Special Order Only		
BDS	Binding	Slotted
BDP	Binding	Phillips
FLS	Fillister	Slotted
FLP	Fillister	Phillips
PNS	Pan	Slotted
HXS	Hex	Slotted
FTS	90 Flat	Slotted

Metric Plastic Screws

Flat Head Nylon/Polycarbonate Screws

FTP

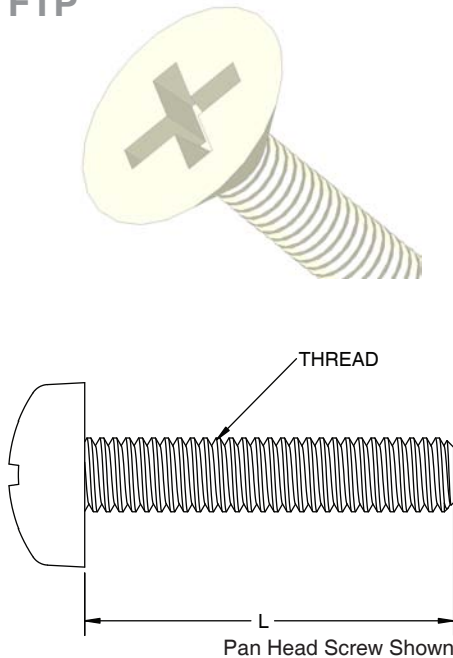


Part Number (Nylon)	Thread size	Length "L" (including head height) mm [in.]	Additional Material*	Standard Package
Head Style Code: FTP (Flat Head, Phillips)				FTP
PSS-M16-05-FTP-NL	M1.6	5.0 [0.197]	PC (Polycarbonate)	1000
PSS-M3-04-FTP-NL	M3	4.0 [0.157]	Other Standard Material: PC (Polycarbonate) *Special Order Only: NL15 (15% Glass Nylon) NL30 (30% Glass Nylon)	
PSS-M3-06-FTP-NL	M3	6.0 [0.236]		
PSS-M3-08-FTP-NL	M3	8.0 [0.315]		
PSS-M3-10-FTP-NL	M3	10.0 [0.394]		
PSS-M3-12-FTP-NL	M3	12.0 [0.472]		
PSS-M3-25-FTP-NL	M3	25.0 [0.984]		
PSS-M3-30-FTP-NL	M3	30.0 [1.181]		
PSS-M4-06-FTP-NL	M4	6.0 [0.236]		
PSS-M4-08-FTP-NL	M4	8.0 [0.315]		
PSS-M4-10-FTP-NL	M4	10.0 [0.394]		
PSS-M4-12-FTP-NL	M4	12.0 [0.472]		
PSS-M4-14-FTP-NL	M4	14.0 [0.551]		
PSS-M4-16-FTP-NL	M4	16.0 [0.630]		
PSS-M4-20-FTP-NL	M4	20.0 [0.787]		
PSS-M4-25-FTP-NL	M4	25.0 [0.984]		
PSS-M4-30-FTP-NL	M4	30.0 [1.181]		

Metric Plastic Screws

Hex Head Nylon/Polycarbonate Screws

HXN

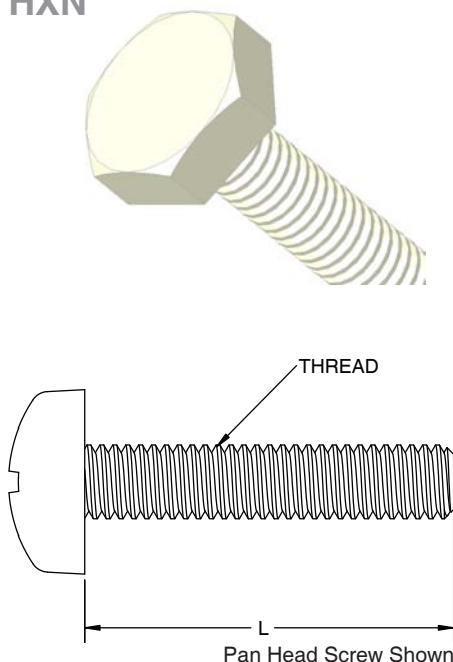

Part Number (Nylon)	Thread Size	Length "L", mm [in.]	Additional Material*	Standard Package
Head Style Code: HXN (Hex Head)				HXN
PSS-M5-15-HXN-NL	M5	15.0 [0.591]	Other Standard Material: <u>PC</u> (Polycarbonate) *Special Order Only: NL15 (15% Glass Nylon) NL30 (30% Glass Nylon)	1000
PSS-M5-20-HXN-NL	M5	20.0 [0.787]		
PSS-M5-30-HXN-NL	M5	30.0 [1.181]		
PSS-M6-15-HXN-NL	M6	15.0 [0.591]	*Special Order Only: NL15 (15% Glass Nylon) NL30 (30% Glass Nylon)	
PSS-M6-16-HXN-NL	M6	16.0 [0.630]		
PSS-M6-20-HXN-NL	M6	20.0 [0.787]		
PSS-M6-30-HXN-NL	M6	30.0 [1.181]		
PSS-M8-20-HXN-NL	M8	20.0 [0.787]		
PSS-M8-30-HXN-NL	M8	30.0 [1.181]		
PSS-M8-40-HXN-NL	M8	40.0 [1.575]		
PSS-M8-45-HXN-NL	M8	45.0 [1.772]		
PSS-M10-30-HXN-NL	M10	30.0 [1.181]		
PSS-M10-40-HXN-NL	M10	40.0 [1.575]		
PSS-M10-45-HXN-NL	M10	45.0 [1.772]		
PSS-M10-55-HXN-NL	M10	55.0 [2.165]		


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Standard Plastic Screws


Nylon/Polycarbonate Screws

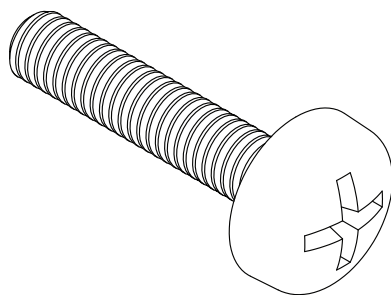

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
Polycarbonate(PC)
UL Rating: 94V-2
Color: Natural (Nylon)
Clear(PC)

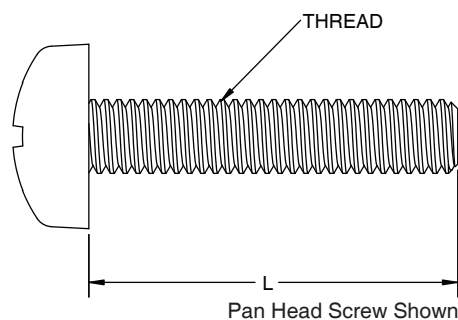

Part Number (Fill [] with Head Style Code)	Thread size	Length, mm [in.]	Additional Material*
PSS-0256-0187-[]-[]-NL	2-56	4.8 [0.187]	Other Standard Material: PC (Polycarbonate)
PSS-0256-0236-[]-[]-NL	2-56	6.0 [0.236]	
PSS-0256-0250-[]-[]-NL	2-56	6.4 [0.250]	
PSS-0256-0375-[]-[]-NL	2-56	9.5 [0.375]	
PSS-0256-0500-[]-[]-NL	2-56	12.7 [0.500]	
PSS-0256-0625-[]-[]-NL	2-56	15.9 [0.625]	
PSS-0256-0750-[]-[]-NL	2-56	19.1 [0.750]	
PSS-0256-0875-[]-[]-NL	2-56	22.2 [0.875]	
PSS-0256-1000-[]-[]-NL	2-56	25.4 [1.000]	
PSS-0440-1000-[]-[]-NL	4-40	6.0 [0.236]	Other Standard Material: PC (Polycarbonate)
PSS-0440-0250-[]-[]-NL	4-40	6.4 [0.250]	
PSS-0440-0375-[]-[]-NL	4-40	9.5 [0.375]	
PSS-0440-0472-[]-[]-NL	4-40	12.0 [0.472]	
PSS-0440-0500-[]-[]-NL	4-40	12.7 [0.500]	
PSS-0440-0625-[]-[]-NL	4-40	15.9 [0.625]	
PSS-0440-0750-[]-[]-NL	4-40	19.1 [0.750]	
PSS-0440-0875-[]-[]-NL	4-40	22.2 [0.875]	
PSS-0440-1000-[]-[]-NL	4-40	25.4 [1.000]	
PSS-0632-0250-[]-[]-NL	6-32	6.4 [0.250]	Other Standard Material: PC (Polycarbonate)
PSS-0632-0375-[]-[]-NL	6-32	9.5 [0.375]	
PSS-0632-0500-[]-[]-NL	6-32	12.7 [0.500]	
PSS-0632-0625-[]-[]-NL	6-32	15.9 [0.625]	
PSS-0632-0630-[]-[]-NL	6-32	16.0 [0.630]	
PSS-0632-0750-[]-[]-NL	6-32	19.1 [0.750]	
PSS-0632-0875-[]-[]-NL	6-32	22.2 [0.875]	
PSS-0632-1000-[]-[]-NL	6-32	25.4 [1.000]	
PSS-0632-1250-[]-[]-NL	6-32	31.8 [1.250]	*Special Order Only: NL15 (15% Glass Nylon) NL30 (30% Glass Nylon)
PSS-0632-1500-[]-[]-NL	6-32	38.1 [1.500]	
PSS-0632-1750-[]-[]-NL	6-32	44.5 [1.750]	
PSS-0832-0250-[]-[]-NL	8-32	6.4 [0.250]	
PSS-0832-0375-[]-[]-NL	8-32	9.5 [0.375]	
PSS-0832-0500-[]-[]-NL	8-32	12.7 [0.500]	
PSS-0832-0625-[]-[]-NL	8-32	15.9 [0.625]	
PSS-0832-0750-[]-[]-NL	8-32	19.1 [0.750]	
PSS-0832-0875-[]-[]-NL	8-32	22.2 [0.875]	


table continued on next page...

Standard Screw Head/Driver Styles		
Head Style Code	Head Style	Driver Style
PNP	Pan	Phillips
PNS	Pan	Slotted
FLP	Fillister	Phillips
FLS	Fillister	Slotted
BDP	Binding	Phillips
BDS	Binding	Slotted
HXN	Hex	None
HXS	Hex	Slotted
RDS	Round	Slotted
THS	Thumb	Slotted
SPH	Socket Cap	Hex
SSH	Socket Set	Hex
GBS	Grub	Slotted
FTP	90 Flat	Phillips
FTS	90 Flat	Slotted
OVP	90 Oval	Phillips
OVS	90 Oval	Slotted
PNC	Pan	Combination
FLC	Fillister	Combination
BDC	Binding	Combination

Please contact us for head style availability

Standard Plastic Screws


Nylon/Polycarbonate Screws

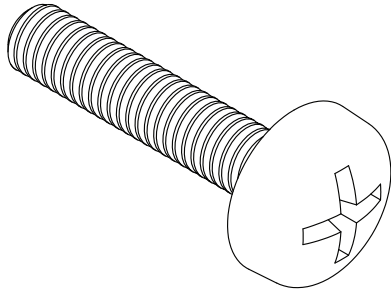

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
Polycarbonate(PC)
UL Rating: 94V-2
Color: Natural (Nylon)
Clear(PC)

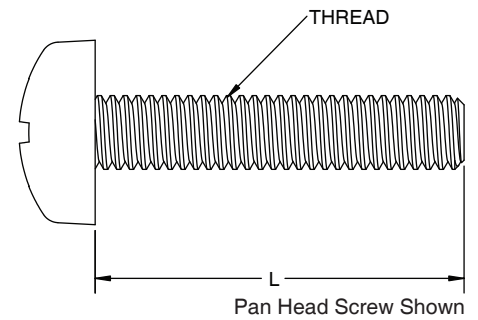

Part Number (Fill [] with Head Style Code)	Thread size	Length, mm [in.]	Additional Material*
PSS-0832-1000-[]-NL	8-32	25.4 [1.000]	Other Standard Material: PC (Polycarbonate) *Special Order Only: NL15 (15% Glass Nylon) NL30 (30% Glass Nylon)
PSS-0832-1250-[]-NL	8-32	31.8 [1.250]	
PSS-0832-1500-[]-NL	8-32	38.1 [1.500]	
PSS-0832-1750-[]-NL	8-32	44.5 [1.750]	
PSS-1024-0500-[]-NL	10-24	12.7 [0.500]	*Special Order Only: NL15 (15% Glass Nylon) NL30 (30% Glass Nylon)
PSS-1024-0625-[]-NL	10-24	15.9 [0.625]	
PSS-1024-0750-[]-NL	10-24	19.1 [0.750]	
PSS-1024-0875-[]-NL	10-24	22.2 [0.875]	
PSS-1024-1000-[]-NL	10-24	25.4 [1.000]	
PSS-1024-1250-[]-NL	10-24	31.8 [1.250]	
PSS-1024-1500-[]-NL	10-24	38.1 [1.500]	
PSS-1024-1750-[]-NL	10-24	44.5 [1.750]	
PSS-1024-2000-[]-NL	10-24	50.8 [2.000]	
PSS-1032-0500-[]-NL	10-32	12.7 [0.500]	
PSS-1032-0625-[]-NL	10-32	15.9 [0.625]	
PSS-1032-0750-[]-NL	10-32	19.1 [0.750]	
PSS-1032-0875-[]-NL	10-32	22.2 [0.875]	
PSS-1032-1000-[]-NL	10-32	25.4 [1.000]	
PSS-1032-1250-[]-NL	10-32	31.8 [1.250]	
PSS-1032-1500-[]-NL	10-32	38.1 [1.500]	
PSS-1032-1750-[]-NL	10-32	44.5 [1.750]	
PSS-1032-2000-[]-NL	10-32	50.8 [2.000]	
PSS-2520-0500-[]-NL	1/4-20	12.7 [0.500]	
PSS-2520-0625-[]-NL	1/4-20	15.9 [0.625]	
PSS-2520-0750-[]-NL	1/4-20	19.1 [0.750]	
PSS-2520-0875-[]-NL	1/4-20	22.2 [0.875]	
PSS-2520-1000-[]-NL	1/4-20	25.4 [1.000]	
PSS-2520-1250-[]-NL	1/4-20	31.8 [1.250]	
PSS-2520-1500-[]-NL	1/4-20	38.1 [1.500]	
PSS-2520-1750-[]-NL	1/4-20	44.5 [1.750]	
PSS-2520-2000-[]-NL	1/4-20	50.8 [2.000]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Metric Plastic Hex Nuts

Nylon/Polycarbonate Hex Nuts




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
Polycarbonate(PC)

UL Rating: 94V-2


Color: Natural (Nylon)
Clear(PC)

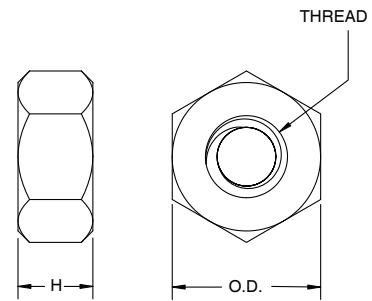

Part Number	Thread Size	"O.D.", mm [in.]	"H", mm [in.]	Additional Material	Standard Package
PSN-M2-NL	M2	4.0 [0.156]	1.4 [0.055]	Other Standard Material: <u>PC</u> (Polycarbonate)	1000
PSN-M2.5-NL	M2.5	5.0 [0.197]	2.4 [0.094]		
PSN-M3-NL	M3	5.6 [0.220]	2.5 [0.098]		
PSN-M4-NL	M4	7.0 [0.276]	3.2 [0.126]		
PSN-M5-NL	M5	8.0 [0.315]	4.0 [0.157]		
PSN-M6-NL	M6	10.0 [0.394]	5.0 [0.197]	*Special Order Only: <u>NL15</u> (15% Glass Nylon) <u>NL30</u> (30% Glass Nylon)	500
PSN-M8-NL	M8	13.0 [0.512]	6.0 [0.236]		
PSN-M10-NL	M10	16.5 [0.650]	7.0 [0.276]		

Standard Plastic Hex Nuts

Nylon/Polycarbonate Hex Nuts




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
Polycarbonate(PC)

UL Rating: 94V-2


Color: Natural (Nylon)
Clear(PC)

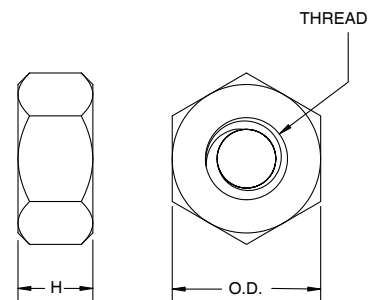

Part Number	Thread Size	"O.D.", mm [in.]	"H", mm [in.]	Additional Material	Standard Package
PSN-0256L-NL	2-56	4.5 [0.177]	1.8 [0.071]	Other Standard Material: <u>PC</u> (Polycarbonate)	1000
PSN-0440L-NL	4-40	6.4 [0.250]	2.5 [0.100]		
PSN-0440H-NL	4-40	6.4 [0.250]	4.6 [0.180]		
PSN-0632L-NL	6-32	7.8 [0.305]	3.1 [0.120]	*Special Order Only: <u>NL15</u> (15% Glass Nylon) <u>NL30</u> (30% Glass Nylon)	
PSN-0632H-NL	6-32	7.8 [0.305]	5.1 [0.200]		
PSN-0832L-NL	8-32	8.5 [0.335]	3.3 [0.130]		
PSN-0832H-NL	8-32	8.5 [0.335]	5.8 [0.230]		


Plastic Wire Saddles

Adhesive Base

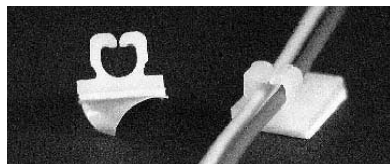

Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Optional Mounting: M2.7 Screw				
PCMAH-CHF-4A	4.0 [0.157]	3.3 [0.130]	11.0 [0.433]	1000




Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
Optional Mounting: M3 Screw						
PCMAH-CHF-8	6.9 [0.272]	6.2 [0.244]	11.0 [0.433]	2.7 [0.106]	11.3 [0.445]	1000
PCMAH-CHF-8A	6.9 [0.272]	6.2 [0.244]	11.0 [0.433]	3.1 [0.122]	11.3 [0.445]	
PCMAH-CHF-8C	7.0 [0.276]	10.0 [0.394]	10.9 [0.429]	2.7 [0.106]	15.1 [0.594]	

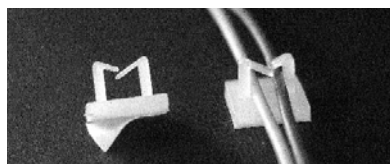


Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMAH-CHF-20C	4.5 [0.177]	3.6 [0.142]	7.0 [0.276]	7.3 [0.287]	9.6 [0.378]	9.6 [0.378]	2000
PCMAH-CHF-20H	4.5 [0.177]	3.6 [0.142]	6.9 [0.272]	7.4 [0.291]	8.0 [0.315]	8.8 [0.346]	

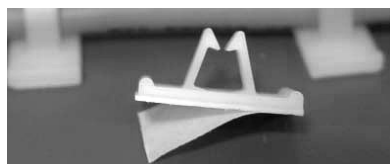

Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-CHF-15A	8.4 [0.331]	6.7 [0.264]	25.5 [1.004]	11.2 [0.441]	12.7 [0.500]	500
PCMAH-CHF-15F	8.4 [0.331]	6.0 [0.236]	17.6 [0.693]	10.5 [0.413]	8.9 [0.350]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Wire Saddles


Adhesive Base

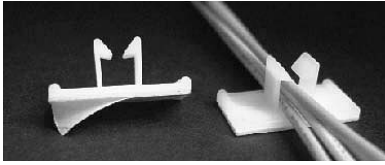


Specifications:

RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

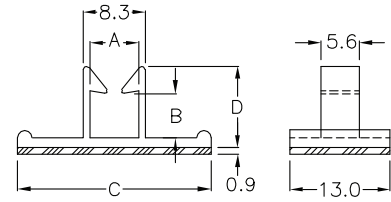


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-CHF-15	6.4 [0.252]	5.8 [0.228]	25.5 [1.004]	10.7 [0.421]	500
PCMAH-CHF-15C	6.4 [0.252]	4.5 [0.177]	19.0 [0.748]	9.5 [0.374]	

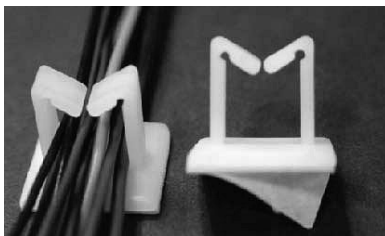

Specifications:

RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

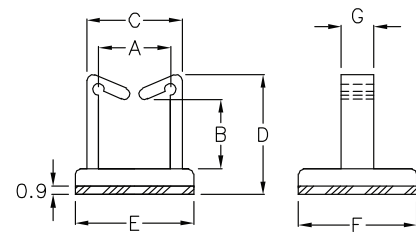


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Standard Package
PCMAH-CHF-20	11.6 [0.457]	10.2 [0.402]	15.6 [0.614]	18.0 [0.709]	21.0 [0.827]	19.0 [0.748]	5.3 [0.209]	500
PCMAH-CHF-20A	11.2 [0.441]	8.1 [0.319]	15.2 [0.598]	16.4 [0.646]	21.0 [0.827]	19.0 [0.748]	5.3 [0.209]	
PCMAH-CHF-20F	11.5 [0.453]	10.0 [0.394]	15.4 [0.606]	18.0 [0.709]	17.0 [0.669]	12.5 [0.492]	5.3 [0.209]	
PCMAH-CHF-20K	16.6 [0.654]	9.8 [0.386]	20.6 [0.811]	18.0 [0.709]	26.4 [1.039]	19.0 [0.748]	7.0 [0.276]	
PCMAH-CHF-20D	20.0 [0.787]	10.0 [0.394]	23.8 [0.937]	18.0 [0.709]	25.7 [1.012]	19.0 [0.748]	5.3 [0.209]	



Specifications:

RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

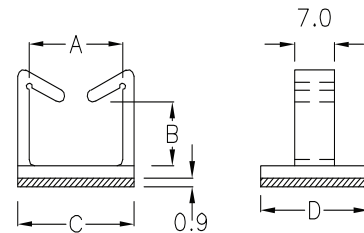


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-CHF-20L	16.5 [0.650]	10.2 [0.402]	20.5 [0.807]	18.9 [0.744]	200



Specifications:

RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

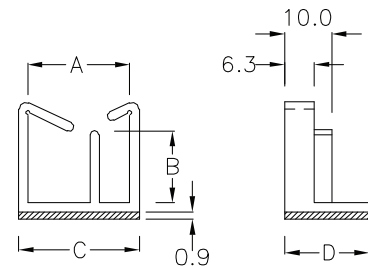

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-CHF-21A	21.7 [0.854]	15.2 [0.598]	25.7 [1.012]	18.0 [0.709]	200


Side Entry Plastic Wire Saddles

Adhesive Base



Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Cable Dia.: ø4.0 mm - ø5.0 mm




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Standard Package
PCMAH-FW-1P	12.0 [0.472]	7.4 [0.291]	19.0 [0.748]	ø4.5 [0.177]	500



Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Cable Dia.: ø4.0 mm - ø5.0 mm




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Standard Package
PCMAH-FW-1	16.0 [0.630]	7.3 [0.287]	18.9 [0.744]	ø4.4 [0.173]	500



Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-1A	19.0 [0.748]	9.0 [0.354]	20.2 [0.795]	ø6.0 [0.236]	10.2 [0.402]	500
PCMAH-FW-1AM	19.0 [0.748]	8.9 [0.350]	19.0 [0.748]	ø5.2 [0.205]	10.2 [0.402]	



Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-1AK	16.0 [0.630]	7.4 [0.291]	19.0 [0.748]	ø4.0 [0.157]	10.2 [0.402]	500
PCMAH-FW-1AP	16.0 [0.630]	6.6 [0.260]	16.0 [0.630]	ø3.0 [0.118]	8.5 [0.335]	
PCMAH-FW-1AQ	16.0 [0.630]	7.5 [0.295]	19.0 [0.748]	ø4.0 [0.157]	10.2 [0.402]	
PCMAH-FW-1AR	16.0 [0.630]	7.5 [0.295]	19.0 [0.748]	ø3.6 [0.142]	10.2 [0.402]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com



Vaisis

Side Entry Plastic Wire Saddles

Adhesive Base

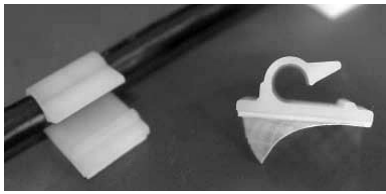**Specifications:****RoHS COMPLIANT**



Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Standard Package
PCMAH-FW-1B	20.7 [0.815]	9.1 [0.358]	13.0 [0.512]	ø5.6 [0.220]	500
PCMAH-FW-1C	20.7 [0.815]	7.6 [0.299]	10.0 [0.394]	ø3.6 [0.142]	

**Specifications:****RoHS COMPLIANT**



Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
 Generic Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Standard Package
PCMAH-FW-2F	20.8 [0.819]	8.7 [0.343]	13.0 [0.512]	ø4.7 [0.185]	500

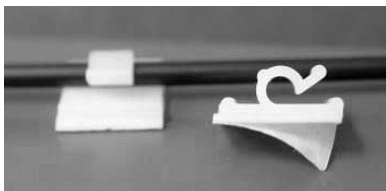**Specifications:****RoHS COMPLIANT**



Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Standard Package
PCMAH-FW-1H	13.2 [0.520]	5.2 [0.205]	12.0 [0.472]	ø3.3 [0.130]	1000

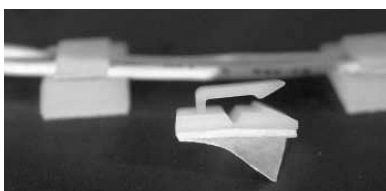**Specifications:****RoHS COMPLIANT**


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

Flexible to Fit Contoured Surface

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
PCMAH-FW-1F	12.0 [0.472]	4.7 [0.185]	10.0 [0.394]	1000



Side Entry Plastic Wire Saddles

Adhesive Base

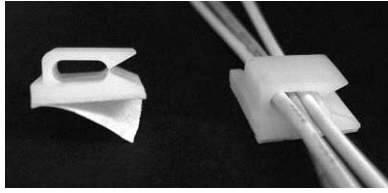


Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape





Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-FW-2	16.0 [0.630]	7.3 [0.287]	19.0 [0.748]	8.3 [0.327]	500
PCMAH-FW-2P	14.0 [0.551]	7.3 [0.287]	16.0 [0.630]	6.3 [0.248]	
PCMAH-FW-2Q	18.0 [0.709]	7.3 [0.287]	19.0 [0.748]	10.2 [0.402]	

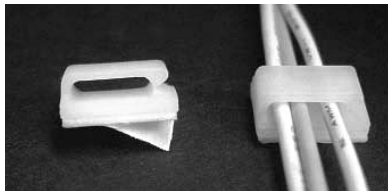


Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape





Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-2M	14.5 [0.571]	6.5 [0.256]	9.5 [0.374]	10.3 [0.406]	2.5 [0.098]	500
PCMAH-FW-2MA	16.7 [0.657]	6.7 [0.264]	13.0 [0.512]	11.6 [0.457]	3.1 [0.122]	
PCMAH-FW-2MP	12.0 [0.472]	6.4 [0.252]	9.5 [0.374]	6.3 [0.248]	2.5 [0.098]	
PCMAH-FW-2MQ	10.0 [0.394]	6.0 [0.236]	9.5 [0.374]	4.3 [0.169]	2.5 [0.098]	
PCMAH-FW-2S	12.5 [0.492]	6.1 [0.240]	9.5 [0.374]	8.4 [0.331]	2.5 [0.098]	
PCMAH-FW-2SP	12.7 [0.500]	6.4 [0.252]	12.5 [0.492]	8.2 [0.323]	2.5 [0.098]	

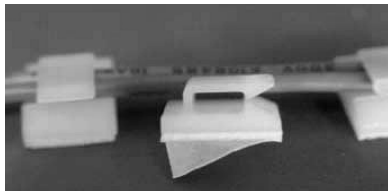

Specifications: RoHS COMPLIANT

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
 Generic Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Pkg.
PCMAH-FW-19	20.0 [0.787]	6.8 [0.268]	14.0 [0.551]	3.2 [0.126]	13.2 [0.520]	10.0 [0.394]	500
PCMAH-FW-19A	19.9 [0.783]	6.2 [0.244]	11.9 [0.469]	2.6 [0.102]	13.2 [0.520]	10.0 [0.394]	
PCMAH-FW-2N	9.8 [0.386]	4.6 [0.181]	9.5 [0.374]	1.4 [0.055]	6.5 [0.256]	6.4 [0.252]	1000
PCMAH-FW-1M	12.3 [0.484]	6.6 [0.260]	15.9 [0.626]	3.2 [0.126]	5.8 [0.228]	7.0 [0.276]	
PCMAH-FW-1Q	11.7 [0.461]	5.3 [0.209]	10.0 [0.394]	2.0 [0.079]	5.2 [0.205]	6.0 [0.236]	
PCMAH-FW-1S	11.7 [0.461]	5.9 [0.232]	15.9 [0.626]	2.5 [0.098]	5.2 [0.205]	7.0 [0.276]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Side Entry Plastic Wire Saddles


Adhesive Base

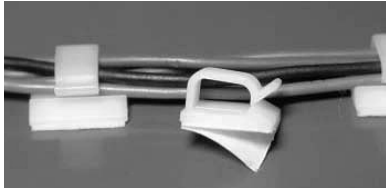


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
 Generic Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-1D	13.4 [0.528]	8.2 [0.323]	16.0 [0.630]	4.7 [0.185]	8.0 [0.315]	500
PCMAH-FW-1DS	11.4 [0.449]	8.2 [0.323]	16.0 [0.630]	4.7 [0.185]	6.0 [0.236]	
PCMAH-FW-1DL	15.4 [0.606]	8.2 [0.323]	16.0 [0.630]	4.7 [0.185]	10.0 [0.394]	
PCMAH-FW-3D	14.4 [0.567]	8.4 [0.331]	16.0 [0.630]	4.8 [0.189]	9.0 [0.354]	
PCMAH-FW-4D	14.4 [0.567]	8.8 [0.346]	16.0 [0.630]	5.2 [0.205]	8.2 [0.323]	
PCMAH-FW-5D	16.9 [0.665]	10.3 [0.406]	16.0 [0.630]	6.7 [0.264]	10.2 [0.402]	

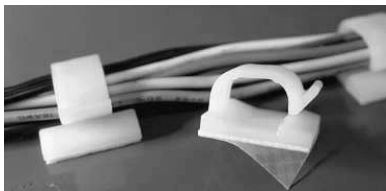

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
 Generic Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-2D	19.0 [0.748]	11.7 [0.461]	19.0 [0.748]	7.9 [0.311]	11.8 [0.465]	500
PCMAH-FW-2DM	16.0 [0.630]	9.6 [0.378]	19.0 [0.748]	6.0 [0.236]	9.0 [0.354]	
PCMAH-FW-2DP	19.0 [0.748]	12.3 [0.484]	19.0 [0.748]	7.9 [0.311]	11.7 [0.461]	
PCMAH-FW-2DS	14.9 [0.587]	9.6 [0.378]	19.0 [0.748]	6.0 [0.236]	7.9 [0.311]	
PCMAH-FW-6D	20.9 [0.823]	12.3 [0.484]	19.0 [0.748]	8.3 [0.327]	13.7 [0.539]	



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-2L	16.2 [0.638]	10.2 [0.402]	16.0 [0.630]	6.0 [0.236]	11.8 [0.465]	500
PCMAH-FW-2LP	14.2 [0.559]	10.0 [0.394]	16.0 [0.630]	6.0 [0.236]	7.5 [0.295]	
PCMAH-FW-2LQ	16.2 [0.638]	10.0 [0.394]	16.0 [0.630]	6.0 [0.236]	9.5 [0.374]	
PCMAH-FW-2K	14.0 [0.551]	7.3 [0.287]	12.1 [0.476]	3.6 [0.142]	10.2 [0.402]	
PCMAH-FW-2KP	12.0 [0.472]	7.2 [0.283]	12.1 [0.476]	3.6 [0.142]	6.2 [0.244]	
PCMAH-FW-2KQ	13.0 [0.512]	7.2 [0.283]	12.1 [0.476]	3.6 [0.142]	8.2 [0.323]	

Side Entry Plastic Wire Saddles


Adhesive Base




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-2DA	25.4 [1.000]	12.2 [0.480]	15.6 [0.614]	7.9 [0.311]	11.7 [0.461]	500
PCMAH-FW-2DC	25.4 [1.000]	15.5 [0.610]	15.9 [0.626]	11.1 [0.437]	11.7 [0.461]	
PCMAH-FW-2DL	25.4 [1.000]	12.2 [0.480]	25.4 [1.000]	7.9 [0.311]	11.8 [0.465]	

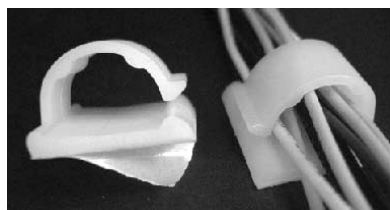

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-2DK	25.7 [1.012]	16.4 [0.646]	25.4 [1.000]	11.8 [0.465]	18.4 [0.724]	200
PCMAH-FW-2DJ	40.0 [1.575]	26.3 [1.035]	40.0 [1.575]	20.2 [0.795]	28.8 [1.134]	50



RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
 Generic Form Tape



Flexible to Fit Contoured Surface


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-1CH	18.2 [0.717]	13.3 [0.524]	19.0 [0.748]	ø5.0 [0.197]	8.5 [0.335]	500
PCMAH-FW-2CH	18.2 [0.717]	15.4 [0.606]	19.0 [0.748]	ø7.8 [0.307]	10.0 [0.394]	
PCMAH-FW-3CH	18.2 [0.717]	13.3 [0.524]	19.0 [0.748]	ø6.7 [0.264]	8.5 [0.335]	
PCMAH-FW-4CH	23.0 [0.906]	15.4 [0.606]	15.0 [0.591]	ø7.8 [0.307]	10.0 [0.394]	

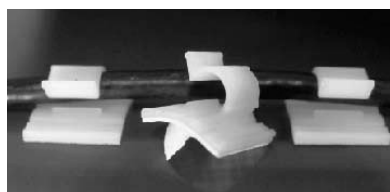

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
 Generic Form Tape



Flexible to Fit Contoured Surface

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Standard Package
PCMAH-FW-2C	18.2 [0.717]	11.0 [0.433]	19.0 [0.748]	ø7.8 [0.307]	500

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Side Entry Plastic Wire Saddles


Adhesive Base




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Standard Package
PCMAH-FW-2DQ	25.1 [0.988]	11.7 [0.461]	25.1 [0.988]	ø9.1 [0.358]	500

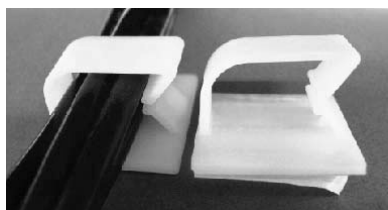

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-6F	38.0 [1.496]	22.9 [0.902]	37.2 [1.465]	18.0 [0.709]	28.6 [1.126]	100



RoHS COMPLIANT

Specifications:

Material: PVC
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
 Generic Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
PCMAH-FW-7	19.2 [0.756]	10.6 [0.417]	20.0 [0.787]	500
PCMAH-FW-7S	19.2 [0.756]	10.6 [0.417]	15.0 [0.591]	



RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
 Generic Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
PCMAH-FW-11	15.5 [0.610]	7.7 [0.303]	500

Side Entry Plastic Wire Saddles


Adhesive Base

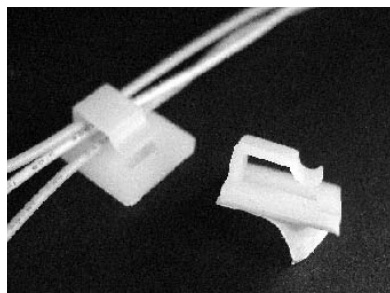

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-FDW-1	16.0 [0.630]	7.4 [0.291]	16.0 [0.630]	16.0 [0.630]	500

Side Entry Plastic Wire Saddles


Adhesive Base, Optional Screw Mount

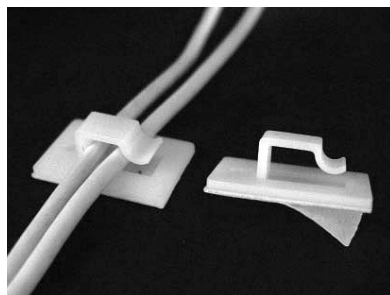


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Screw Mount: M3 (Optional)




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-FDW-3	27.0 [1.063]	9.6 [0.378]	17.0 [1.063]	27.0 [1.063]	500

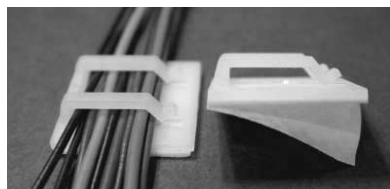

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Screw Mount: M4 (Optional)



Part Number	Ref. "A", mm[in.]	Ref. "C", mm[in.]	Ref. "D", mm[in.]	Ref. "E", mm[in.]	Mounting Hold Dia. "F", ø, mm [in.]	Pkg.
PCMAH-FSC-01	25.7 [1.012]	25.4 [1.000]	3.3 [0.130]	16.0 [0.630]	ø4.7 [0.185]	500
PCMAH-FSC-02	25.4 [1.000]	25.4 [1.000]	3.0 [0.118]	15.8 [0.622]	ø5.0 [0.197]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Side Entry Plastic Wire Saddles


Adhesive Base

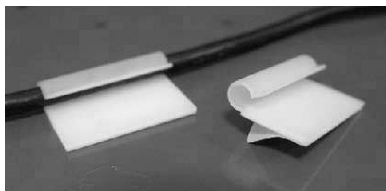


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Cable Dia. "D", ø, mm [in.]	Standard Package
PCMAH-FWG-38	24.7 [0.972]	37.5 [1.476]	ø5.8 [0.228]	100

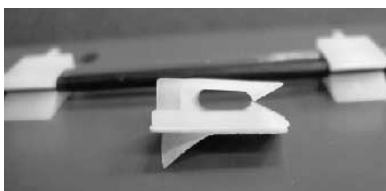


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

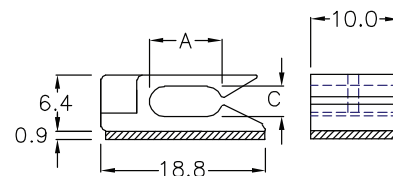


Part Number	Ref. "A", mm [in.]	Ref. "C", mm [in.]	Standard Package
PCMAH-CU-01A	8.2 [0.323]	3.3 [0.130]	1000

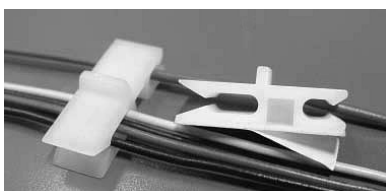

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-CU-01D	8.6 [0.339]	3.3 [0.130]	4.9 [0.193]	3.3 [0.130]	1000


Plastic Locking Quick Clips Adhesive Base

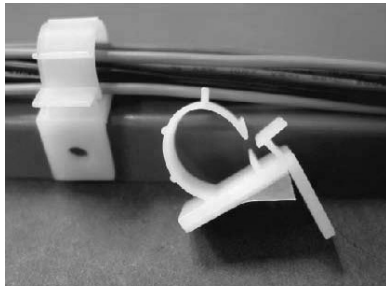


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Screw Mount: M4 (Optional)

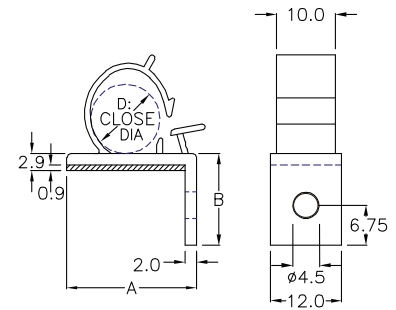


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Close/Bundle Dia. "D", ø, mm [in.]	Standard Package
PCMAH-LFW-3	22.0 [0.866]	15.5 [0.610]	ø11.7 [0.461]	200

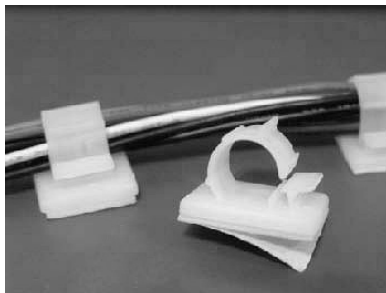

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close/Bundle Dia. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMAH-FW-4S	22.0 [0.866]	18.6 [0.732]	16.0 [0.630]	11.7 [0.461]	10.0 [0.394]	200
PCMAH-FW-3	25.0 [0.984]	16.7 [0.657]	19.6 [0.772]	9.0 [0.354]	12.0 [0.472]	
PCMAH-FW-3A	19.0 [0.748]	13.6 [0.535]	19.0 [0.748]	6.8 [0.268]	9.0 [0.354]	
PCMAH-FW-3S	21.0 [0.827]	13.1 [0.516]	19.0 [0.748]	7.8 [0.307]	9.0 [0.354]	
PCMAH-FW-3L	21.6 [0.850]	15.8 [0.622]	16.8 [0.661]	10.4 [0.409]	12.0 [0.472]	
PCMAH-FW-4	29.8 [1.173]	27.2 [1.071]	19.8 [0.780]	12.6 [0.496]	14.7 [0.579]	100
PCMAH-FW-4L	33.5 [1.319]	31.0 [1.220]	24.8 [0.976]	19.0 [0.748]	16.2 [0.638]	

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Locking Quick Clips


Adhesive Base




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

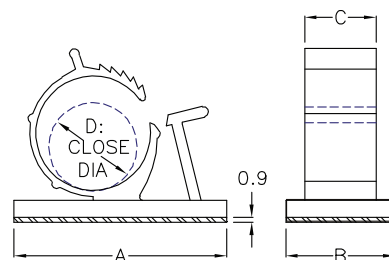


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close/Bundle Dia. "D", ø, mm [in.]	Standard Package
PCMAH-FW-33	30.0 [1.181]	16.0 [0.630]	12.0 [0.472]	ø10.5-14.5 [0.413-0.571]	200
PCMAH-FW-33A	25.5 [1.004]	16.0 [0.630]	12.0 [0.472]	ø10.5-14.5 [0.413-0.571]	
PCMAH-FW-35	35.0 [1.378]	20.0 [0.787]	12.9 [0.508]	ø14.5-18.5 [0.571-0.728]	
PCMAH-FW-39	39.0 [1.535]	20.0 [0.787]	12.9 [0.508]	ø18.5-22.5 [0.728-0.886]	100

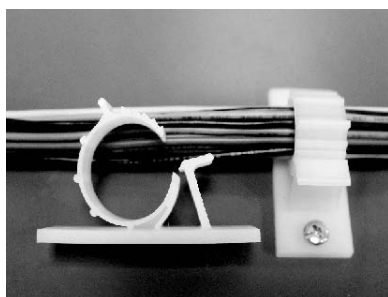


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Screw Mount: M3 (Optional)

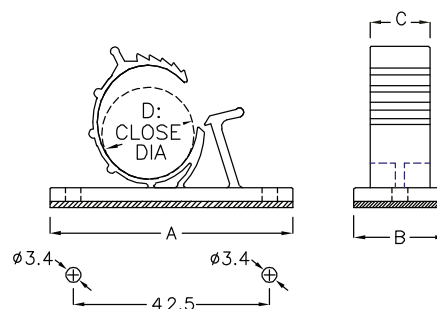


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close/Bundle Dia. "D", ø, mm [in.]	Standard Package
PCMAH-FWP-33	52.5 [2.067]	20.0 [0.787]	13.0 [0.512]	ø10.5-13.5 [0.413-0.531]	200
PCMAH-FWP-52	52.5 [2.067]	20.0 [0.787]	13.0 [0.512]	ø14.5-17.5 [0.571-0.689]	

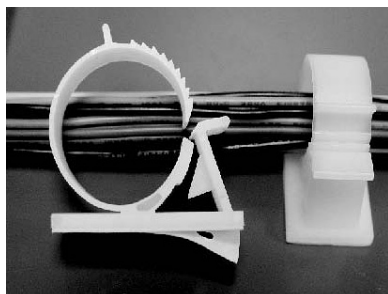

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Screw Mount: M3 Self-Tapping (Optional)

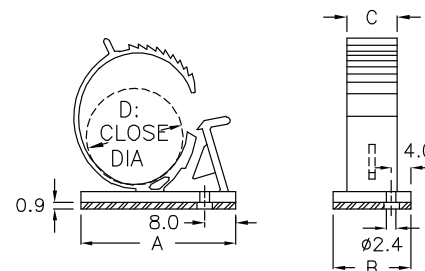

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close/Bundle Dia. "D", ø, mm [in.]	Standard Package
PCMAH-FWP-40	39.9 [1.571]	19.9 [0.783]	12.9 [0.508]	ø22.5-26.5 [0.886-1.043]	200

Plastic Twist Locks

Adhesive Base

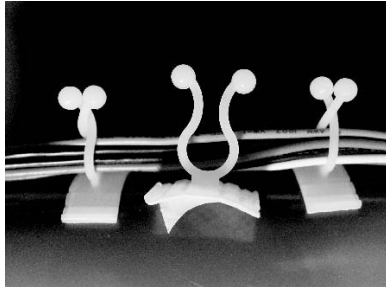


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

Flexible to Fit Contoured Surface

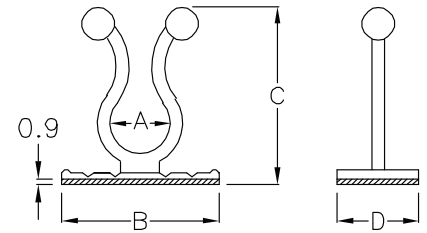


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Close/Bundle Dia., ø, mm [in.]	Standard Package
PCMAH-TLAB-08C	9.5 [0.374]	25.0 [0.984]	28.4 [1.118]	13.0 [0.512]	ø8.2 [0.323]	500

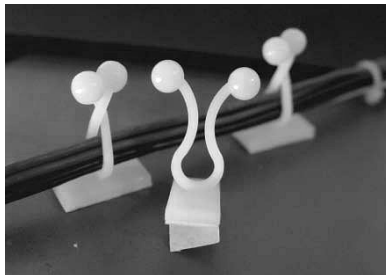


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

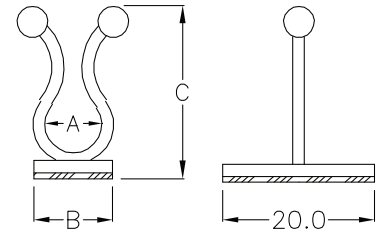


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close/Bundle Dia., ø, mm [in.]	Standard Package
PCMAH-TLAB-04	6.7 [0.264]	10.0 [0.394]	28.4 [1.118]	ø5.8 [0.228]	500

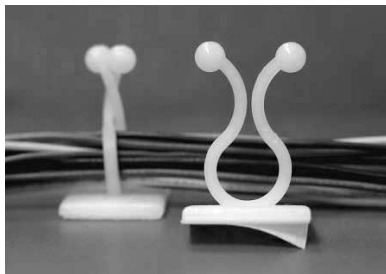

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

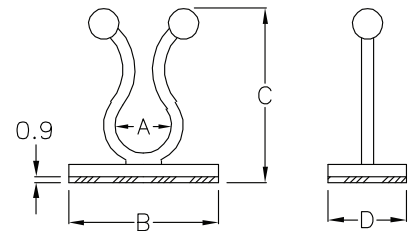

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Close/Bundle Dia., ø, mm [in.]	Standard Package
PCMAH-TLAB-04C	4.9 [0.193]	20.0 [0.787]	25.3 [0.996]	13.0 [0.512]	ø4.0 [0.157]	500
PCMAH-TLAB-04D	4.9 [0.193]	14.5 [0.571]	21.2 [0.835]	15.5 [0.610]	ø4.0 [0.157]	
PCMAH-TLAB-05C	6.0 [0.236]	20.0 [0.787]	24.8 [0.976]	13.0 [0.512]	ø5.0 [0.197]	
PCMAH-TLAB-07	8.7 [0.343]	20.0 [0.787]	22.8 [0.898]	13.0 [0.512]	ø7.0 [0.276]	
PCMAH-TLAB-07C	8.7 [0.343]	15.5 [0.610]	23.1 [0.909]	16.0 [0.630]	ø7.0 [0.276]	
PCMAH-TLAB-08	9.5 [0.374]	24.8 [0.976]	28.0 [1.102]	13.0 [0.512]	ø8.2 [0.323]	
PCMAH-TLAB-08D	9.5 [0.374]	15.5 [0.610]	25.5 [1.004]	20.0 [0.787]	ø8.2 [0.323]	200
PCMAH-TLAB-10	10.8 [0.425]	21.0 [0.827]	31.2 [1.228]	19.0 [0.748]	ø10.0 [0.394]	
PCMAH-TLAB-10D	10.8 [0.425]	18.5 [0.728]	27.4 [1.079]	21.0 [0.827]	ø10.0 [0.394]	
PCMAH-TLAB-12A	14.0 [0.551]	22.0 [0.866]	35.5 [1.398]	13.0 [0.512]	ø12.5 [0.492]	
PCMAH-TLAB-13	14.8 [0.583]	22.0 [0.866]	35.6 [1.402]	13.0 [0.512]	ø13.0 [0.512]	
PCMAH-TLAB-13A	14.8 [0.583]	25.0 [0.984]	35.6 [1.402]	20.0 [0.787]	ø13.3 [0.524]	
PCMAH-TLAB-16	17.8 [0.701]	25.0 [0.984]	39.4 [1.551]	13.0 [0.512]	ø16.2 [0.638]	
PCMAH-TLAB-16C	17.9 [0.705]	25.0 [0.984]	39.4 [1.551]	18.0 [0.709]	ø16.0 [0.630]	
PCMAH-TLAB-22	21.0 [0.827]	25.5 [1.004]	40.7 [1.602]	13.0 [0.512]	ø19.0 [0.748]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Twist Locks


Adhesive Base, Rounded Edges

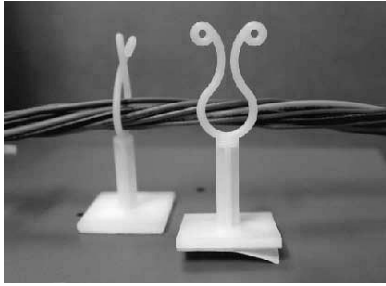

RoHS COMPLIANT

Specifications:


Material:	Nylon 6/6
UL Rating:	94V-2
Color:	Natural
Adhesive:	3M™ Form Tape

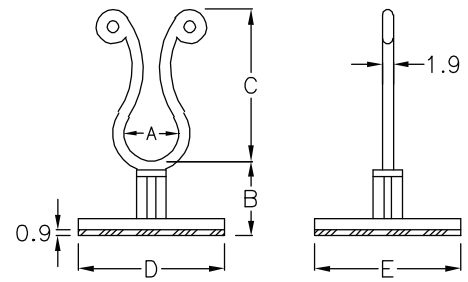

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Close/Bundle Dia., ø, mm [in.]	Standard Package
PCMAH-TLAB-08S	9.5 [0.374]	6.4 [0.250]	26.3 [1.035]	25.4 [1.000]	25.4 [1.000]	ø8.5 [0.335]	200
PCMAH-TLAB-08H	9.5 [0.374]	12.7 [0.500]	26.3 [1.035]	25.4 [1.000]	25.4 [1.000]	ø8.5 [0.335]	
PCMAH-TLAB-10A	11.6 [0.457]	27.4 [1.079]	28.0 [1.102]	25.4 [1.000]	25.4 [1.000]	ø10.2 [0.402]	
PCMAH-TLAB-11A	11.4 [0.449]	4.9 [0.193]	27.4 [1.079]	25.4 [1.000]	13.0 [0.512]	ø9.7 [0.382]	

Plastic Adjustable Cable Clamp


Adhesive Base

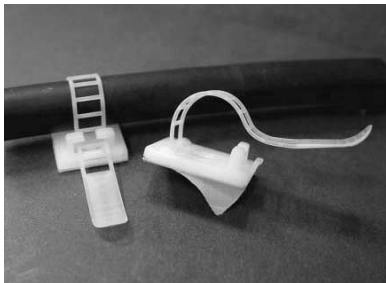

RoHS COMPLIANT

Specifications:

Material:	Nylon 6/6
UL Rating:	94V-2
Color:	Natural
Adhesive:	3M™ Form Tape
Screw Mount:	M3 Flat Head (Optional)

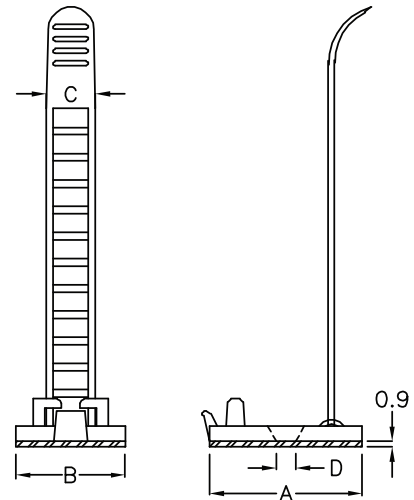

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Screw Hole Dia. "D", ø, mm [in.]	Max. Bundle Dia. ø, mm [in.]	Standard Package
PCMAH-FWA-13	25.0 [0.984]	18.0 [0.709]	7.9 [0.311]	ø3.5 [0.138]	ø13.0 [0.512]	200
PCMAH-FWA-17	25.0 [0.984]	18.0 [0.709]	7.9 [0.311]	ø3.5 [0.138]	ø17.0 [0.669]	
PCMAH-FWA-21	25.0 [0.984]	18.0 [0.709]	8.1 [0.319]	ø3.5 [0.138]	ø18.5 [0.728]	
PCMAH-FWA-22	30.5 [1.201]	21.0 [0.827]	12.0 [0.472]	ø3.5 [0.138]	ø22.0 [0.866]	100
PCMAH-FWA-22C	31.8 [1.252]	21.0 [0.827]	12.0 [0.472]	ø3.5 [0.138]	ø22.0 [0.866]	
PCMAH-FWA-26	30.5 [1.201]	21.0 [0.827]	12.0 [0.472]	ø3.5 [0.138]	ø26.0 [1.024]	

Plastic Flat Wire Mount
Adhesive Base



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black
Adhesive: 3M™ Form Tape

Fig 1






Fig 2



Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMAH-FWF-1A	1	14.0 [0.551]	12.0 [0.472]	3.6 [0.142]	5.1 [0.201]	3.8 [0.150]	2.7 [0.106]	1000
PCMAH-FWF-1C		24.0 [0.945]	12.0 [0.472]	3.7 [0.146]	9.6 [0.378]	4.8 [0.189]	2.7 [0.106]	500
PCMAH-FWF-1D		20.0 [0.787]	12.0 [0.472]	3.7 [0.146]	7.6 [0.299]	4.8 [0.189]	2.7 [0.106]	
PCMAH-FWF-1M		24.0 [0.945]	12.0 [0.472]	3.9 [0.154]	9.4 [0.370]	5.2 [0.205]	2.9 [0.114]	
PCMAH-FWF-1F	2	24.0 [0.945]	12.0 [0.472]	N/A	9.6 [0.378]	4.8 [0.189]	2.7 [0.106]	500
PCMAH-FWF-1N		24.0 [0.945]	12.0 [0.472]	N/A	9.6 [0.378]	4.8 [0.189]	3.2 [0.126]	
PCMAH-FWF-1P		24.0 [0.945]	12.0 [0.472]	N/A	9.4 [0.370]	5.2 [0.205]	3.2 [0.126]	

all dimension units in millimeter (mm) unless noted otherwise


Plastic Locking Wire Clamp
Adhesive Base

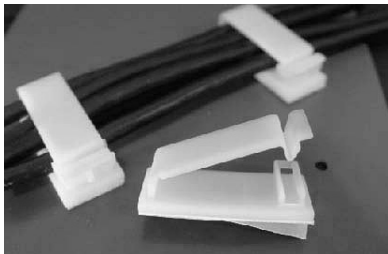


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

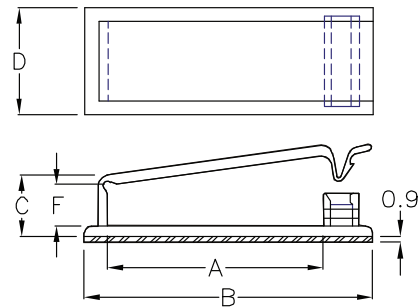


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMAH-FCW-29	31.6 [1.244]	45.5 [1.791]	10.1 [0.398]	19.0 [0.748]	5.5 [0.217]	100
PCMAH-FCW-30	32.0 [1.260]	45.7 [1.799]	11.4 [0.449]	19.2 [0.756]	7.0 [0.276]	
PCMAH-FCW-40	39.7 [1.563]	53.5 [2.106]	11.4 [0.449]	19.2 [0.756]	7.0 [0.276]	
PCMAH-FCW-40K	39.7 [1.563]	53.5 [2.106]	14.5 [0.571]	19.3 [0.760]	9.5 [0.374]	
PCMAH-FCW-41	41.3 [1.626]	55.2 [2.173]	9.6 [0.378]	18.7 [0.736]	5.0 [0.197]	
PCMAH-FCW-50	64.0 [2.520]	77.5 [3.051]	11.4 [0.449]	19.2 [0.756]	6.5 [0.256]	
PCMAH-FCW-50H	64.6 [2.543]	78.5 [3.091]	17.6 [0.693]	19.0 [0.748]	13.0 [0.512]	

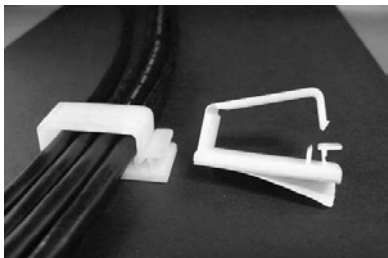

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-FWT-25	31.6 [1.244]	45.0 [1.772]	18.0 [0.709]	19.0 [0.748]	100
PCMAH-FWT-25A	33.0 [1.299]	44.4 [1.748]	10.4 [0.409]	19.0 [0.748]	

Plastic Flat Cable Clamps


Adhesive Base

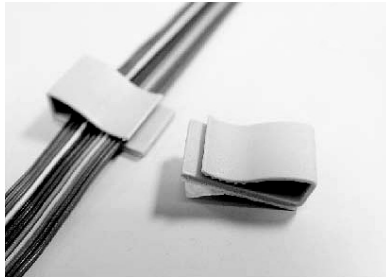


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Gray
Adhesive: 3M™ Form Tape

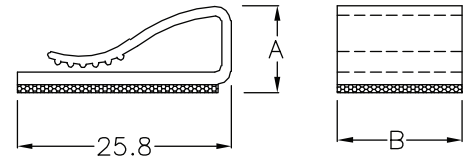


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
PCMAH-FB-15A	10.4 [0.409]	15.0 [0.591]	1000

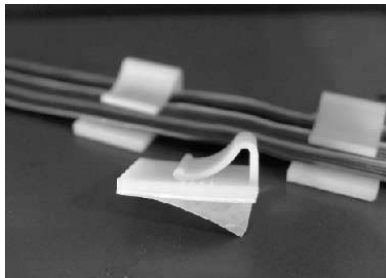


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

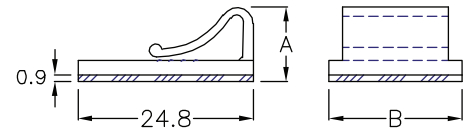


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
PCMAH-FC-10N	10.5 [0.413]	18.8 [0.740]	500

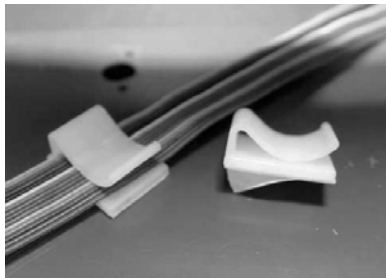

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

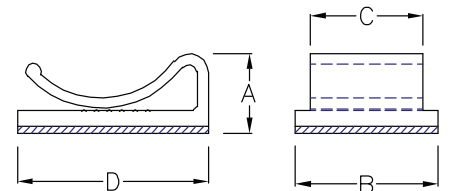


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMAH-FC-15N	10.6 [0.417]	19.0 [0.748]	15.0 [0.591]	25.0 [0.984]	200
PCMAH-FC-25N	10.4 [0.409]	25.0 [0.984]	23.0 [0.906]	25.2 [0.992]	



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
PCMAH-FC-25A	9.7 [0.382]	25.4 [1.000]	500

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Flat Cable Clamps
Adhesive Base

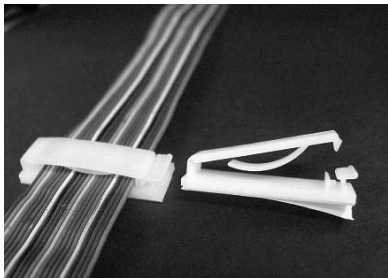


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

Fig. 1

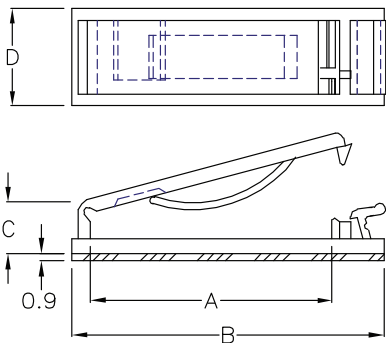

Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Suitable Flat Cable	Standard Package
PCMAH-FCD-25	1	31.5 [1.240]	40.7 [1.602]	6.8 [0.268]	12.7 [0.500]	25 PIN	100
PCMAH-FCD-40		52.0 [2.047]	61.2 [2.409]	6.9 [0.272]	12.7 [0.500]	40 PIN	
PCMAH-FCD-25A		31.1 [1.224]	40.4 [1.591]	7.1 [0.280]	12.7 [0.500]	25 PIN	
PCMAH-FCD-27	2	27.0 [1.063]	36.0 [1.417]	10.0 [0.394]	12.7 [0.500]	20 PIN	
PCMAH-FCD-40H		52.0 [2.047]	61.2 [2.409]	6.8 [0.268]	12.7 [0.500]	40 PIN	
PCMAH-FCD-60A	3	62.8 [2.472]	72.2 [2.843]	7.1 [0.280]	12.9 [0.508]	45 PIN	
PCMAH-FCD-60H	4	62.8 [2.472]	72.2 [2.843]	7.1 [0.280]	12.9 [0.508]	45 PIN	

Fig. 2




Fig. 3






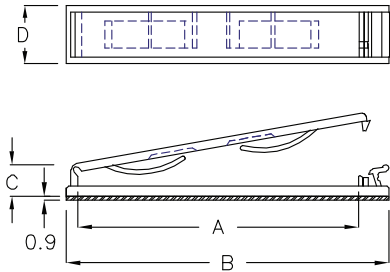


Fig. 4

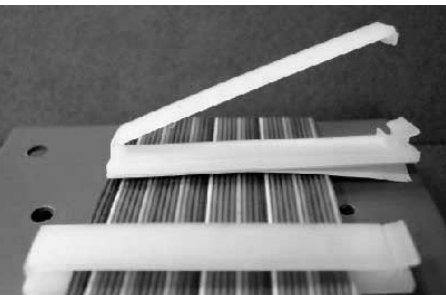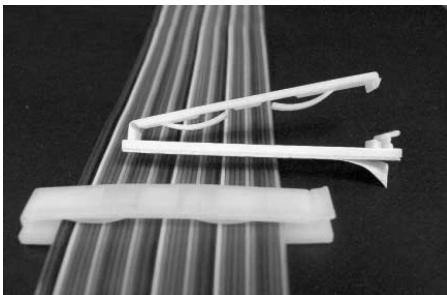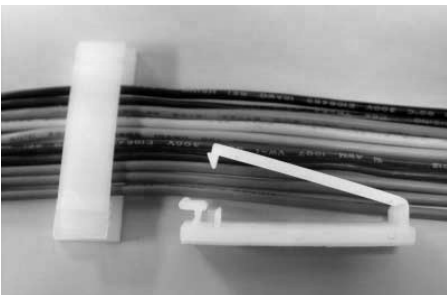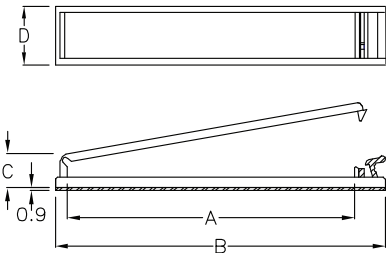


Plastic Flat Cable Clamps with Tension Adhesive Base

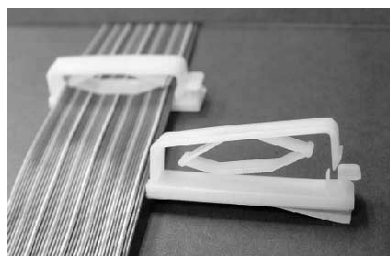


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape

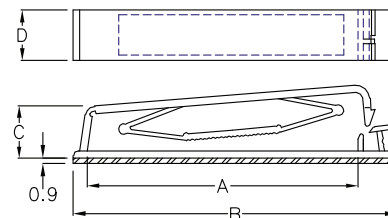


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Suitable Cable	Standard Package
PCMAH-FCC-25C	31.8 [1.252]	45.0 [1.772]	15.2 [0.598]	19.0 [0.748]	25 PIN	100
PCMAH-FCC-25K	31.3 [1.232]	40.7 [1.602]	6.4 [0.252]	10.0 [0.394]	25 PIN	
PCMAH-FCC-30	32.0 [1.260]	44.8 [1.764]	15.8 [0.622]	18.5 [0.728]	30 PIN	
PCMAH-FCC-40	54.0 [2.126]	67.0 [2.638]	15.8 [0.622]	15.8 [0.622]	40 PIN	
PCMAH-FCC-40C	53.8 [2.118]	66.0 [2.598]	12.0 [0.472]	10.2 [0.402]	40 PIN	
PCMAH-FCC-41	54.0 [2.126]	67.0 [2.638]	15.8 [0.622]	15.8 [0.622]	40 PIN	
PCMAH-FCC-41A	53.7 [2.114]	66.7 [2.626]	16.1 [0.634]	12.8 [0.504]	40 PIN	
PCMAH-FCC-50	65.2 [2.567]	78.3 [3.083]	15.8 [0.622]	18.8 [0.740]	50 PIN	
PCMAH-FCC-50D	64.3 [2.531]	77.0 [3.031]	11.3 [0.445]	10.0 [0.394]	50 PIN	
PCMAH-FCC-50F	63.7 [2.508]	76.2 [3.000]	15.1 [0.594]	19.0 [0.748]	50 PIN	
PCMAH-FCC-64	83.5 [3.287]	97.5 [3.839]	15.8 [0.622]	16.0 [0.630]	64 PIN	

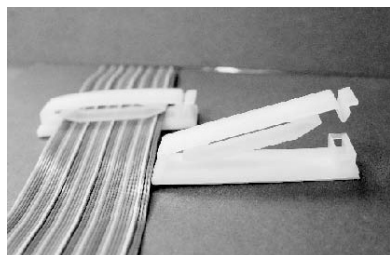


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Suitable Cable	Standard Package
PCMAH-FWY-50	64.0 [2.520]	77.0 [3.031]	11.8 [0.465]	20.0 [0.787]	50 PIN	100

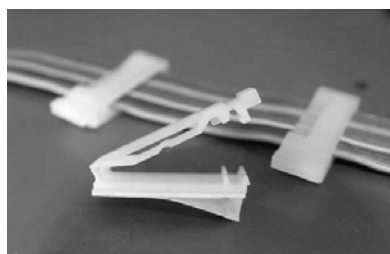

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Suitable Cable	Pkg.
PCMAH-FCM-25S	22.0 [0.866]	28.0 [1.102]	3.0 [0.118]	4.7 [0.185]	10.0 [0.394]	15 PIN	200
PCMAH-FCM-25	29.3 [1.154]	36.5 [1.437]	3.0 [0.118]	4.7 [0.185]	10.0 [0.394]	20 PIN	
PCMAH-FCM-25M	55.8 [2.197]	61.2 [2.409]	4.0 [0.157]	4.7 [0.185]	15.0 [0.591]	40 PIN	100


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Flat Cable Clamp


Adhesive Base

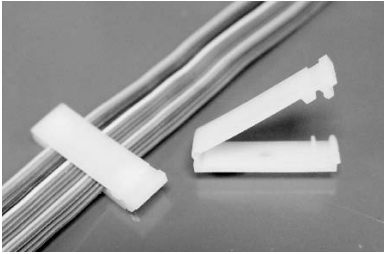

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Suitable Cable	Standard Package
PCMAH-FCM-25H	24.8 [0.976]	31.0 [1.220]	3.6 [0.142]	16 PIN	200

Plastic Flat Cable Routing Clamps



Adhesive Base

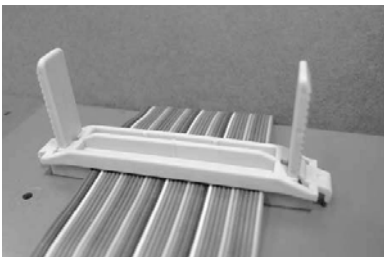


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Screw Mount: M4 (Optional)

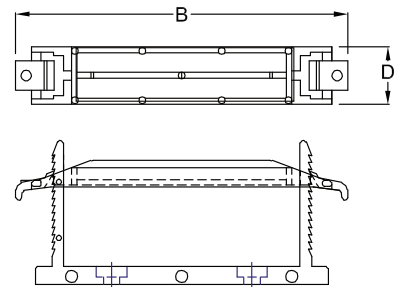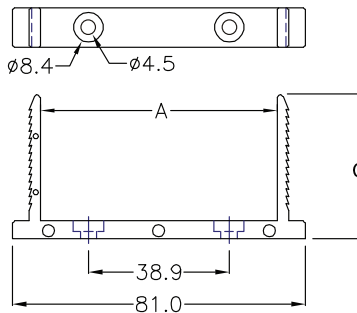


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Suitable Cable	Standard Package
PCMAH-FCF-50	65.4 [2.575]	91.8 [3.614]	40.3 [1.587]	16.0 [0.630]	50 PIN x30	100

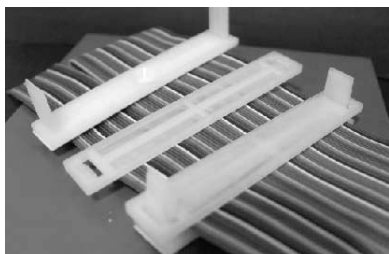

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Adhesive: 3M™ Form Tape
Screw Mount: M5 Flat Head (Optional)

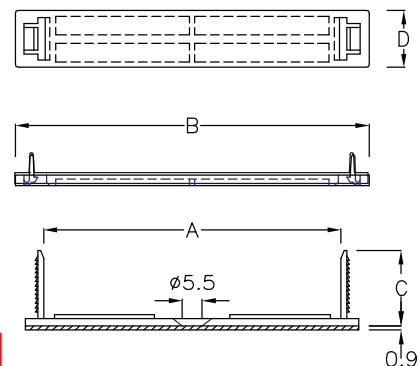

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Suitable Cable	Standard Package
PCMAH-FCF-64	83.0 [3.268]	99.2 [3.906]	22.0 [0.866]	15.9 [0.626]	64 PIN x12	100

Plastic Wire Saddles


Snap in Arrowhead Mount

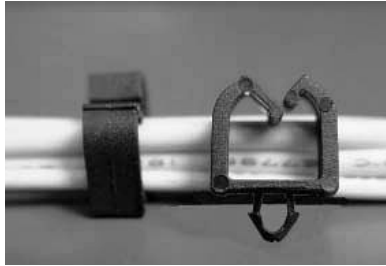


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "D", mm [in.]	Max. Panel Thickness, mm [in.]	Standard Package
Mounting Hole Dia. in chassis = Ø3.0 mm [0.118 in.]					
PCMSP-CH-01A	6.7 [0.264]	9.0 [0.354]	5.5 [0.217]	1.2 [0.047]	2000
PCMSP-CH-01J	6.7 [0.264]	9.0 [0.354]	5.0 [0.197]	1.6 [0.063]	

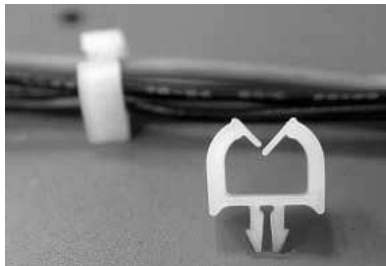


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
UL Listed: See  Logo




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = Ø3.0 mm [0.118 in.] Chassis Thickness = 1.2 - 1.6 mm [0.047 - 0.063 in.]				
PCMSP-CH-01S 	7.4 [0.291]	10.0 [0.394]	5.0 [0.197]	2000

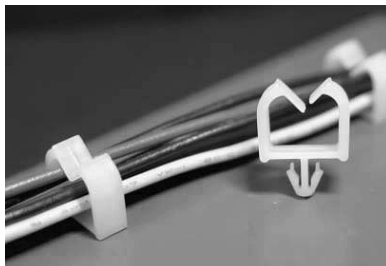

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
UL Listed: See  Logo



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Max. Panel Thickness "C", mm [in.]	Mounting Hole Dia. "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMSP-CH-1HK	8.2 [0.323]	10.6 [0.417]	1.6 [0.063]	2.8 [0.108]	6.9 [0.272]	3.0 [0.118]	2000
PCMSP-CH-01B	8.2 [0.323]	10.6 [0.417]	1.6 [0.063]	3.0 [0.118]	6.9 [0.272]	3.1 [0.122]	
PCMSP-CH-1BK	8.3 [0.327]	10.7 [0.421]	1.6 [0.063]		6.9 [0.272]	2.1 [0.083]	
PCMSP-CH-01C	7.4 [0.291]	10.0 [0.394]	1.6 [0.063]		5.0 [0.197]	2.2 [0.087]	
PCMSP-CH-01M 	6.5 [0.256]	9.0 [0.354]	0.8 [0.031]		5.0 [0.197]	3.1 [0.122]	
PCMSP-CH-01P	7.4 [0.291]	10.0 [0.394]	2.0 [0.079]		5.3 [0.209]	2.2 [0.087]	
PCMSP-CH-01U	8.3 [0.327]	10.7 [0.421]	1.6 [0.063]	3.5 [0.138]	7.0 [0.276]	2.5 [0.098]	
PCMSP-CH-01Q	6.6 [0.260]	9.0 [0.354]	1.0 [0.039]		4.9 [0.193]	3.0 [0.118]	
PCMSP-CH-01W	6.6 [0.260]	9.0 [0.354]	1.8 [0.071]		4.5 [0.177]	3.2 [0.126]	
PCMSP-CH-01N	9.0 [0.354]	11.6 [0.457]	1.2 [0.047]		5.3 [0.209]	2.7 [0.106]	


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Wire Saddles


Snap in Arrowhead Mount

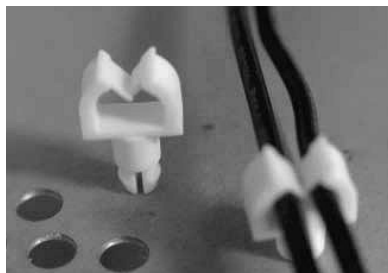


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

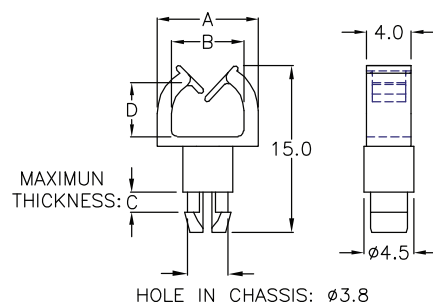


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Max. Panel Thickness "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\varnothing 3.8$ mm [0.150 in.]					
PCMSP-CH-04A	9.1 [0.358]	6.5 [0.256]	1.6 [0.063]	4.8 [0.189]	1000

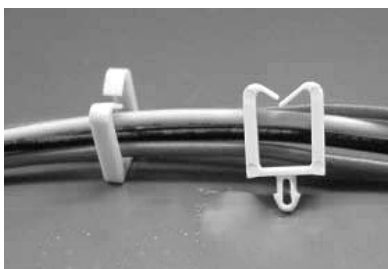


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

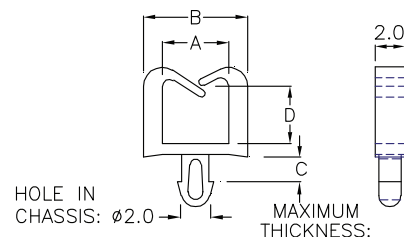


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Max. Panel Thickness "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\varnothing 2.0$ mm [0.079 in.]					
PCMSP-CH-01F	4.4 [0.173]	6.9 [0.272]	1.6 [0.063]	3.9 [0.154]	2000
PCMSP-CH-01K	3.3 [0.130]	5.7 [0.224]	1.6 [0.063]	3.6 [0.142]	
PCMSP-CH-01H	5.2 [0.205]	7.7 [0.303]	1.6 [0.063]	6.9 [0.272]	
PCMSP-CH-02F	4.4 [0.173]	6.9 [0.272]	2.5 [0.098]	3.9 [0.154]	

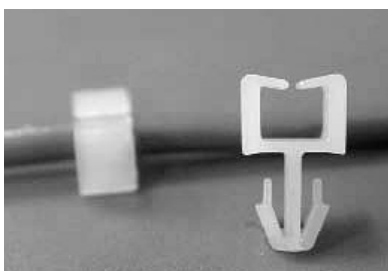

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

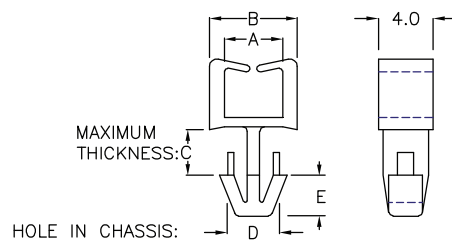For Thick Chassis

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Max. Panel Thickness "C", mm [in.]	Mounting Hole Dia. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMSP-CH-01L	4.3 [0.169]	6.5 [0.256]	3.0 [0.118]	3.5 [0.138]	6.6 [0.260]	2000
PCMSP-CH-1LA	4.3 [0.169]	6.5 [0.256]	1.1 [0.043]	3.6 [0.142]	4.3 [0.169]	
PCMSP-CH-1LB	4.3 [0.169]	6.5 [0.256]	4.0 [0.157]	3.6 [0.142]	7.4 [0.291]	
PCMSP-CH-01D	4.3 [0.169]	6.5 [0.256]	4.4 [0.173]	3.5 [0.138]	7.7 [0.303]	

Plastic Wire Saddles


Snap in Arrowhead Mount

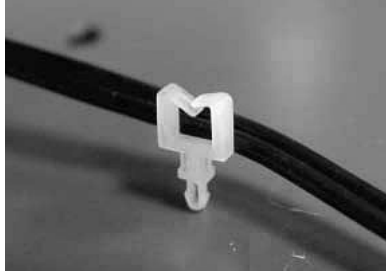

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

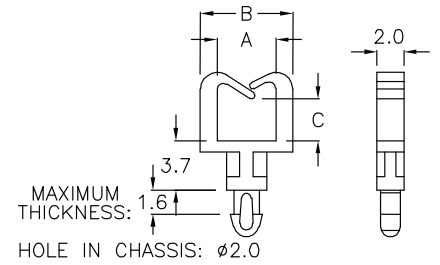

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = ø2.0 mm [0.079 in.] Max. Chassis Thickness = 1.6 mm [0.063 in.]				
PCMSP-CMC-3A	4.4 [0.173]	6.9 [0.272]	3.1 [0.122]	2000

Plastic Anti-Spin Wire Saddles

Anti-Spin Arrowhead Mount

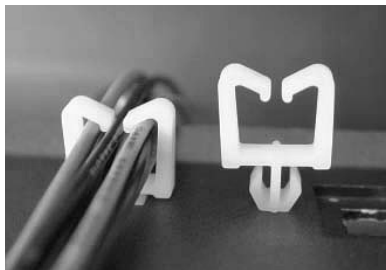


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Max. Panel Thickness "T", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMSP-CH-08	10.9 [0.429]	14.3 [0.563]	13.5 [0.531]	9.7 [0.382]	2.2 [0.087]	6.3 [0.248]	500
PCMSP-CH-08L	12.0 [0.472]	16.8 [0.661]	13.5 [0.531]	9.4 [0.370]	1.6 [0.063]	5.8 [0.228]	
PCMSP-CH-08A	11.0 [0.433]	14.3 [0.563]	15.7 [0.618]	12.0 [0.472]	2.2 [0.087]	6.1 [0.240]	

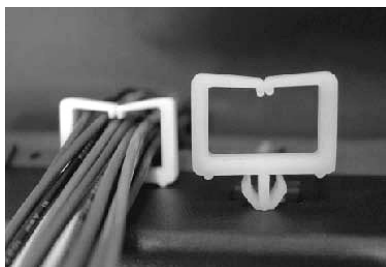


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

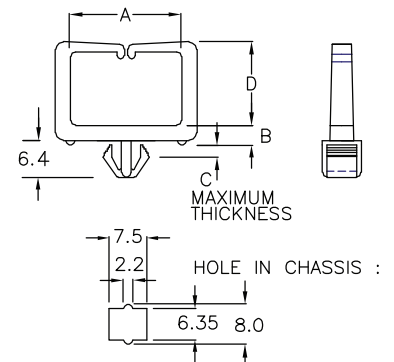

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Max. Panel Thickness "C",mm [in.]	Ref. "D", mm [in.]	Standard Package
PCMSP-CHN-01	21.6 [0.850]	3.9 [0.154]	1.6 [0.063]	16.5 [0.650]	200

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis


Plastic Stand-Off Wire Saddles
Snap in Arrowhead Mount




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

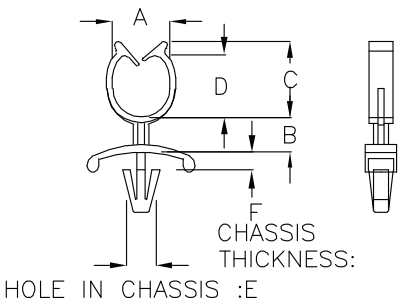


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Mounting Hole Dia. "E", ø, mm [in.]	Chassis Thickness "F", mm [in.]	Ref. "G", mm [in.]	Standard Package
PCMSP-TDA-4A	7.4 [0.291]	4.5 [0.177]	9.7 [0.382]	8.0 [0.315]	ø3.3 [0.130]	0.8-1.8 [0.031-0.071]	5.5 [0.217]	500
PCMSP-TDA-10	5.6 [0.220]	10.0 [0.394]	7.0 [0.276]	5.2 [0.205]	ø3.5 [0.138]	0.8-1.6 [0.031-0.063]	4.0 [0.157]	
PCMSP-TDA-13	7.4 [0.291]	13.0 [0.512]	9.7 [0.382]	8.0 [0.315]	ø3.5 [0.138]	0.6-1.6 [0.024-0.063]	4.2 [0.165]	

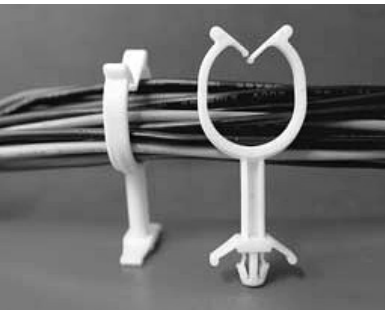

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-0
Color: Natural

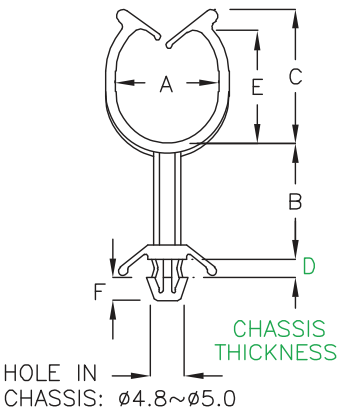

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = ø4.8 - 5.0 mm [0.189 - 0.197 in.]							
PCMSP-TU14-17	14.8 [0.583]	16.8 [0.661]	19.5 [0.768]	0.5-2.3 [0.020-0.091]	16.2 [0.638]	3.5 [0.138]	500
PCMSP-TU14-25	14.8 [0.583]	25.0 [0.984]	19.5 [0.768]	0.5-2.3 [0.020-0.091]	16.2 [0.638]	3.5 [0.138]	
PCMSP-TU14-27	14.8 [0.583]	26.8 [1.055]	19.5 [0.768]	0.5-2.3 [0.020-0.091]	16.2 [0.638]	3.6 [0.142]	
PCMSP-TU14-37	14.8 [0.583]	36.8 [1.449]	19.5 [0.768]	0.5-2.3 [0.020-0.091]	16.2 [0.638]	3.5 [0.138]	

Plastic Wire Saddles

Snap in Arrowhead Mount

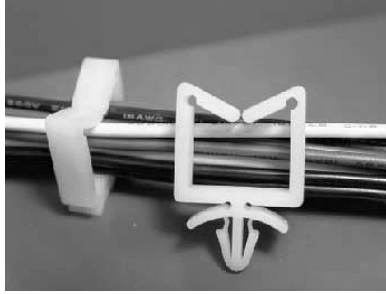


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating*: 94V-2
Color: Natural
UL Listed: See  Logo

*Except PCMSP-CH-30 (94V-0)

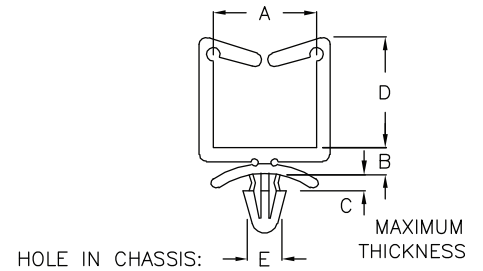


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Max. Panel Thickness "C", mm [in.]	Ref. "D", mm [in.]	Mounting Hole Dia. "E", ø, mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMSP-CH-05	10.9 [0.429]	4.1 [0.161]	1.9 [0.075]	9.7 [0.382]	ø4.8 [0.189]	5.9 [0.232]	500
PCMSP-CH-10	11.0 [0.433]	3.9 [0.154]	1.9 [0.075]	15.0 [0.591]	ø4.8 [0.189]	5.8 [0.228]	
PCMSP-CH-10A	10.9 [0.429]	4.1 [0.161]	2.0 [0.079]	11.2 [0.441]	ø4.8 [0.189]	2.8 [0.110]	
PCMSP-CH-10L	11.0 [0.433]	3.7 [0.146]	2.1 [0.083]	23.7 [0.933]	ø4.8 [0.189]	5.6 [0.220]	
PCMSP-CH-14	14.6 [0.575]	4.1 [0.161]	2.1 [0.083]	15.1 [0.594]	ø5.0 [0.197]	6.2 [0.244]	
PCMSP-CH-14A	14.6 [0.575]	4.0 [0.157]	3.0 [0.118]	15.5 [0.610]	ø5.0 [0.197]	4.2 [0.165]	
PCMSP-CH-16	15.9 [0.626]	4.1 [0.161]	2.1 [0.083]	16.4 [0.646]	ø5.0 [0.197]	5.9 [0.232]	200
PCMSP-CH-30 	22.7 [0.894]	4.8 [0.189]	3.2 [0.126]	16.0 [0.630]	ø5.0 [0.197]	7.1 [0.280]	

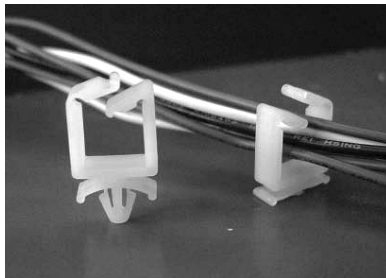

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

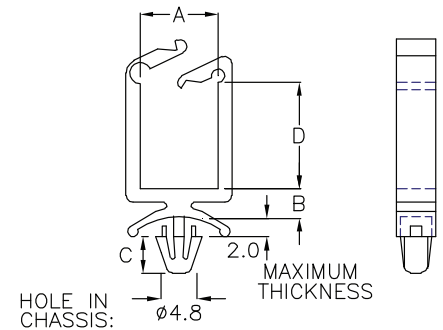

Par Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = ø4.8 mm [0.189 in.]					
Max. Chassis Thickness = 2.0 mm [0.079 in.]					
PCMSP-CM-10	10.8 [0.425]	4.1 [0.161]	5.0 [0.197]	19.4 [0.764]	500
PCMSP-CM-10L	23.7 [0.933]	4.7 [0.185]	5.0 [0.197]	32.2 [1.268]	
PCMSP-CM-10M	10.8 [0.425]	4.1 [0.161]	5.0 [0.197]	10.3 [0.406]	
PCMSP-CM-10Q	10.8 [0.425]	4.1 [0.161]	2.4 [0.094]	10.3 [0.406]	
PCMSP-CM-10S	10.8 [0.425]	4.1 [0.161]	5.0 [0.197]	7.3 [0.287]	


Plastic Locking-Top Wire Saddles
Snap in Arrowhead Mount

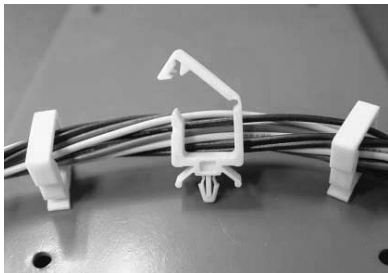


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

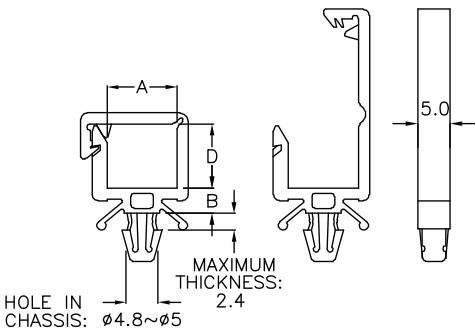


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\varnothing 4.8 - 5.0$ mm [0.189 - 0.197 in.] Max. Chassis Thickness = 2.4 mm [0.094 in.]				
PCMSP-CK-5	11.0 [0.433]	4.0 [0.157]	5.2 [0.205]	500
PCMSP-CK-10	11.0 [0.433]	4.0 [0.157]	10.2 [0.402]	
PCMSP-CK-14	16.0 [0.630]	4.0 [0.157]	14.4 [0.567]	

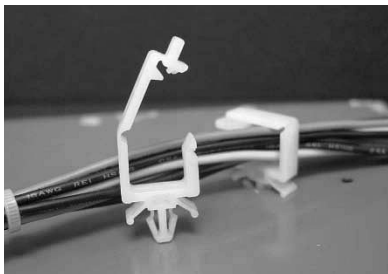


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

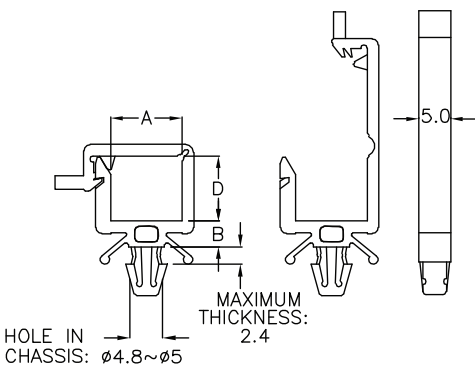


Part Number	Ref. "A", mm [in.]	Ma "B", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\varnothing 4.8 - 5.0$ mm [0.189 - 0.197 in.] Max. Chassis Thickness = 2.4 mm [0.094 in.]				
PCMSP-CK-10A	11.0 [0.433]	4.0 [0.157]	10.4 [0.409]	500
PCMSP-CK-14A	16.0 [0.630]	4.0 [0.157]	14.0 [0.551]	

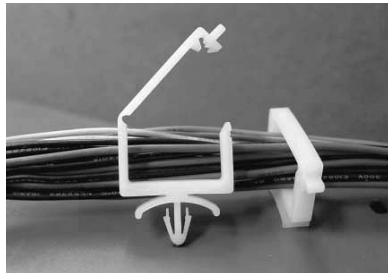

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

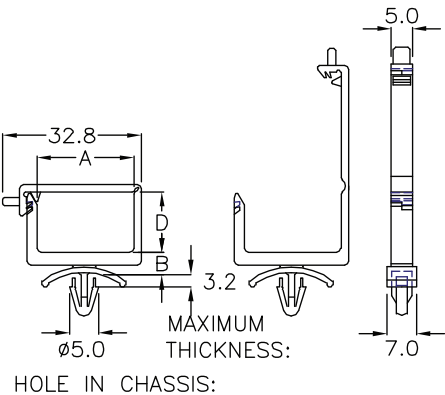

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\varnothing 5.0$ mm [0.197 in.] Max. Chassis Thickness = 3.2 mm [0.126 in.]				
PCMSP-CH-20A	22.9 [0.902]	5.3 [0.209]	14.2 [0.559]	500


Plastic Locking-Top Wire Saddles
Snap in Arrowhead Mount

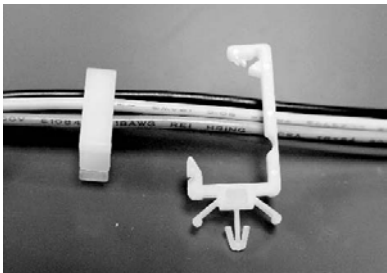


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

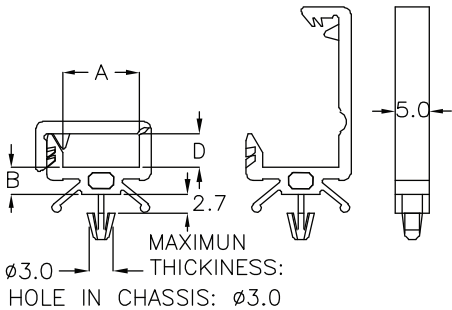


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = 3.0 mm [0.118 in.] Max. Chassis Thickness = 2.7 mm [0.106 in.]				
PCMSP-CHR-05	11.1 [0.437]	4.0 [0.157]	5.2 [0.205]	500

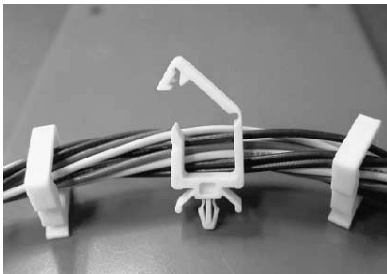

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

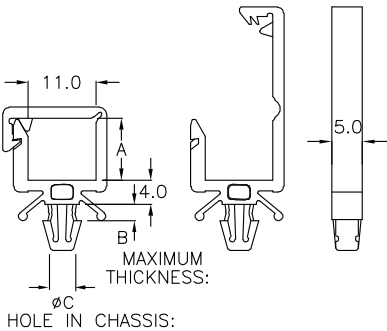

Part Number	Ref. "A", mm [in.]	Max. Panel Thickness "B", mm [in.]	Mounting Hole Dia. "C", mm [in.]	Standard Package
PCMSP-CHJ-05	5.2 [0.205]	2.4 [0.094]	3.5 [0.138]	500
PCMSP-CHJ-10	10.2 [0.402]	2.4 [0.094]	3.5 [0.138]	

Plastic Stand-Off Locking-Top Wire Saddles


Snap in Arrowhead Mount

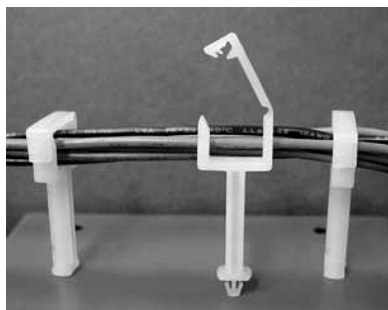

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

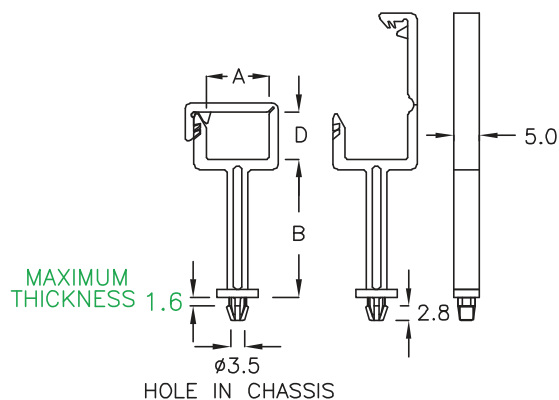

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = $\varnothing 3.5$ mm [0.138 in.] Max. Chassis Thickness = 1.6 mm [0.063 in.]				
PCMSP-CHB-26A	12.1 [0.476]	26.7 [1.051]	9.1 [0.358]	100

Plastic Locking-Top Wire Saddles

Anti-Spin Arrowhead Mount

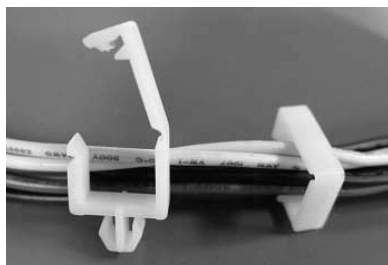


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

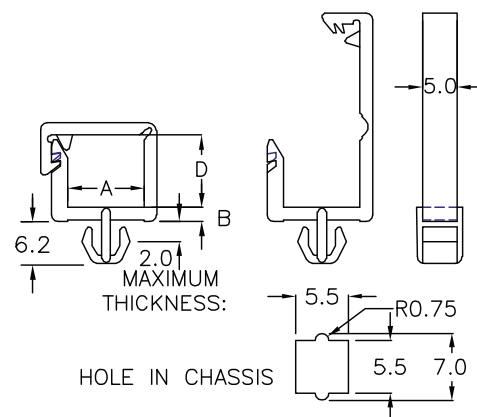


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "D", mm [in.]	Standard Package
Max. Panel Thickness = 2.0 mm [0.079]				
PCMSP-CKH-11	11.1 [0.437]	2.0 [0.079]	10.5 [0.413]	500
PCMSP-CKH-13	16.0 [0.630]	2.0 [0.079]	14.5 [0.571]	



RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

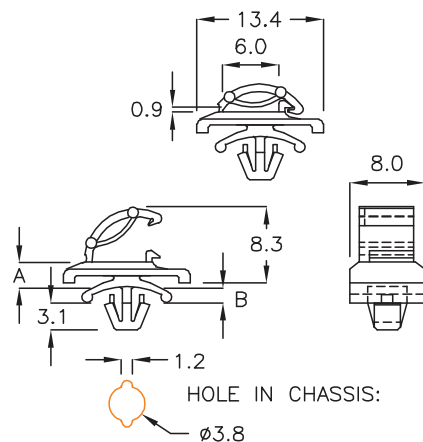

Part Number	Ref. "A", mm [in.]	Chassis Thickness "B", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = $\varnothing 4.5 - 5.0$ mm [$\varnothing 0.177 - 0.197$ in.]			
PCMSP-CHX-01	2.7 [0.106]	0.8-1.6 [0.031-0.063]	1000
PCMSP-CHX-1A	2.7 [0.106]	0.8-2.5 [0.031-0.098]	

Plastic Side-Entry Wire Saddles


Snap in Arrowhead Mount

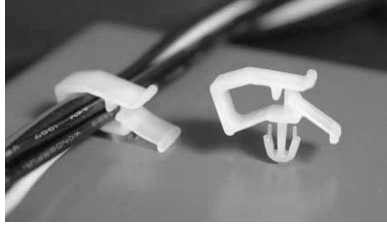


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

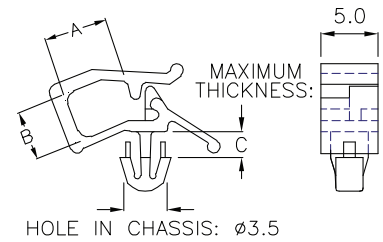


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Max. Chassis Thickness "C", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = Ø3.5 mm [0.138 in.]				
PCMSP-CH-03S	4.2 [0.165]	2.8 [0.110]	2.0 [0.079]	1000
PCMSP-CH-03	5.5 [0.217]	4.3 [0.169]	2.0 [0.079]	
PCMSP-CH-03F	4.2 [0.165]	2.6 [0.102]	2.4 [0.094]	

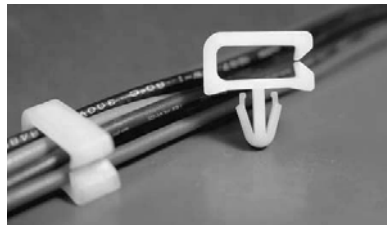


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

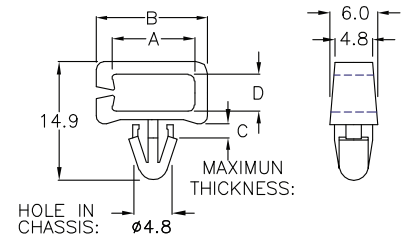


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Max. Chassis Thickness "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = Ø4.8 mm [0.189 in.]					
PCMSP-CH-02	10.2 [0.402]	14.2 [0.559]	1.2 [0.047]	4.6 [0.181]	1000

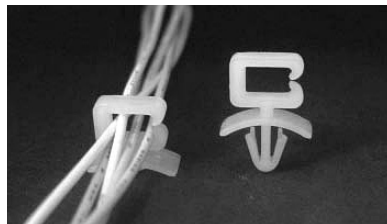

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

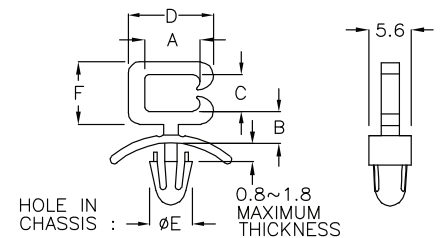

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Mounting Hole Dia. "E", ø, mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMSP-CHM-01	7.3 [0.287]	4.4 [0.173]	4.8 [0.189]	11.3 [0.445]	Ø4.5 [0.177]	8.2 [0.323]	500


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Side-Entry Wire Saddles

Anti-Spin Arrowhead Mount

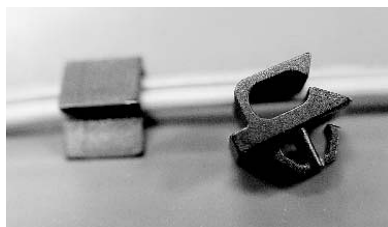


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

Anti-Spin Mount

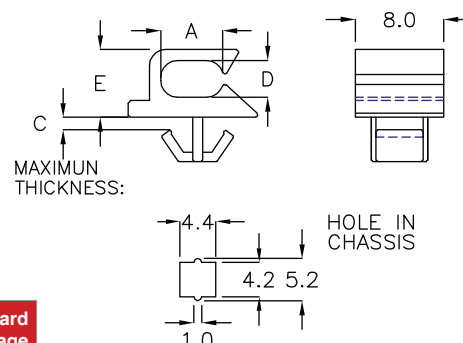

Part Number	Ref. "A", mm [in.]	Max. Panel Thickness "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMSP-CU-01H	5.6 [0.220]	0.6 [0.024]	3.3 [0.130]	6.1 [0.240]	1000

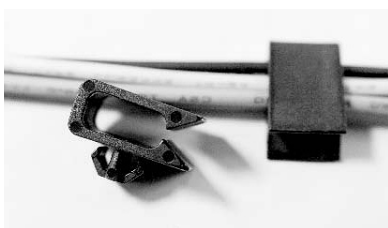


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

Anti-Spin Mount

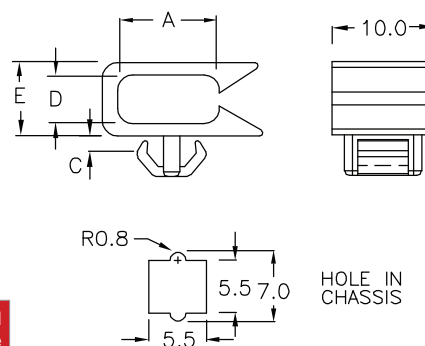

Part Number	Ref. "A", mm [in.]	Max. Panel Thickness "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMSP-CU-03	10.0 [0.394]	1.6 [0.063]	4.8 [0.189]	7.2 [0.283]	1000

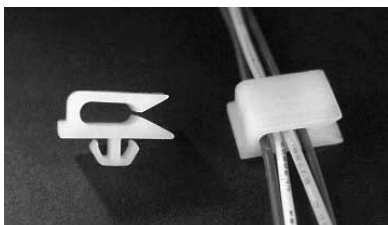


RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

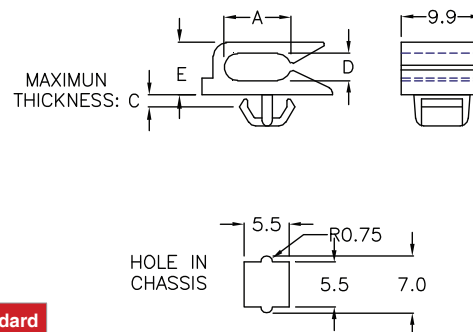

Part Number	Ref. "A", mm [in.]	Max. Panel Thickness "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMSP-CU-01	8.2 [0.323]	1.0 [0.039]	3.3 [0.130]	6.4 [0.252]	1000
PCMSP-CU-01F	9.0 [0.354]	1.0 [0.039]	4.6 [0.181]	7.6 [0.299]	

Plastic Side-Entry Stand-Off Wire Saddle
Snap in Arrowhead Mount

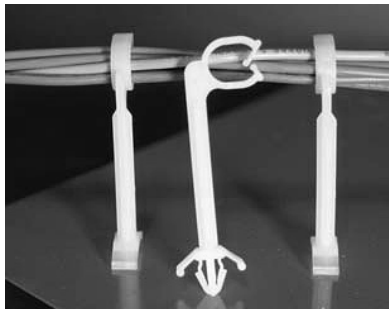

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Fig. 1


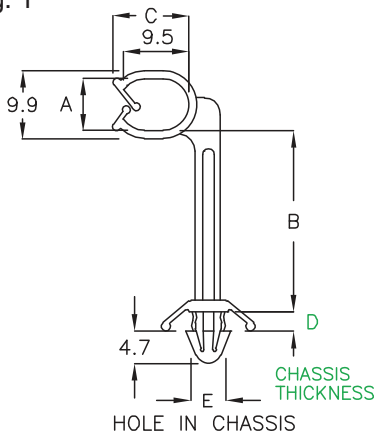


Fig. 2



Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Mounting Hole Dia. "E", ø, mm [in.]	Standard Package
PCMSP-TUA-34	1	7.5 [0.295]	34.2 [1.346]	11.0 [0.433]	0.5-2.1 [0.020-0.083]	ø4.8-5.0[0.189-0.197]	500
PCMSP-TUA-40	2	7.5 [0.295]	38.8 [1.528]	11.0 [0.433]	1.6 [0.063]	ø4.5 [0.177]	

Plastic Releasable Wire Saddle
Anti-Spin Arrowhead Mount

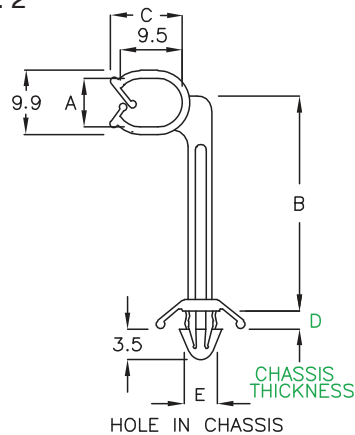


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

Anti-Spin Mount

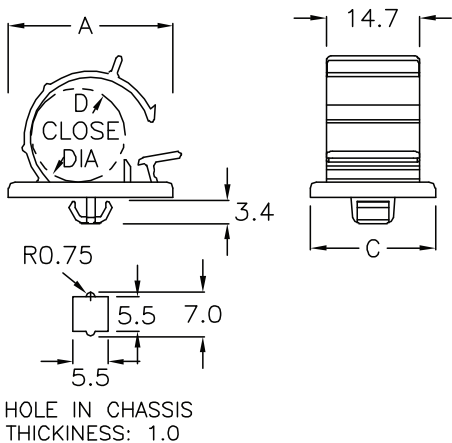

Part Number	Ref. "A", mm [in.]	Ref. "C", mm [in.]	Close/Bundle Dia. "D", ø, mm [in.]	Standard Package
Max. Panel Thickness = 1.0 mm [0.039]				
PCMSP-CD-4	25.8 [1.016]	19.6 [0.772]	ø12.6 [0.496]	100


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Releasable Cable Clamps


Snap in Arrowhead Mount

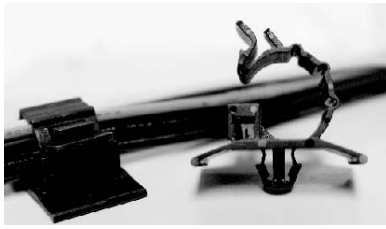


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

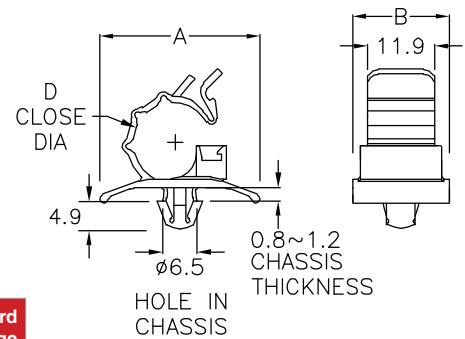


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Close/Bundle Dia. "D", ø, mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = $\phi 6.5$ mm [0.256 in.] Chassis Thickness = 0.8 - 1.2 mm [0.031 - 0.047 in.]				
PCMSD-CCD-01	28.5 [1.122]	17.3 [0.681]	$\phi 10.0$ [0.394]	200

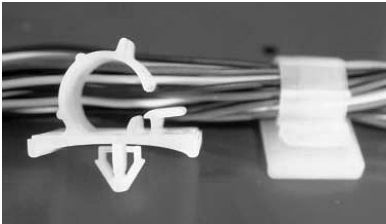


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

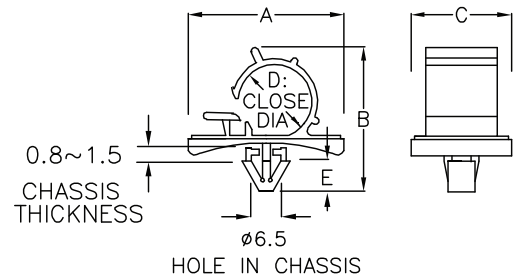

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close/Bundle Dia. "D", ø, mm [in.]	Ref. "E", mm [in.]	Pkg.
Mounting Hole Dia. in Chassis = $\phi 6.5$ mm [0.256 in.] Chassis Thickness = 0.8 - 1.5 mm [0.031 - 0.059 in.]						
PCMSD-CC-3	26.0 [1.024]	23.9 [0.941]	17.0 [0.669]	$\phi 9.5$ [0.374]	5.0 [0.197]	200
PCMSD-CC-3S	21.0 [0.827]	21.3 [0.839]	19.0 [0.748]	$\phi 7.8$ [0.307]	5.1 [0.201]	
PCMSD-CC-4	30.3 [1.193]	32.0 [1.260]	19.4 [0.764]	$\phi 13.5$ [0.531]	5.2 [0.205]	100
PCMSD-CC-4A	30.2 [1.189]	33.7 [1.327]	19.3 [0.760]	$\phi 17.0$ [0.669]	5.1 [0.201]	

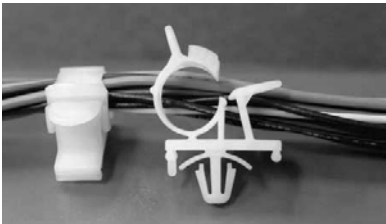


RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

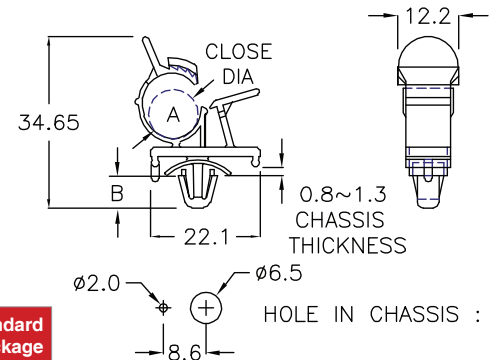

Part Number	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = See Drawing Chassis Thickness = 0.8 - 1.3 mm [0.031 - 0.051 in.]			
PCMSD-FWD-01	$\phi 7.7-10.0$ [0.303-0.394]	6.8 [0.268]	500
PCMSD-FWD-02	$\phi 8.0-9.5$ [0.315-0.374]	6.9 [0.272]	

Plastic Adjustable Cable Clamps
Anti-Spin Snap-in Mount

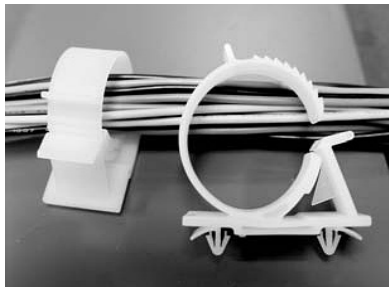


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

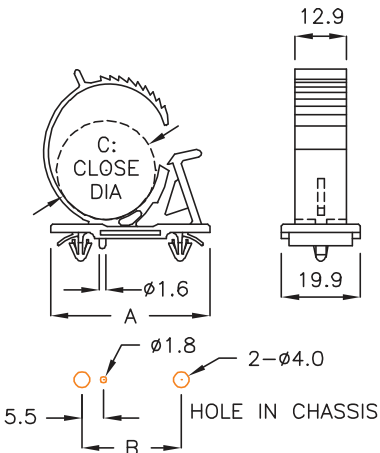

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Close/Bundle Dia. "C", ø, mm [in.]	Chassis Thickness, mm [in.]	Pkg.
PCMSF-FWW-40	40.0 [1.575]	25.0 [0.984]	ø22.5-26.5 [0.886-1.043]	0.8-2.0 [0.031-0.079]	100
PCMSF-FWW-40C	40.0 [1.575]	25.0 [0.984]	ø22.5-26.5 [0.886-1.043]	0.8-1.2 [0.031-0.047]	

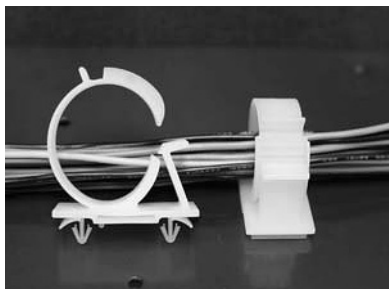


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

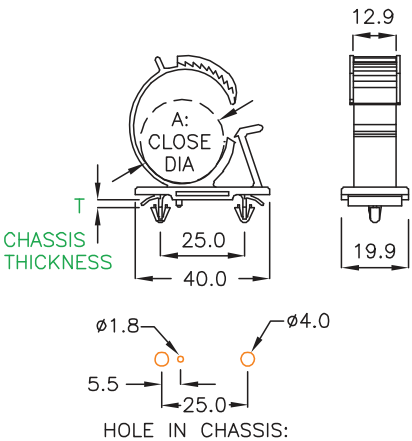

Part Number	Close/Bundle Dia. "A", ø, mm [in.]	Chassis Thickness "T", mm [in.]	Standard Package
PCMSF-FWQ-40	ø22.5-26.5 [0.886-1.043]	0.8-2.0 [0.031-0.079]	100

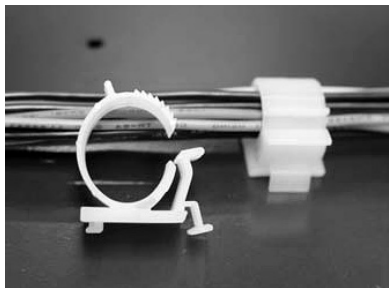


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

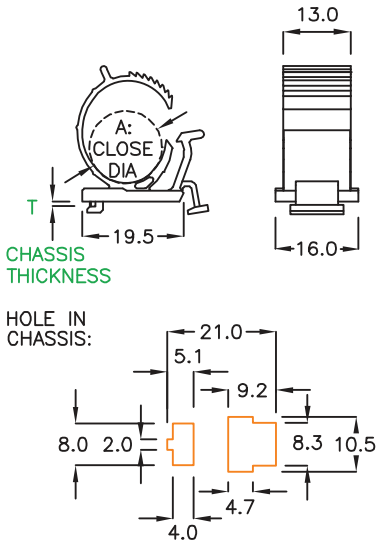


Part Number	Close/Bundle Dia. "A", ø, mm [in.]	Chassis Thickness "T", mm [in.]	Standard Package
PCMSF-FW-24	ø13.0-14.5 [0.512-0.571]	0.8 [0.031]	200

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Plastic Stand-Off Twist Locks


Snap-In Arrowhead Mount

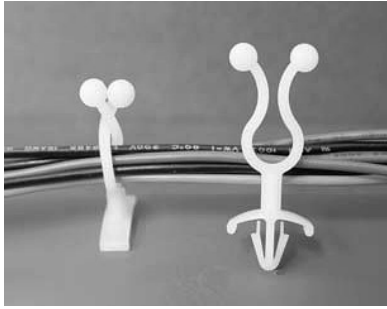

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
UL Listed: See  Logo

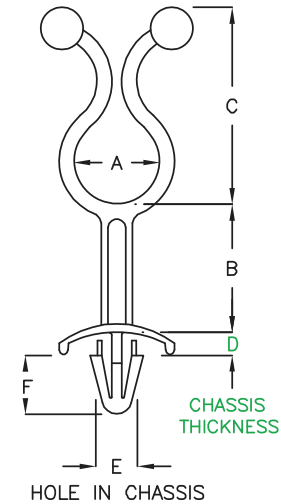


Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Mounting Hole Dia. "E", ø, mm [in.]	Ref. "F", mm [in.]	Pkg.
PCMSP-TA5-60	5.1 [0.201]	ø4.4 [0.173]	60.4 [2.378]	20.7 [0.815]	0.8-2.7 [0.031-0.106]	ø4.8-5.0 [0.189-0.197]	7.2 [0.283]	500
PCMSP-TA8-3 	8.6 [0.339]	ø7.0 [0.276]	3.5 [0.138]	19.0 [0.748]	1.2-1.8 [0.047-0.071]	ø4.0 [0.157]	3.0 [0.118]	1000
PCMSP-TA8-3L	8.6 [0.339]	ø7.0 [0.276]	3.2 [0.126]	19.0 [0.748]	1.2-2.3 [0.047-0.091]	ø4.0 [0.157]	3.3 [0.130]	
PCMSP-TA8-6 	8.8 [0.346]	ø7.0 [0.276]	5.6 [0.220]	19.1 [0.752]	1.2-1.8 [0.047-0.071]	ø4.8-5.0 [0.189-0.197]	7.6 [0.299]	
PCMSP-TA8-10 	8.0 [0.315]	ø6.8 [0.268]	10.5 [0.413]	22.7 [0.894]	1.2-2.8 [0.047-0.110]	ø5.0 [0.197]	7.2 [0.283]	
PCMSP-TA8-20 	8.0 [0.315]	ø6.8 [0.268]	20.2 [0.795]	22.7 [0.894]	1.2-2.8 [0.047-0.110]	ø5.0 [0.197]	7.2 [0.283]	500
PCMSP-TA10-3 	10.9 [0.429]	ø9.5 [0.374]	3.0 [0.118]	27.0 [1.063]	1.1-2.6 [0.043-0.102]	ø5.0 [0.197]	7.3 [0.287]	
PCMSP-TA10-3A	10.9 [0.429]	ø9.5 [0.374]	3.1 [0.122]	27.0 [1.063]	1.2-3.8 [0.047-0.150]	ø5.0 [0.197]	6.6 [0.260]	
PCMSP-TA10-15 	11.0 [0.433]	ø9.7 [0.382]	15.5 [0.610]	27.0 [1.063]	1.1-2.6 [0.043-0.102]	ø5.0 [0.197]	7.1 [0.280]	
PCMSP-TA10-35 	10.9 [0.429]	ø9.6 [0.378]	35.0 [1.378]	27.0 [1.063]	1.5-3.0 [0.059-0.118]	ø5.0 [0.197]	7.2 [0.283]	
PCMSP-TA11-4 	11.0 [0.433]	ø9.5 [0.374]	4.4 [0.173]	26.4 [1.039]	0.6-2.4 [0.024-0.094]	ø5.0 [0.197]	7.5 [0.295]	
PCMSP-TA11-5	11.5 [0.453]	ø10.3 [0.406]	4.7 [0.185]	28.0 [1.102]	0.8-2.0 [0.031-0.079]	ø4.0 [0.157]	5.5 [0.217]	
PCMSP-TA11-50 	11.5 [0.453]	ø10.1 [0.398]	50.2 [1.976]	26.7 [1.051]	0.8-2.7 [0.031-0.106]	ø4.8-5.0 [0.189-0.197]	7.1 [0.280]	
PCMSP-TA11-21 	11.8 [0.465]	ø10.2 [0.402]	21.2 [0.835]	27.5 [1.083]	0.6-2.7 [0.024-0.106]	ø5.0 [0.197]	6.6 [0.260]	
PCMSP-TA11-43	11.5 [0.453]	ø10.1 [0.398]	43.5 [1.713]	26.7 [1.051]	0.8-2.7 [0.031-0.106]	ø4.8-5.0 [0.189-0.197]	7.0 [0.276]	
PCMSP-TA12-10	12.0 [0.472]	ø10.2 [0.402]	10.1 [0.398]	27.0 [1.063]	1.2-3.2 [0.047-0.126]	ø4.8-5.0 [0.189-0.197]	6.6 [0.260]	200
PCMSP-TA14-2	14.4 [0.567]	ø13.0 [0.512]	2.4 [0.094]	30.5 [1.201]	0.3-1.8 [0.012-0.071]	ø4.8 [0.189]	7.6 [0.299]	
PCMSP-TA16-4 	16.0 [0.630]	ø14.0 [0.551]	3.5 [0.138]	30.8 [1.213]	1.3-2.9 [0.051-0.114]	ø5.0 [0.197]	7.2 [0.283]	
PCMSP-TA16-60 	16.0 [0.630]	ø14.5 [0.571]	60.4 [2.378]	32.0 [1.260]	0.8-2.7 [0.031-0.106]	ø4.8-5.0 [0.189-0.197]	7.1 [0.280]	
PCMSP-TA19-30	18.7 [0.736]	ø16.5 [0.650]	30.0 [1.181]	36.4 [1.433]	0.9-3.0 [0.035-0.118]	ø4.8-5.0 [0.189-0.197]	7.0 [0.276]	500
PCMSP-TA20-8	20.6 [0.811]	ø18.4 [0.724]	8.1 [0.319]	36.7 [1.445]	0.8-3.0 [0.031-0.118]	ø4.8-5.0 [0.189-0.197]	7.1 [0.280]	
PCMSP-TA20-16 	20.3 [0.799]	ø18.3 [0.720]	16.2 [0.638]	36.3 [1.429]	1.5-3.1 [0.059-0.122]	ø5.0 [0.197]	7.2 [0.283]	200
PCMSP-TA24-3 	24.3 [0.957]	ø22.0 [0.866]	3.0 [0.118]	43.6 [1.717]	0.6-2.7 [0.024-0.106]	ø5.0 [0.197]	6.9 [0.272]	
PCMSP-TA37-3 	37.5 [1.476]	ø35.0 [1.378]	3.3 [0.130]	59.3 [2.335]	1.1-2.4 [0.043-0.094]	ø4.8-5.0 [0.189-0.197]	6.7 [0.264]	

all dimension units in millimeter (mm) unless noted otherwise

Plastic Stand-Off Twist Locks


Snap-In Arrowhead Mount

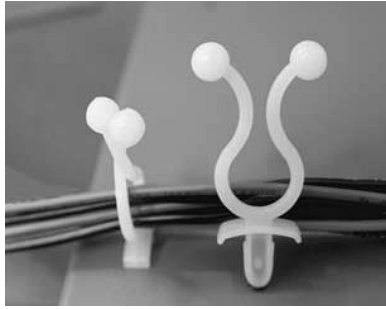

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

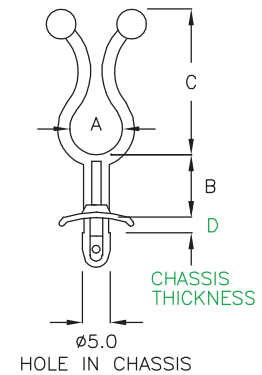


Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = ø5.0 mm [0.197 in.]						
PCMSP-TA10-4	10.5 [0.413]	ø9.3 [0.366]	4.0 [0.157]	28.0 [1.102]	1.9-2.9 [0.075-0.114]	500
PCMSP-TA10-20	10.5 [0.413]	ø9.4 [0.370]	20.0 [0.787]	27.6 [1.087]	1.8-2.8 [0.071-0.110]	
PCMSP-TA16-3	15.9 [0.626]	ø14.4 [0.567]	3.5 [0.138]	32.0 [1.260]	1.0-2.6 [0.039-0.102]	
PCMSP-TA16-18	16.0 [0.630]	ø14.4 [0.567]	18.0 [0.709]	32.0 [1.260]	1.2-2.4 [0.047-0.094]	



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

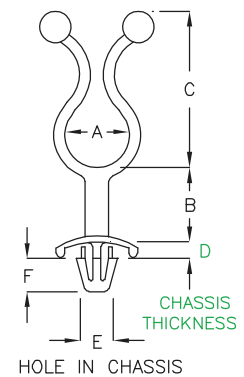

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Mounting Hole Dia. "E", mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMSP-TA7-23	6.7 [0.264]	ø5.5 [0.217]	23.7 [0.933]	17.2 [0.677]	0.5-2.0 [0.020-0.079]	ø5.0 [0.197]	3.2 [0.126]	500
PCMSP-TA8-15A	8.6 [0.339]	ø7.5 [0.295]	15.0 [0.591]	26.3 [1.035]	1.2-3.0 [0.047-0.118]	ø4.0 [0.157]	5.2 [0.205]	
PCMSP-TA9-15	10.7 [0.421]	ø9.4 [0.370]	15.0 [0.591]	26.3 [1.035]	1.2-3.0 [0.047-0.118]	ø4.0 [0.157]	5.2 [0.205]	
PCMSP-TA11-4A	10.8 [0.425]	ø9.3 [0.366]	4.6 [0.181]	26.3 [1.035]	0.3-2.2 [0.012-0.087]	ø5.0 [0.197]	5.6 [0.220]	
PCMSP-TA11-50A	11.5 [0.453]	ø10.1 [0.398]	50.2 [1.976]	26.7 [1.051]	0.8-2.7 [0.031-0.106]	ø4.8-5.0 [0.189-0.197]	5.1 [0.201]	
PCMSP-TA14-2C	14.8 [0.583]	ø13.0 [0.512]	2.4 [0.094]	30.5 [1.201]	0.8-1.6 [0.031-0.063]	ø4.8 [0.189]	5.1 [0.201]	

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis


Plastic Stand-Off Twist Locks
Snap-In Arrowhead Mount




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

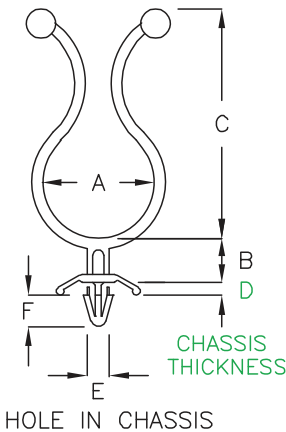


Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Mounting Hole Dia. "E", ø, mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMSP-TB20-8	20.6 [0.811]	ø18.5 [0.728]	8.1 [0.319]	42.0 [1.654]	1.0-2.0 [0.039-0.079]	ø3.5 [0.138]	6.0 [0.236]	500
PCMSP-TB8-8	9.5 [0.374]	ø7.7 [0.303]	8.0 [0.315]	23.3 [0.917]	0.8-2.4 [0.031-0.094]	ø3.0 [0.118]	3.7 [0.146]	

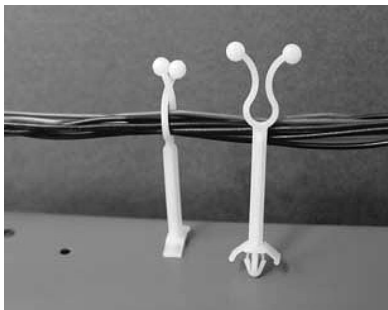

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

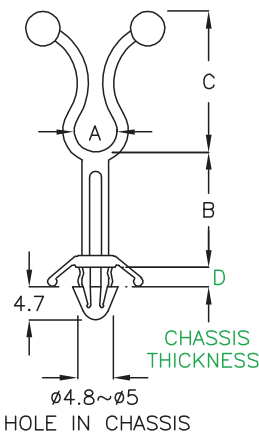

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = ø4.8 - 5.0 mm [0.189 - 0.197 in.]						
PCMSP-TK6-34	6.1 [0.240]	ø5.1 [0.201]	34.0 [1.339]	20.2 [0.795]	0.5-2.3 [0.020-0.091]	500

Plastic Stand-Off Twist Locks

Anti-Spin Mount

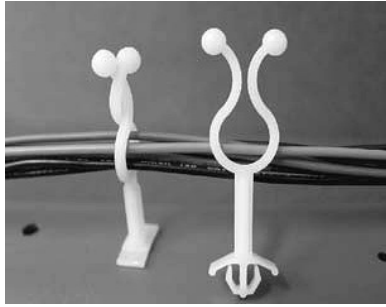


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural


Anti-Spin Mount

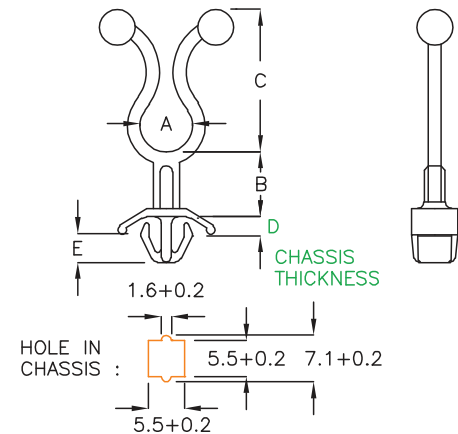

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Chassis Thickness "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMSP-TD5-36	5.4 [0.213]	ø4.5 [0.177]	36.5 [1.437]	18.4 [0.724]	0.8-1.2 [0.031-0.047]	3.8 [0.150]	500
PCMSP-TD8-3	8.0 [0.315]	ø6.7 [0.264]	3.2 [0.126]	21.7 [0.854]	0.8-1.4 [0.031-0.055]	5.3 [0.209]	1000
PCMSP-TD12-3	11.8 [0.465]	ø10.6 [0.417]	3.3 [0.130]	29.0 [1.142]	0.8-1.4 [0.031-0.055]	5.3 [0.209]	
PCMSP-TD11-20A	11.5 [0.453]	ø10.0 [0.394]	19.9 [0.783]	28.2 [1.110]	0.8-2.2 [0.031-0.087]	3.6 [0.142]	500

Plastic Stand-Off 45° Twist Lock

Anti-Spin Mount

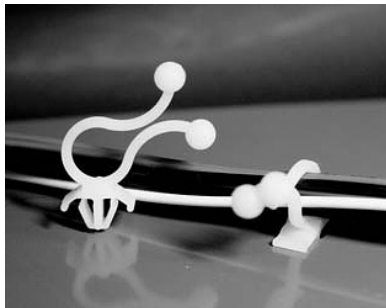


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

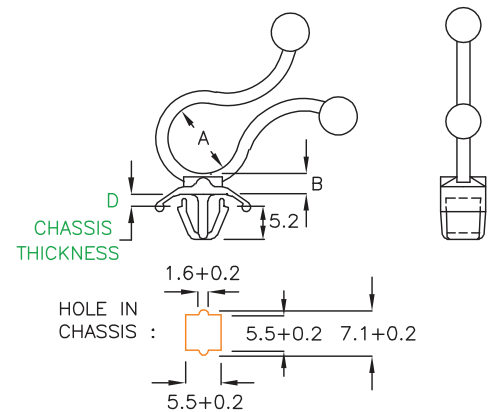


Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Chassis Thickness "D", mm [in.]	Standard Package
PCMSP-TDY11-3	11.0 [0.433]	ø9.6 [0.378]	3.2 [0.126]	0.8-1.2 [0.031-0.047]	500

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis


Plastic Side-Entry Twist Locks
Snap-In Arrowhead Mount

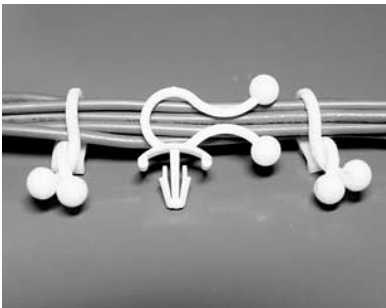

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

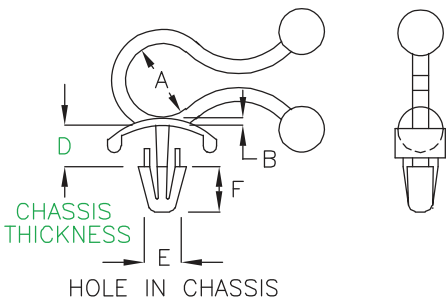

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Chassis Thickness "D", mm [in.]	Mounting Hole Dia. "E", ø, mm [in.]	Ref. "F", mm [in.]	Standard Package
PCMSP-TDY8-1	8.2 [0.323]	ø7.0 [0.276]	1.0 [0.039]	2.7-3.9 [0.106-0.154]	ø4.0 [0.157]	5.1 [0.201]	1000
PCMSP-TDY8-1A	8.3 [0.327]	ø7.1 [0.280]	1.0 [0.039]	0.8-2.1 [0.031-0.083]	ø3.0 [0.118]	3.7 [0.146]	
PCMSP-TDY8-1C	8.2 [0.323]	ø7.1 [0.280]	1.0 [0.039]	0.8-2.3 [0.031-0.091]	ø4.5 [0.177]	4.9 [0.193]	


Plastic Stand-Off Webbed Twist Locks
Snap-In Arrowhead Mount

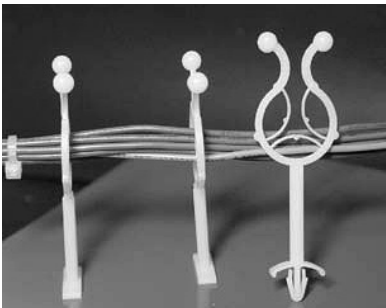

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

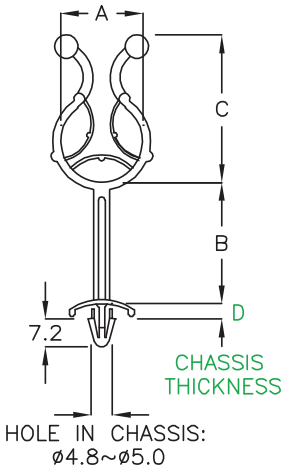

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Max. Bundle Dia., ø, mm [in.]	Chassis Thickness "D", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = ø4.8 - 5.0 mm [0.189 - 0.197 in.]						
PCMSP-TE21-04	20.5 [0.807]	4.0 [0.157]	37.2 [1.465]	ø14.5 [0.571]	1.0-3.1 [0.039-0.122]	500
PCMSP-TE21-32	20.5 [0.807]	32.1 [1.264]	37.2 [1.465]	ø14.5 [0.571]	1.0-3.1 [0.039-0.122]	
PCMSP-TE21-40	20.5 [0.807]	40.1 [1.579]	37.2 [1.465]	ø14.5 [0.571]	1.0-3.1 [0.039-0.122]	

Plastic Stand-Off Releasable Wire Clamps


Snap-In Arrowhead Mount

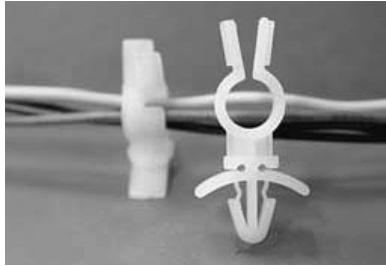


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural




Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Close/Bundle Dia. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = $\phi 4.5 - 5.0$ mm [$\phi 0.177 - 0.197$ in.] Chassis Thickness = $0.7 - 2.0$ mm [$0.028 - 0.079$ in.]					
PCMSP-CS-6	6.4 [0.250]	14.0 [0.551]	6.2 [0.244]	5.8 [0.228]	500
PCMSP-CS-12	13.0 [0.512]	14.0 [0.551]	6.2 [0.244]	5.9 [0.232]	

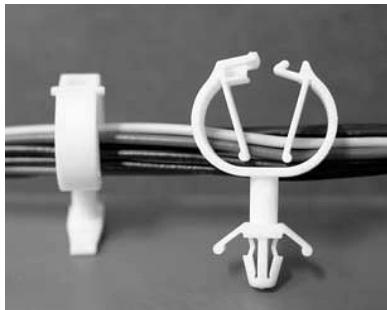


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-0
Color: Natural

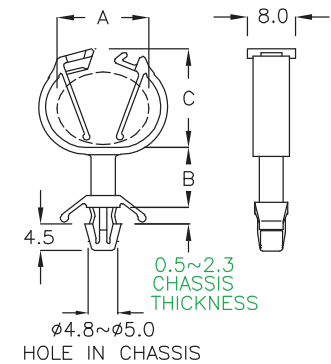


Part Number	Bundle Dia. "A", ϕ , mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = $\phi 4.8 - 5.0$ mm [$\phi 0.189 - 0.197$ in.] Chassis Thickness = $0.5 - 2.3$ mm [$0.020 - 0.091$ in.]				
PCMSP-TUT-10	$\phi 9.0 - 12.5$ [0.354-0.492]	10.0 [0.394]	15.6 [0.614]	500

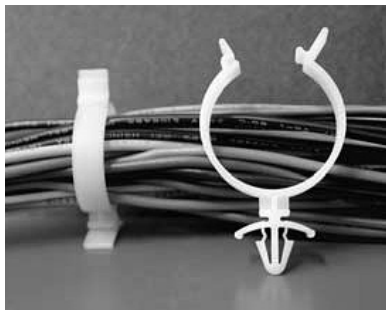

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

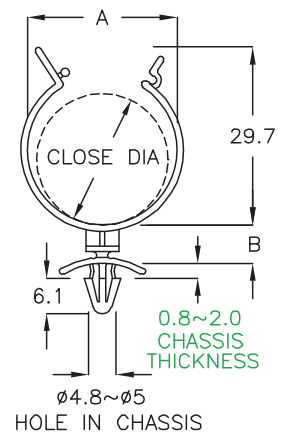

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ϕ , mm [in.]	Ref. "B", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = $\phi 4.8 - 5.0$ mm [$\phi 0.189 - 0.197$ in.] Chassis Thickness = $0.8 - 2.0$ mm [$0.031 - 0.079$ in.]				
PCMSP-TC20-6	24.1 [0.949]	$\phi 20.5$ [0.807]	6.6 [0.258]	200


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Cable Clamps

Split Arrowhead Mount

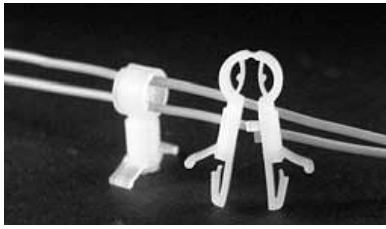


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

For Fiber Optics Cable

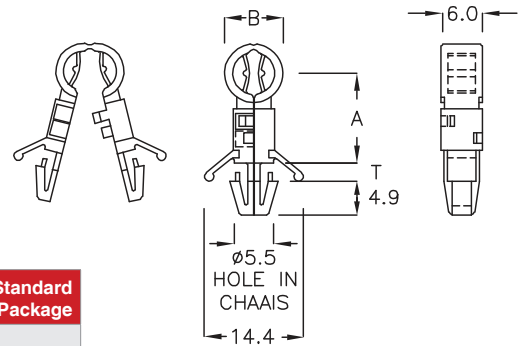


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Chassis Thickness "T", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = $\varnothing 5.5$ mm [$\varnothing 0.217$ in.]				
PCMSP-CCA-13	13.0 [0.512]	8.5 [0.335]	0.8-2.3 [0.031-0.091]	500

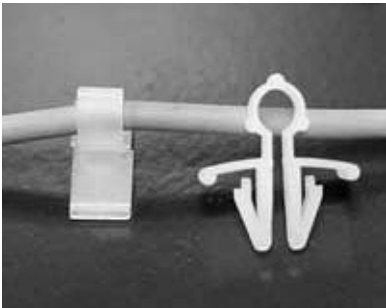


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

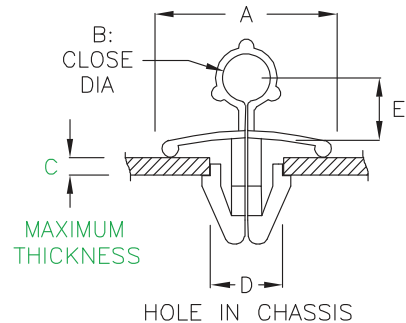


Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "B", mm [in.]	Max. Chassis Thickness "C", mm [in.]	Mounting Hole Dia. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMSP-TA-3C	15.5 [0.610]	3.8 [0.150]	1.6 [0.063]	6.5 [0.256]	5.7 [0.224]	1000

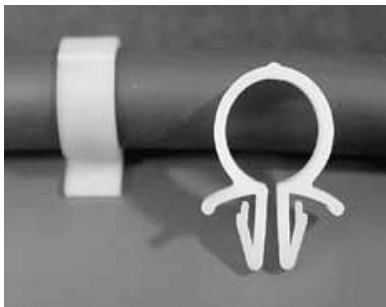

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

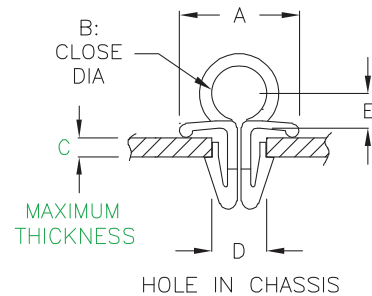

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "B", mm [in.]	Max. Chassis Thickness "C", mm [in.]	Mounting Hole Dia. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
PCMSP-TA-3M	14.8 [0.583]	3.8 [0.150]	1.2 [0.047]	6.5 [0.256]	5.7 [0.224]	1000
PCMSP-TA-5M	11.7 [0.461]	5.0 [0.197]	2.0 [0.079]	6.5 [0.256]	4.3 [0.169]	
PCMSP-TA-6	12.5 [0.492]	5.5 [0.217]	2.0 [0.079]	5.5 [0.217]	5.0 [0.197]	
PCMSP-TA-7	14.1 [0.555]	7.5 [0.295]	2.0 [0.079]	5.5 [0.217]	4.6 [0.181]	
PCMSP-TA-8	16.5 [0.650]	8.4 [0.331]	1.6 [0.063]	6.0 [0.236]	6.2 [0.244]	
PCMSP-TA-8A	13.5 [0.531]	8.4 [0.331]	1.6 [0.063]	5.5 [0.217]	6.2 [0.244]	
PCMSP-TA-11	16.2 [0.638]	11.1 [0.437]	1.9 [0.075]	6.0 [0.236]	7.0 [0.276]	

Plastic Cable Hanger


One-Piece, Arrowhead/Rivet Mount




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

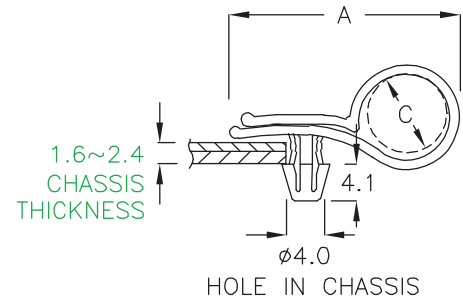

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "C", ø, mm [in.]	Standard Package
Mounting Hole Dia. in chassis = ø4.0 mm [0.157 in.] Chassis Thickness = 1.6 - 2.4 mm [0.063 - 0.094 in.]			
PCMSP-PC-08T	24.4 [0.961]	ø7.8 [0.307]	500

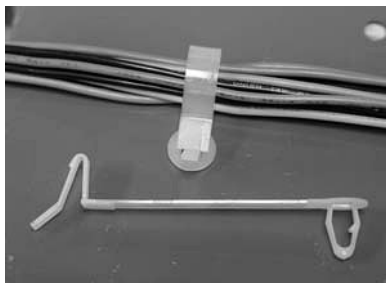


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Releasable Design

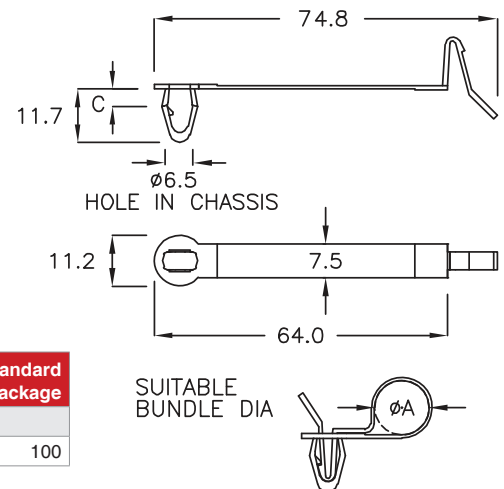


Part Number	Bundle Dia. "A", ø, mm [in.]	Chassis Thickness "C", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = 6.5 mm [0.256 in.]			
PCMSP-PDT-1A	ø13.0 [0.512]	0.8-2.4 [0.031-0.094]	100

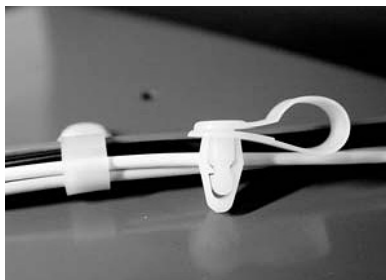

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

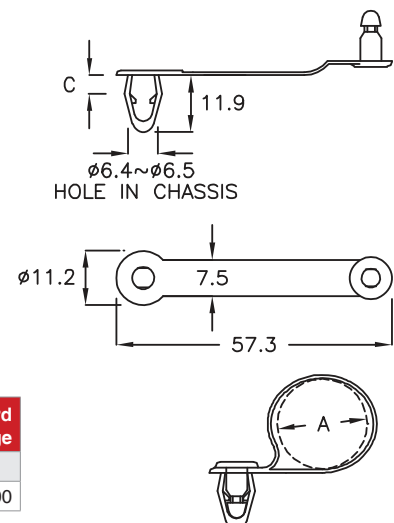

Part Number	Bundle Dia. "A", ø, mm [in.]	Chassis Thickness "C", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = ø6.4 - 6.5 mm [0.252 - 0.256 in.]			
PCMSP-PDT-10	ø9.5-11.0 [0.374-0.433]	0.8-2.4 [0.031-0.094]	500


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Side-Entry Single Cable Clamps

Anti-Spin Mount

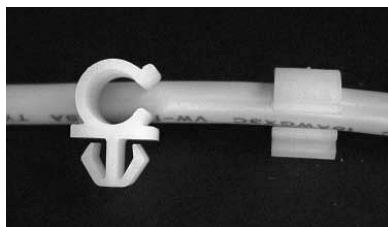


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount

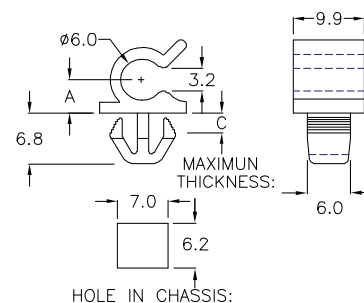

Part Number	Ref. "A", mm [in.]	Max. Panel Thickness "C", mm [in.]	Standard Package
PCMS-CH-06S	4.6 [0.181]	2.0 [0.079]	500

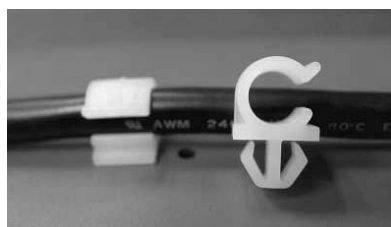


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Anti-Spin Mount



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
Max. Panel Thickness = 2.0 mm [0.079]						
PCMS-CH-09S	6.0 [0.236]	3.8 [0.150]	12.0 [0.472]	9.9 [0.390]	7.1 [0.280]	500
PCMS-CH-09A	7.1 [0.280]	4.8 [0.189]	11.6 [0.457]	8.0 [0.315]	5.4 [0.213]	
PCMS-CH-09C	6.5 [0.256]	3.8 [0.150]	13.5 [0.531]	9.9 [0.390]	7.0 [0.276]	




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural


Anti-Spin Mount



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
Max. Panel Thickness = 1.8 mm [0.071]			
PCMS-CH-09	10.5 [0.411]	5.6 [0.220]	200

Plastic Single Cable Clips


Snap-in Arrowhead Mount

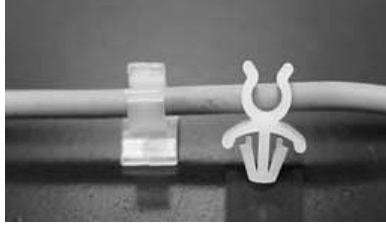


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

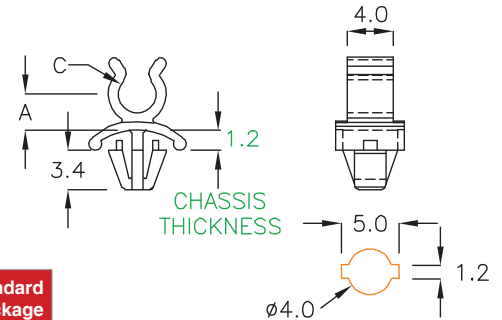


Part Number	Ref. "A", mm [in.]	Wire Dia. "C", ø, mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = See Drawing Chassis Thickness = 1.2 mm [0.047 in.]			
PCMSP-CS-01C	3.2 [0.126]	ø3.3 [0.130]	2000

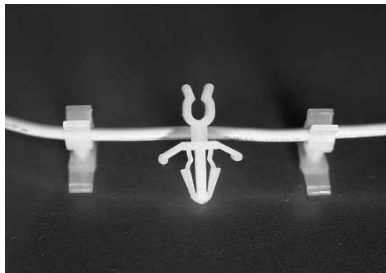

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

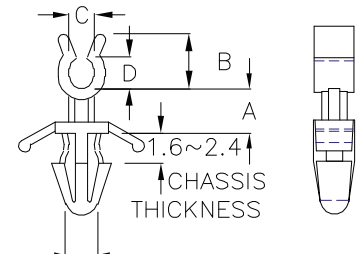

HOLE IN CHASSIS: ø4.0


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = ø4.0 mm [0.157 in.] Chassis Thickness = 1.6 - 2.4 mm [0.063 - 0.094 in.]						
PCMSP-CS-04A	4.0 [0.157]	5.0 [0.197]	2.3 [0.091]	2.9 [0.114]	4.9 [0.193]	1000
PCMSP-CS-04C	4.5 [0.177]	5.0 [0.197]	2.0 [0.079]	2.0 [0.079]	4.8 [0.189]	



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

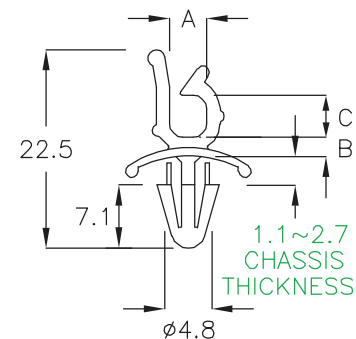

HOLE IN CHASSIS

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = ø4.8 mm [0.189 in.] Chassis Thickness = 1.1 - 2.7 mm [0.043 - 0.106 in.]				
PCMSP-TA-5	4.2 [0.165]	2.5 [0.098]	4.7 [0.185]	1000


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Single Cable Clamps

Snap-in Mount

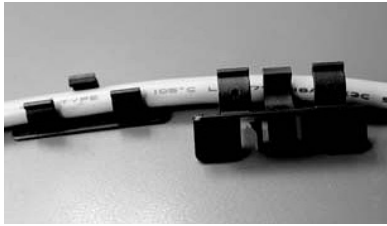


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

Anti-Spin Mount

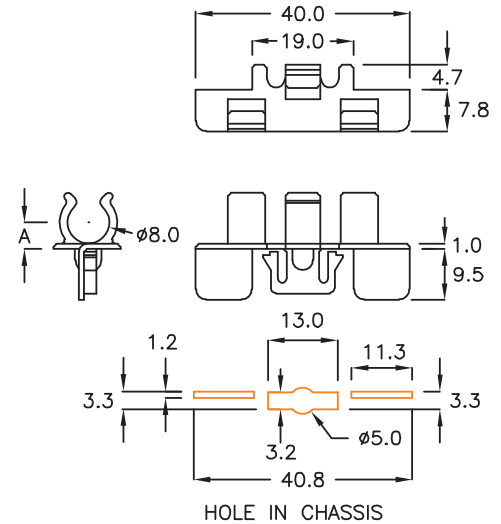


Part Number	Ref. "A", mm [in.]	Standard Package
To Fit Wire Dia. up to = $\phi 8.0$ mm [0.315 in.]		
PCMS-CHY-01	5.0 [0.197]	500



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

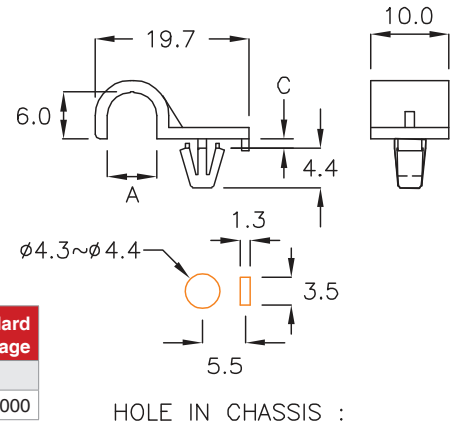

Part Number	Ref. "A", mm [in.]	Max. Chassis Thickness "C", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = See Drawing			
PCMS-CU-06A	6.4 [0.252]	1.1 [0.043]	1000

Plastic Dual Cable Clamps


Snap-in Arrowhead Mount



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

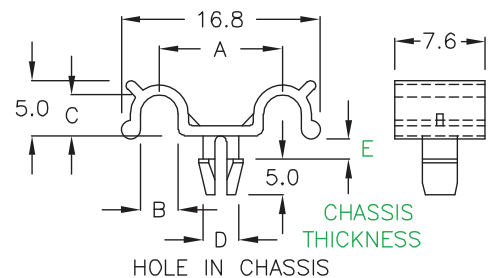

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Mounting Hole Dia. "D", mm [in.]	Chassis Thickness "E", mm [in.]	Standard Package
PCMS-CIC-01	10.4 [0.409]	3.2 [0.126]	3.4 [0.134]	3.2 [0.126]	1.6-1.8 [0.063-0.071]	1000

Plastic Dual Cable Clamps


Snap-in Arrowhead Mount




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

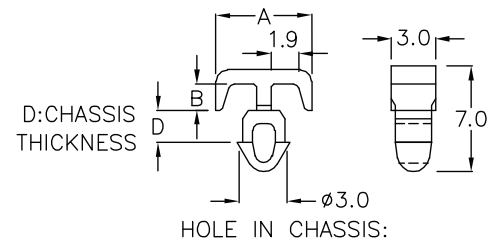


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Chassis Thickness "D", mm [in.]	Standard Package
Mount Hole Dia. in Chassis = $\phi 3.0$ mm [0.118 in.]				
PCMS-PCS-1A	6.6 [0.260]	1.8 [0.071]	2.0 [0.079]	2000

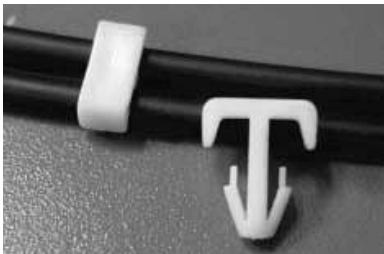


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

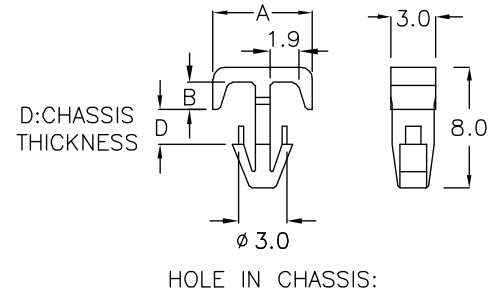


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Chassis Thickness "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\phi 3.0$ mm [0.118 in.]				
PCMS-PCS-3A	6.6 [0.260]	1.8 [0.071]	2.0 [0.079]	2000

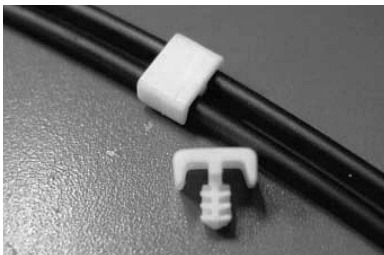

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

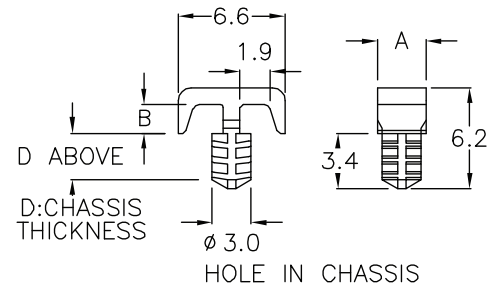


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Chassis Thickness "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\phi 3.0$ mm [0.118 in.]				
PCMS-PCS-4A	5.0 [0.197]	1.8 [0.071]	3.0 [0.118]	2000
PCMS-PCS-5A	3.0 [0.118]	1.8 [0.071]	3.0 [0.118]	

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis



Plastic Releasable Cable Clamps
Sanp-in Arrowhead Mount

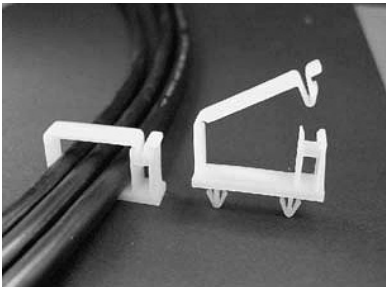


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

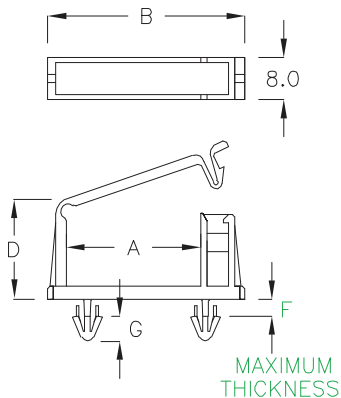



Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Mounting Hole Dia. "E", ø, mm [in.]	Max. Chassis Thickness "F", mm [in.]	Ref. "G", mm [in.]	Standard Package
PCMSP-CKK-03	19.1 [0.752]	31.0 [1.220]	16.0 [0.630]	18.6 [0.732]	ø4.0 [0.157]	3.0 [0.118]	4.9 [0.193]	500
PCMSP-CKK-03A	16.6 [0.654]	28.0 [1.102]	16.0 [0.630]	18.8 [0.740]	ø4.0 [0.157]	3.0 [0.118]	4.9 [0.193]	
PCMSP-CKK-03C	16.6 [0.654]	28.0 [1.102]	16.0 [0.630]	17.7 [0.697]	ø3.2 [0.126]	1.0 [0.039]	4.9 [0.193]	
PCMSP-CKK-04	24.1 [0.949]	34.3 [1.350]	20.0 [0.787]	17.9 [0.705]	ø4.0 [0.157]	3.0 [0.118]	4.9 [0.193]	
PCMSP-CKK-05	24.1 [0.949]	36.0 [1.417]	20.0 [0.787]	12.2 [0.480]	ø4.0 [0.157]	3.0 [0.118]	4.8 [0.189]	

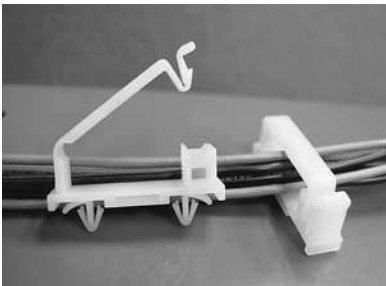

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

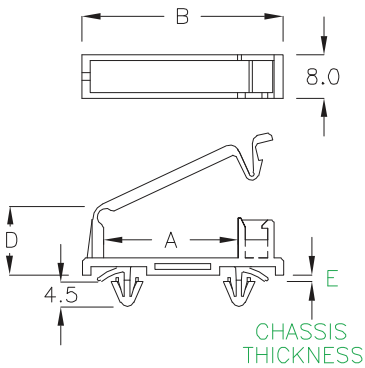

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Chassis Thickness "E", mm [in.]	Pkg.
Mounting Hole Dia. in chassis = ø4.0 mm [ø0.157 in.]						
PCMSP-CKK-05A	24.1 [0.949]	36.0 [1.417]	20.0 [0.787]	12.4 [0.488]	0.8-1.0 [0.031-0.039]	500
PCMSP-CKK-05C	24.1 [0.949]	36.0 [1.417]	20.0 [0.787]	12.4 [0.488]	0.8-2.0 [0.031-0.079]	
PCMSP-CKK-05D	28.1 [1.106]	40.0 [1.575]	20.0 [0.787]	13.3 [0.524]	0.8-1.0 [0.031-0.039]	


Plastic Releasable Cable Clamps
Snap-in Arrowhead Mount

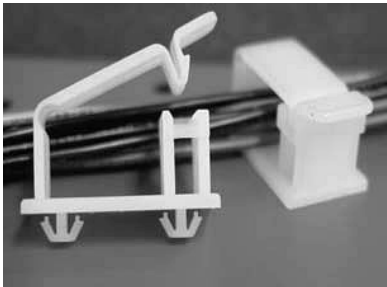


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

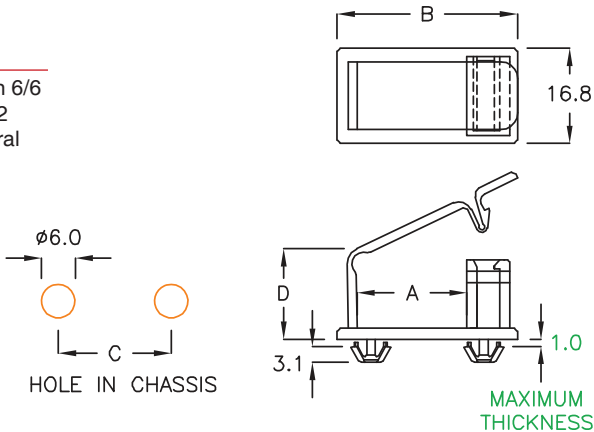

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = 6.0 mm [0.236 in.]					
PCMS-CKK-06	19.4 [0.764]	31.9 [1.256]	20.0 [0.787]	15.2 [0.598]	500

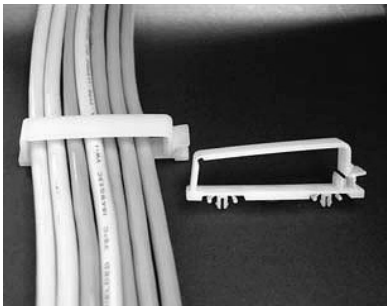

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Fig. 1


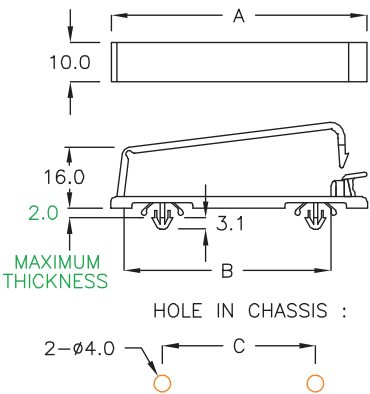


Fig. 2



Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Mounting Hole Dia. in Chassis = 4.0 mm [0.157 in.] Max. Chassis Thickness = 2.0 mm [0.079 in.]					
PCMS-FCC-40A	1	67.0 [2.638]	53.5 [2.106]	40.0 [1.575]	100
Mounting Hole Dia. in Chassis = 4.0 mm [0.157 in.] Max. Chassis Thickness = 2.0 mm [0.079 in.]					
PCMS-FCC-40D	2	67.0 [2.638]	53.5 [2.106]	40.0 [1.575]	100

Plastic Releasable Cable Clamps
Sanp-in Arrowhead Mount

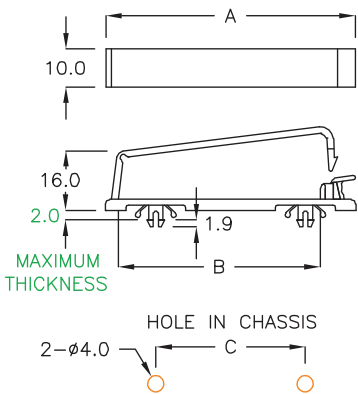

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Fig. 1



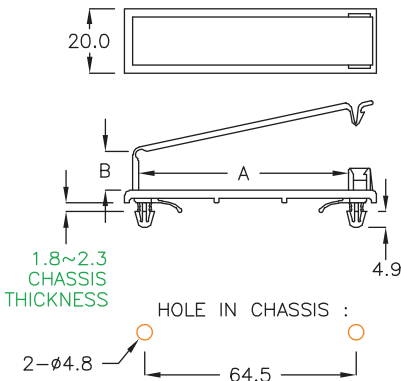


Fig. 2

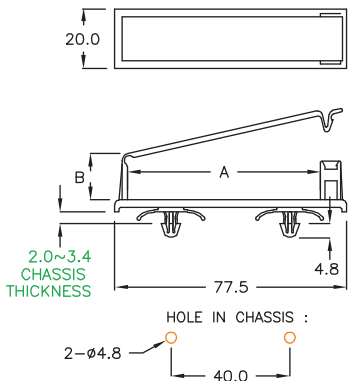


Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = ø4.8 mm [ø0.189 in.] Chassis Thickness = 1.8 - 2.3 mm [0.071 - 0.091 in.]				
PCMSP-FAA-50	1	64.0 [2.520]	7.0 [0.276]	100
PCMSP-FAA-51		64.0 [2.520]	13.7 [0.539]	
Mounting Hole Dia. in chassis = ø4.8 mm [ø0.189 in.] Chassis Thickness = 2.0 - 3.4 mm [0.079 - 0.134 in.]				
PCMSP-FAA-51A	2	65.1 [2.563]	15.4 [0.606]	100

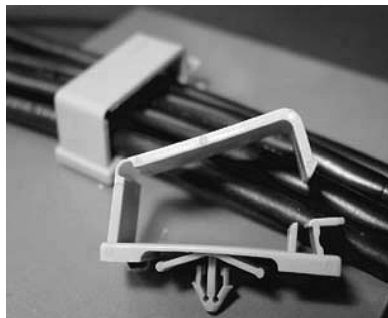

RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

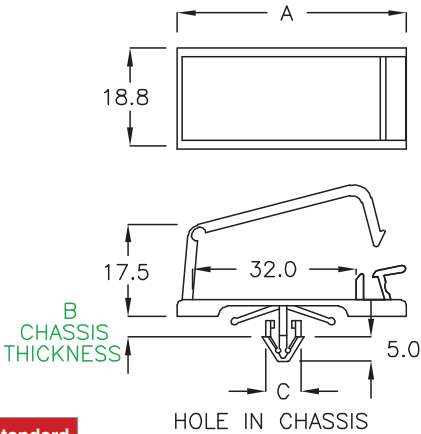

Part Number	Ref. "A", mm [in.]	Chassis Thickness "B", mm [in.]	Mounting Hole Dia. "C", mm [in.]	Standard Package
PCMSP-FWH-01	44.8 [1.764]	1.8-3.2 [0.071-0.126]	6.4 [0.252]	200


Plastic Wire Clamps
Snap-in Arrowhead Mount

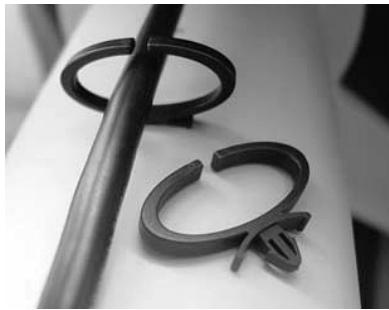

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

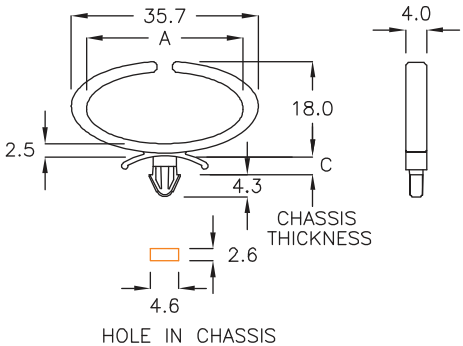


Part Number	Ref. "A", mm [in.]	Chassis Thickness "C", mm [in.]	Standard Package
PCMS-CHP-2A	29.9 [1.177]	1.2-2.8 [0.047-0.110]	500



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

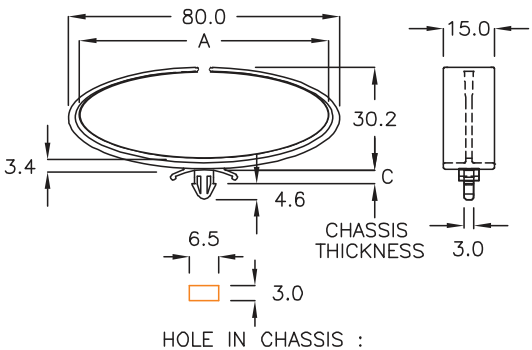


Part Number	Ref. "A", mm [in.]	Chassis Thickness "C", mm [in.]	Standard Package
PCMS-CHP-8A	73.5 [2.894]	2.5-3.5 [0.098-0.138]	100



RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

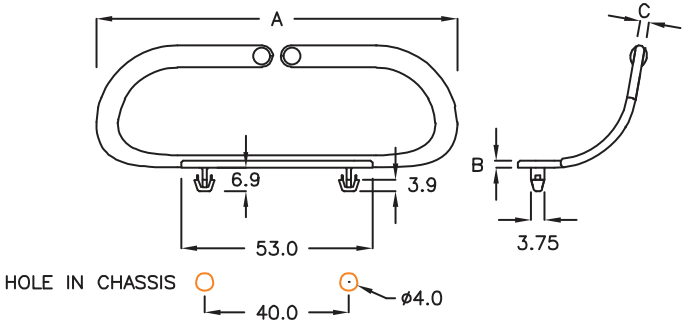

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Chassis Thickness = 3.0 mm [0.118 in.]				
PCMS-CKF-40	100.0 [3.937]	2.0 [0.079]	2.5 [0.098]	100


Plastic Wire Clamps
Snap-in Arrowhead Mount

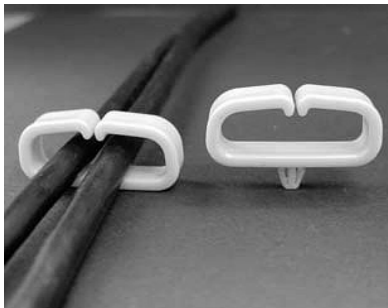

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

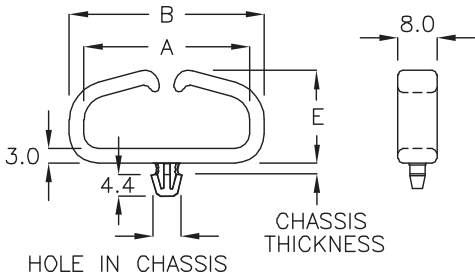


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "E", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\varnothing 4.9 - 5.0$ mm [0.193 - 0.197 in.] Chassis Thickness = 1.8 - 2.0 mm [0.071 - 0.079 in.]				
PCMSP-CKQ-40	33.8 [1.331]	39.8 [1.567]	18.5 [0.728]	500
PCMSP-CKQ-44	41.6 [1.638]	48.8 [1.921]	23.4 [0.921]	200
PCMSP-CKQ-55	49.0 [1.929]	55.0 [2.165]	18.3 [0.720]	




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

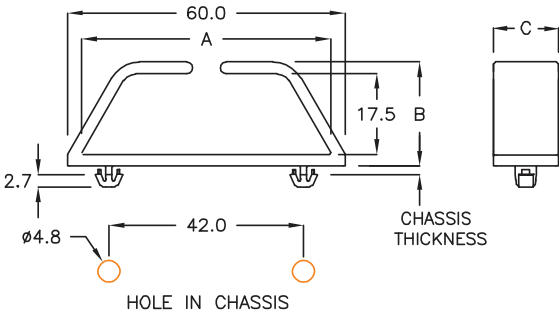

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\varnothing 4.8$ mm [0.189 in.] Chassis Thickness = 1.5 mm [0.059 in.]				
PCMSP-CKQ-60	53.8 [2.118]	22.5 [0.886]	14.0 [0.551]	200

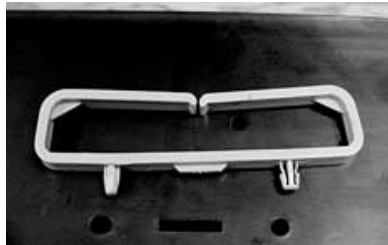


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = $\varnothing 5.0$ mm [0.197 in.] Chassis Thickness = 1.0 mm [0.039 in.] OR 3.0 mm [0.118 in.] (See Drawing for Details)				
PCMSP-CKQ-98	98.0 [3.858]	24.0 [0.945]	8.0 [0.315]	100


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

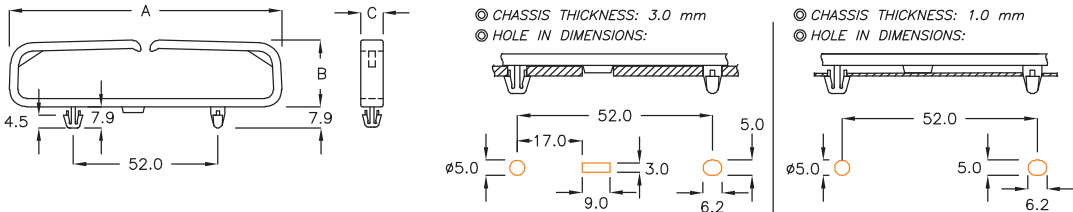


Plastic Flat Cable Clamps
Snap-in Arrowhead Mount

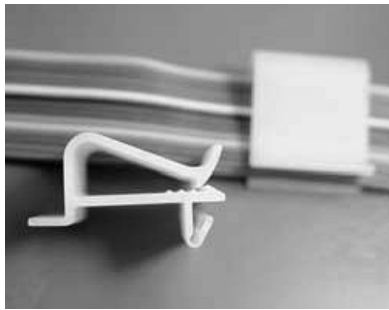


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

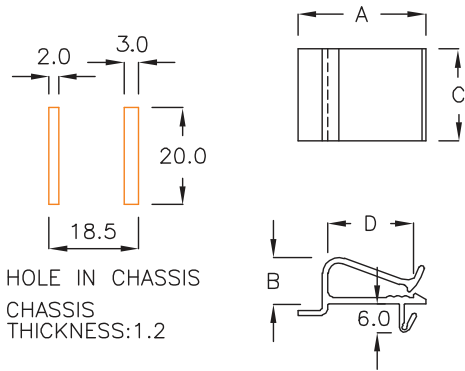

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Standard Package
Chassis Thickness = 1.2 mm [0.047 in.]					
PCMSP-LFC-01	26.4 [1.039]	9.6 [0.378]	19.0 [0.748]	17.6 [0.693]	200

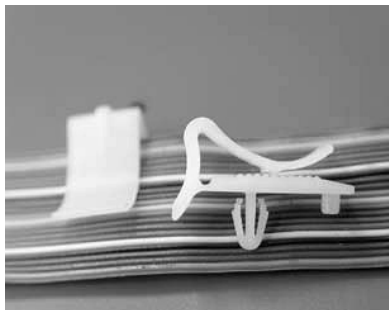

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Fig. 1



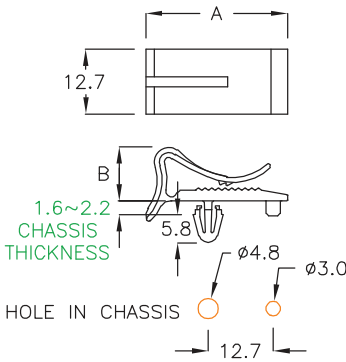


Fig. 2

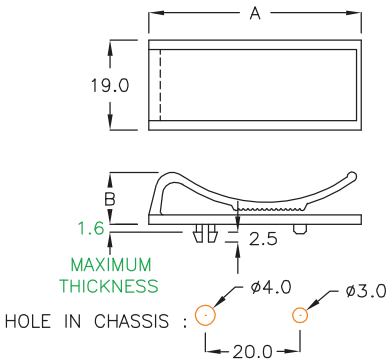

Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
Chassis Thickness = 1.6 - 2.2 mm [0.063 - 0.087 in.]				
PCMSP-FC-27N	1	27.8 [1.094]	10.5 [0.413]	500
Max. Chassis Thickness = 1.6 mm [0.063 in.]				
PCMSP-FC-45N	2	45.0 [1.772]	10.9 [0.429]	200


Plastic Releasable Flat Cable Clamps
Snap-in Arrowhead Mount

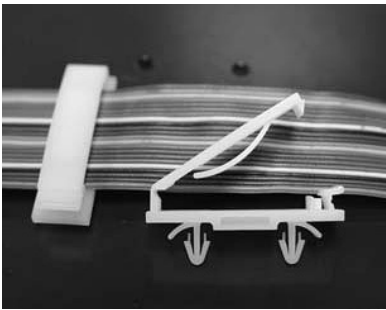


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

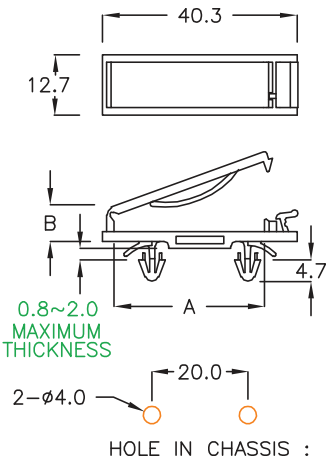


Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Standard Package
Mounting Hole Dia. in chassis = ø4.0 mm [0.157 in.] Chassis Thickness = 0.8 - 2.0 mm [0.031 - 0.079 in.]			
PCMSP-FCC-20	31.3 [1.232]	7.1 [0.280]	500

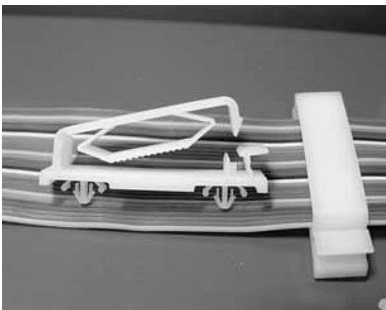

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

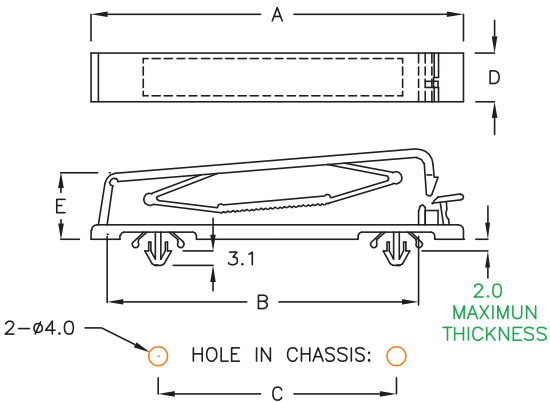

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Ref. "E", mm [in.]	Suitable Cable	Standard Package
Mounting Hole Dia. in chassis = ø4.0 mm [0.157 in.] Max. Chassis Thickness = 2.0 mm [0.079 in.]							
PCMSP-FCC-15A	32.6 [1.283]	14.4 [0.567]	15.0 [0.591]	9.1 [0.358]	13.7 [0.539]	10 PIN	200
PCMSP-FCC-25A	39.6 [1.559]	25.0 [0.984]	20.0 [0.787]	13.3 [0.524]	13.0 [0.512]	20 PIN	
PCMSP-FCC-30A	55.0 [2.165]	39.6 [1.559]	35.0 [1.378]	12.5 [0.492]	13.0 [0.512]	30 PIN	100
PCMSP-FCC-40B	67.0 [2.638]	54.0 [2.126]	40.0 [1.575]	10.0 [0.394]	16.2 [0.638]	40 PIN	
PCMSP-FCC-50A	77.6 [3.055]	64.6 [2.543]	49.7 [1.957]	10.1 [0.398]	13.6 [0.535]	50 PIN	
PCMSP-FCC-50C	77.0 [3.031]	64.3 [2.531]	49.7 [1.957]	10.0 [0.394]	12.8 [0.504]	50 PIN	

Plastic Twist Lock


Blind Hole Mount

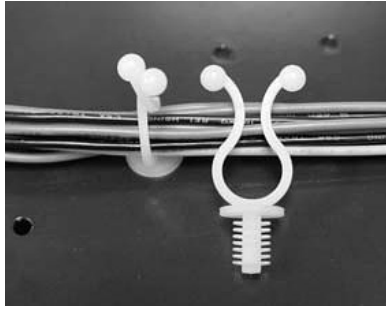

RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

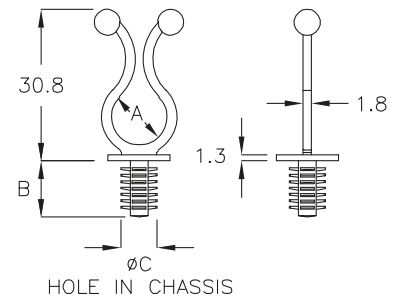

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Mounting Hole Dia. "C", ø, mm [in.]	Standard Package
PCMSP-TG12-03	11.8 [0.465]	ø10.5 [0.413]	11.5 [0.453]	ø6.4 [0.250]	500

Plastic Releasable Wire Saddle

Quarter-Turn Mount

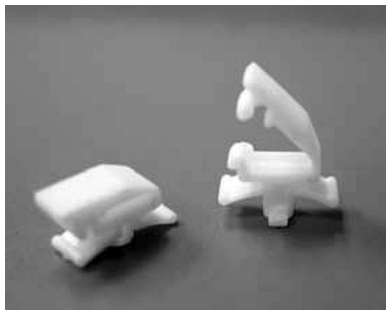


RoHS COMPLIANT


Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Quarter Turn Mount:
 Insert, press down and turn 90°

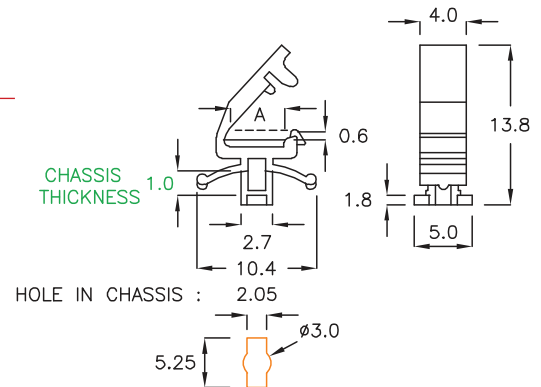

Part Number	Ref. "A", mm [in.]	Standard Package
Chassis Thickness = 1.0 mm [0.039 in.]		
PCMSP-CKA-2A	4.0 [0.157]	2000

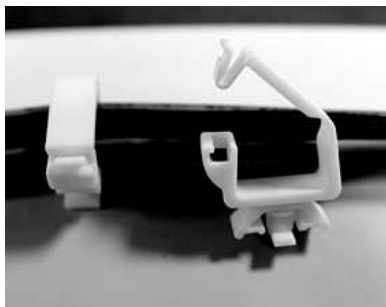


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Quarter Turn Mount:
 Insert, press down and turn 90°

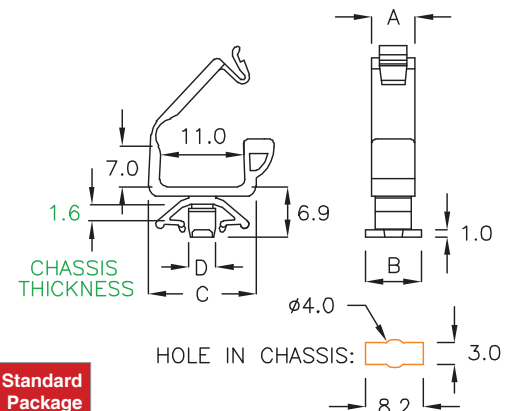

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", ø, mm [in.]	Standard Package
Chassis Thickness = 1.6 mm [0.063 in.]					
PCMSP-CKB-7A	6.0 [0.236]	7.8 [0.307]	15.0 [0.591]	ø3.7 [0.146]	500


all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Single Cable Clamp

Quarter-Turn Mount

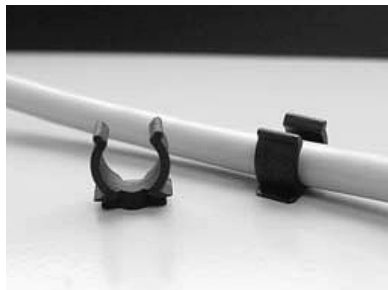


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

Quarter Turn Mount:
 Insert, press down and turn 90°

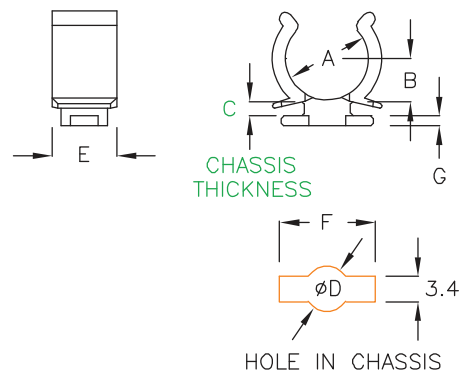

Part Number	Max. Wire Dia. "A", ϕ , mm [in.]	Ref. "B", mm [in.]	Chassis Thickness "C", mm [in.]	Dia. "D", ϕ , mm [in.]	Ref. "E", mm [in.]	Ref. "F", mm [in.]	Ref. "G", mm [in.]	Standard Package
PCMSP-CHQ-03	$\phi 3.1$ [0.122]	3.2 [0.126]	1.2 [0.047]	$\phi 4.0$ [0.157]	5.6 [0.220]	10.1 [0.398]	1.4 [0.055]	2000
PCMSP-CHQ-07	$\phi 7.3$ [0.287]	4.2 [0.165]	1.2 [0.047]	$\phi 5.0$ [0.197]	7.0 [0.276]	10.4 [0.409]	1.3 [0.051]	
PCMSP-CHQ-08	$\phi 8.0$ [0.315]	4.3 [0.169]	1.2 [0.047]	$\phi 5.0$ [0.197]	7.0 [0.276]	10.4 [0.409]	1.3 [0.051]	
PCMSP-CHQ-09	$\phi 8.5$ [0.335]	4.7 [0.185]	1.2 [0.047]	$\phi 5.0$ [0.197]	7.0 [0.276]	10.4 [0.409]	1.0 [0.039]	1000
PCMSP-CHQ-11	$\phi 10.7$ [0.421]	5.3 [0.209]	1.3 [0.051]	$\phi 5.1$ [0.201]	7.0 [0.276]	10.4 [0.409]	1.3 [0.051]	

Plastic J-Style Single Cable Clamps

Screw Secured Mount



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Fig. 1


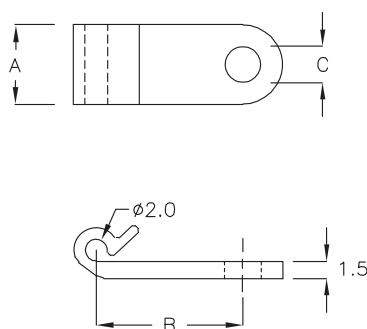


Fig. 2



Part Number	Figure	Close/Bundle Dia. "D", ϕ , mm [in.]	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Mounting Hole Dia. "C", ϕ , mm [in.]	Standard Package
PCMSW-PC-1J	1	$\phi 2.0$ [0.079]	7.0 [0.276]	12.8 [0.504]	$\phi 3.2$ [0.126]	1000
PCMSW-PC-1D	2	$\phi 2.7$ [0.106]	6.6 [0.260]	6.7 [0.264]	$\phi 3.5$ [0.138]	2000
PCMSW-PC-1A		$\phi 3.4$ [0.134]	6.5 [0.256]	6.7 [0.264]	$\phi 3.4$ [0.134]	
PCMSW-PC-2A		$\phi 5.0$ [0.197]	8.5 [0.335]	11.4 [0.449]	$\phi 4.4$ [0.173]	1000
PCMSW-PC-2D		$\phi 5.7$ [0.224]	8.6 [0.339]	13.8 [0.543]	$\phi 4.4$ [0.173]	

all dimension units in millimeter (mm) unless noted otherwise

Plastic Single Cable Clamps
Screw Secured Mount

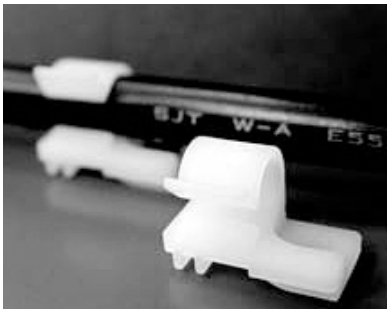


Fig. 1


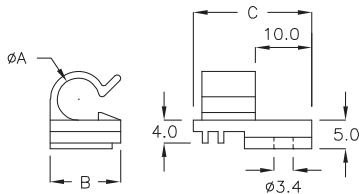


Fig. 2

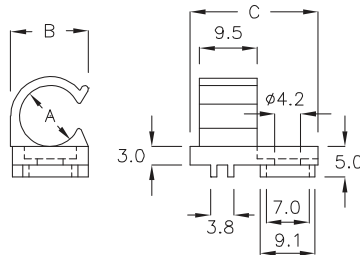

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural


Part Number	Figure	Wire Dia. "A", ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C",m m [in.]	Mounting Hole Dia., ø, mm [in.]	Standard Package
PCMSW-CHF-7	1	ø7.5 [0.295]	12.5 [0.492]	21.0 [0.827]	ø3.4 [0.134]	500
PCMSW-CHF-7A	2	ø10.0 [0.394]	12.8 [0.504]	21.0 [0.827]	ø4.2 [0.165]	



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

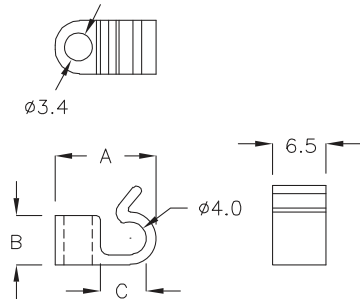

Part Number	Wire Dia., mm [in.]	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Mounting Hole dia., mm [in.]	Standard Package
PCMSW-CHF-7	4.0 [0.157]	12.3 [0.484]	6.0 [0.236]	5.6 [0.220]	3.4 [0.134]	1000

Plastic Round Cable Clamp




Screw Secured Mount




RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
 Black



Part Number	Close/Bundle Dia. "D", ø, mm [in.]	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Mounting Hole Dia. "C", ø, mm [in.]	Standard Package
PCMSW-PC-1	ø3.6 [0.142]	13.5 [0.531]	9.0 [0.354]	ø5.4 [0.213]	1000
PCMSW-PC-1C	ø3.0 [0.118]	9.5 [0.374]	8.3 [0.327]	ø4.4 [0.173]	2000
PCMSW-PC-1S	ø3.1 [0.122]	6.5 [0.256]	6.7 [0.264]	ø3.5 [0.138]	
PCMSW-PC-2	ø5.0 [0.197]	10.2 [0.402]	11.5 [0.453]	ø4.0 [0.157]	1000
PCMSW-PC-2K	ø5.7 [0.224]	12.7 [0.500]	10.7 [0.421]	ø5.2 [0.205]	
PCMSW-PC-2L	ø7.3 [0.287]	9.6 [0.378]	12.1 [0.476]	ø5.0 [0.197]	
PCMSW-PC-2M	ø6.1 [0.240]	9.8 [0.386]	12.1 [0.476]	ø5.1 [0.201]	
PCMSW-PC-2S	ø6.9 [0.272]	9.8 [0.386]	12.0 [0.472]	ø5.1 [0.201]	
PCMSW-PC-3	ø5.6 [0.220]	10.0 [0.394]	11.9 [0.469]	ø4.4 [0.173]	500
PCMSW-PC-3M	ø5.0 [0.197]	8.3 [0.327]	9.8 [0.386]	ø4.0 [0.157]	
PCMSW-PC-4	ø8.3 [0.327]	9.9 [0.390]	12.1 [0.476]	ø4.1 [0.161]	
PCMSW-PC-5	ø8.8 [0.346]	12.4 [0.488]	13.4 [0.528]	ø5.0 [0.197]	
PCMSW-PC-5C	ø8.3 [0.327]	9.5 [0.374]	12.0 [0.472]	ø3.2 [0.126]	
PCMSW-PC-6	ø11.4 [0.449]	13.5 [0.531]	16.5 [0.650]	ø5.3 [0.207]	



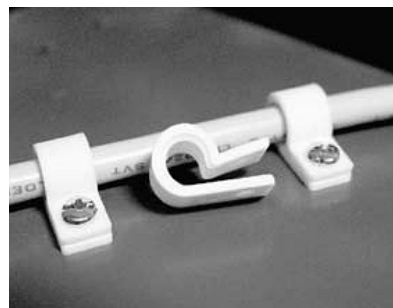


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
 94V-0 (Special Order)
Color: Natural

Heavy Duty Design



Part Number	Close/Bundle Dia. "D", ø, mm [in.]	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Mounting Hole Dia. "C", ø, mm [in.]	Standard Package
PCMSW-PC-3L	ø5.5 [0.217]	10.0 [0.394]	10.0 [0.394]	ø4.4 [0.173]	500
PCMSW-PC-3C	ø6.9 [0.272]	9.8 [0.386]	11.3 [0.445]	ø4.2 [0.165]	
PCMSW-PC-2C	ø7.7 [0.303]	9.8 [0.386]	12.0 [0.472]	ø4.2 [0.165]	
PCMSW-PC-6M	ø11.0 [0.433]	10.0 [0.394]	15.1 [0.594]	ø4.0 [0.157]	

Plastic Flat Cable Clamp
Screw Secured Mount



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-0
94V-2 (PCMSW-PL-1)
Color: Natural

Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Mounting Hole Dia. "C", ø, mm [in.]	Standard Package
PCMSW-PL-1	1	10.0 [0.394]	13.4 [0.528]	ø4.0 [0.157]	500
PCMSW-PL-1A	2	10.1 [0.398]	11.0 [0.433]	ø5.0 [0.197]	
PCMSW-PL-3	3	10.0 [0.394]	16.2 [0.636]	ø4.5 [0.177]	
PCMSW-PL-4	4	10.0 [0.394]	17.0 [0.669]	ø4.5 [0.177]	

Fig. 1

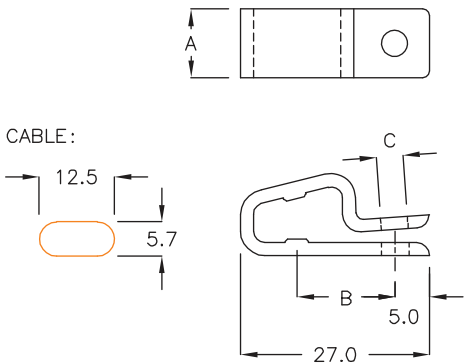


Fig. 2

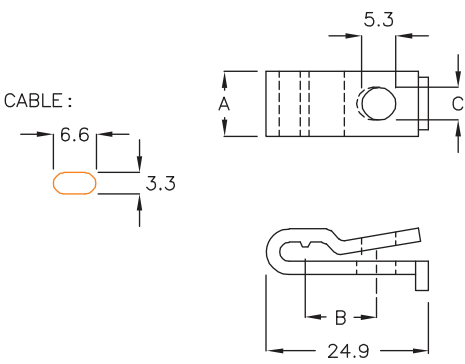


Fig. 3


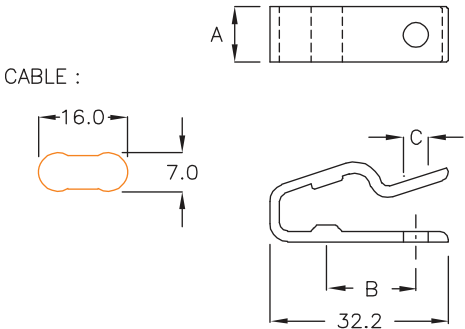


Fig. 4



Plastic Strain Relief Clamp
Screw Secured Mount

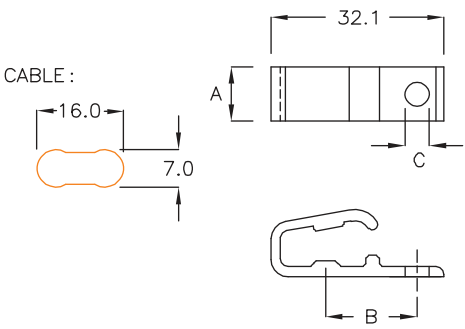

RoHS COMPLIANT

Specifications:

Material:	Nylon 6/6
UL Rating:	94V-2
Color:	Natural (PCMSW-PCT-1)
	Black (PCMSW-PCT-2)
	Black (PCMSW-PCT-3)

Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Mounting Hole Dia., ø, mm [in.]	Standard Package
PCMSW-PCT-1	1	32.0 [1.260]	22.0 [0.866]	10.0 [0.394]	ø4.2 [0.165]	500
PCMSW-PCT-2	2	25.0 [0.984]	17.0 [0.669]	10.0 [0.394]	ø3.5 [0.138]	
PCMSW-PCT-3	3	25.0 [0.984]	17.0 [0.669]	10.0 [0.394]	ø3.7 [0.146]	

Fig. 1




Fig. 2


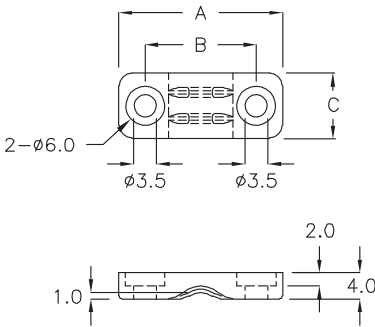


Fig. 3

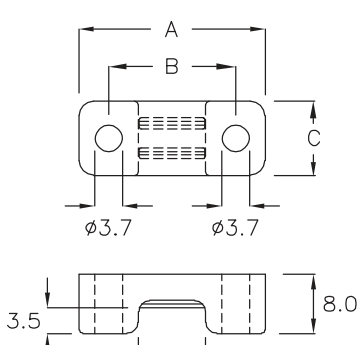

Plastic Wire Saddles
Screw Secured Mount



Fig. 1


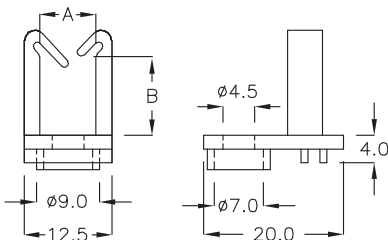


Fig. 2



RoHS COMPLIANT


Specifications:

Material:	Nylon 6/6
UL Rating:	94V-2
Color:	Natural

Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Mounting Hole Dia., ø, mm [in.]	Standard Package
PCMSW-CHF-11E	1	8.0 [0.315]	11.2 [0.441]	ø4.5 [0.177]	500
PCMSW-CNF-11	2	11.0 [0.433]	18.5 [0.728]	ø3.8 [0.150]	

Plastic Twist Locks


Single End/Dual End

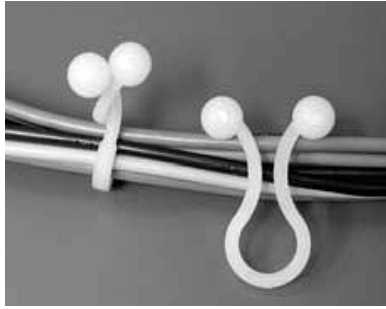


RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
UL Listed: See  Logo




Part Number		Ref. "A", mm [in.]	Close/Bundle Dia, ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Pkg.
PCM-A-5		5.0 [0.197]	ø4.2 [0.165]	8.5 [0.335]	22.0 [0.866]	1.8 [0.071]	1000
PCM-A-8		8.3 [0.327]	ø7.0 [0.276]	12.0 [0.472]	26.2 [1.031]	2.3 [0.091]	
PCM-A-11		11.1 [0.437]	ø9.7 [0.382]	15.2 [0.598]	30.0 [1.181]	2.3 [0.091]	
PCM-A-13		13.2 [0.520]	ø11.5 [0.453]	17.2 [0.677]	32.5 [1.280]	2.3 [0.091]	
PCM-A-14A		14.7 [0.579]	ø13.2 [0.520]	18.7 [0.736]	35.0 [1.378]	2.0 [0.079]	
PCM-A-15		14.8 [0.583]	ø13.0 [0.512]	18.8 [0.740]	32.6 [1.283]	2.4 [0.094]	
PCM-A-15A		15.0 [0.591]	ø14.0 [0.551]	19.0 [0.748]	33.7 [1.327]	1.8 [0.071]	500
PCM-A-18		19.2 [0.756]	ø16.3 [0.642]	23.3 [0.917]	38.5 [1.516]	2.0 [0.079]	
PCM-A-19		18.9 [0.744]	ø17.3 [0.681]	22.9 [0.902]	35.0 [1.378]	2.2 [0.087]	
PCM-A-22		22.0 [0.866]	ø20.0 [0.787]	27.5 [1.083]	42.0 [1.654]	2.0 [0.079]	
PCM-A-28		29.0 [1.142]	ø26.8 [1.055]	33.5 [1.319]	55.5 [2.185]	2.0 [0.079]	
PCM-A-30		29.6 [1.165]	ø27.0 [1.063]	33.7 [1.327]	55.5 [2.185]	2.0 [0.079]	

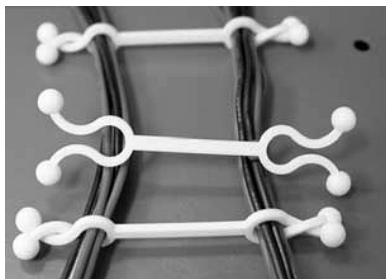

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
UL Listed: See  Logo

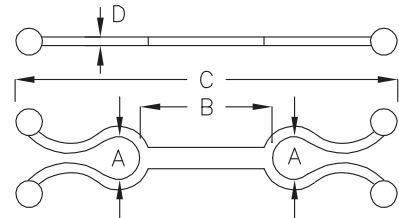

Part Number		Ref. "A", mm [in.]	Close/Bundle Dia, ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Pkg.
PCM-2A-7		7.0 [0.276]	ø5.9 [0.232]	32.7 [1.287]	73.8 [2.906]	1.9 [0.075]	500
PCM-2A-7L		7.0 [0.276]	ø5.8 [0.228]	60.0 [2.362]	101.5 [3.996]	2.0 [0.079]	
PCM-2A-8		8.0 [0.315]	ø6.5 [0.256]	10.2 [0.402]	56.5 [2.224]	1.9 [0.075]	
PCM-2A-10		10.0 [0.394]	ø8.6 [0.339]	30.4 [1.197]	82.2 [3.236]	2.0 [0.079]	
PCM-2A-10A		10.0 [0.394]	ø8.6 [0.339]	30.0 [1.181]	82.2 [3.236]	3.0 [0.118]	
PCM-2A-13S		14.8 [0.583]	ø12.2 [0.480]	85.0 [3.346]	147.8 [5.819]	2.0 [0.079]	200

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

Plastic Cable Clips Freestanding



Fig. 1





Fig. 2



Please Refer to Fig.1 For the Following Table

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close Dia. "D", ø, mm [in.]	Standard Package
PCM-FCM-20	14.2 [0.559]	4.1 [0.161]	6.0 [0.236]	ø4.4 [0.173]	1000
PCM-FCM-20C	8.6 [0.339]	2.3 [0.091]	5.0 [0.197]	ø2.1 [0.083]	

Please Refer to Fig.2 For the Following Table

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close Dia. "D", ø, mm [in.]	Close Dia. "E", ø, mm [in.]	Standard Package
PCM-FCM-20A	19.0 [0.748]	4.1 [0.161]	4.1 [0.161]	ø4.2 [0.165]	ø4.2 [0.165]	1000
PCM-FCM-20F	22.9 [0.902]	5.1 [0.201]	5.1 [0.201]	ø5.2 [0.205]	ø5.2 [0.205]	
PCM-FCM-20H	26.5 [1.043]	6.2 [0.244]	5.6 [0.220]	ø4.9 [0.193]	ø6.2 [0.244]	

Plastic High Voltage Insulator Rings Freestanding

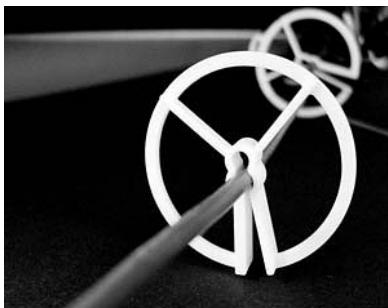


Fig. 1





Fig. 2



Please Refer to Fig.1 For the Following Table

Part Number	Cable Dia., ø, mm [in.]	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", ø, mm [in.]	Standard Package
PCM-HV-1	ø4.5-5.2 [0.177-0.205]	22.0 [0.866]	26.7 [1.051]	ø49.2 [1.937]	100
PCM-HV-1S	ø3.7-4.2 [0.146-0.165]	22.0 [0.866]	26.7 [1.051]	ø49.2 [1.937]	
PCM-HV-3	ø4.5-5.3 [0.177-0.209]	29.9 [1.177]	34.9 [1.374]	ø64.0 [2.520]	

Please Refer to Fig.2 For the Following Table


Part Number	Cable Dia., ø, mm [in.]	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", ø, mm [in.]	Ref. "D", mm [in.]	Pkg.
PCM-HV-1TS	ø4.2-4.7 [0.165-0.185]	23.4 [0.921]	28.2 [1.110]	ø49.3 [1.941]	12.0 [0.472]	100
PCM-HV-3T	ø4.5-4.3 [0.177-0.169]	32.5 [1.280]	37.3 [1.469]	ø67.5 [2.657]	10.0 [0.394]	

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
UL Listed: See  Logo

Plastic Flat Cable Tie Holders
Adhesive Mount, Optional Screw Mount

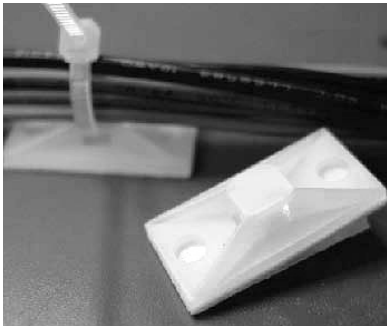

RoHS COMPLIANT

Specifications:

- Material: Nylon 6/6
- UL Rating: 94V-2
- Color: Natural
- Adhesive: 3M™ Form Tape
- Screw*: M3 (Except Parts in Fig. 1)

Cable Ties on Page 113
*Screws Not Included

Part Number	Figure	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Max. Cable Tie Thickness "D", mm [in.]	Max. Cable Tie Width "T", mm [in.]	Standard Package
PCMAH-AB-2S	1	13.0 [0.512]	13.0 [0.512]	3.9 [0.154]	1.3 [0.051]	2.8 [0.110]	1000
PCMAH-AB-2		19.0 [0.748]	19.0 [0.748]	3.9 [0.154]	1.3 [0.051]	3.4 [0.134]	500
PCMAH-AB-3S	2	20.0 [0.787]	20.0 [0.787]	5.5 [0.217]	1.6 [0.063]	4.4 [0.173]	500
PCMAH-AB-3		28.3 [1.114]	28.3 [1.114]	5.9 [0.232]	1.8 [0.071]	5.0 [0.197]	200
PCMAH-AB-3P	3	24.0 [0.945]	12.0 [0.472]	4.5 [0.177]	2.0 [0.077]	4.0 [0.157]	500

Fig 1

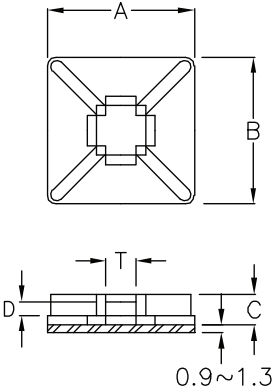


Fig 2



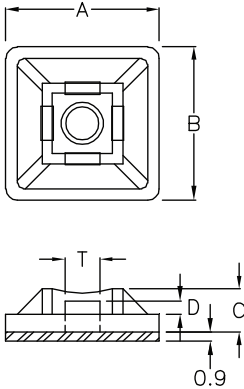


Fig 3

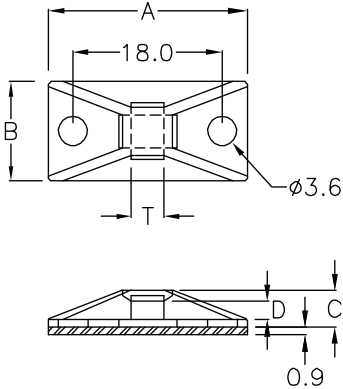

Plastic Flat Cable Tie Holders
Adhesive Mount, Optional Screw Mount

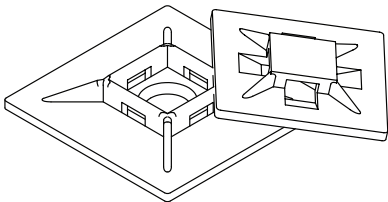

RoHS COMPLIANT

Specifications:

- Material: Nylon 6/6
- UL Rating: 94V-2
- Color: Natural
- Adhesive: Generic Form Tape
3M™ VHB Tape
- Screw*: M3

Cable Ties on Page 113
*Screws Not Included

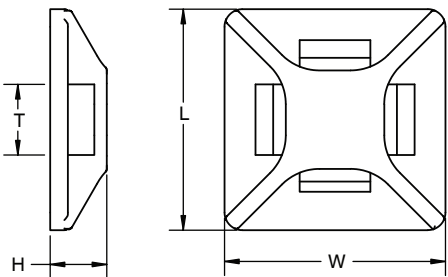


Fig. 1

Part Number	Figure	Length "L", mm [in.]	Width "W", mm [in.]	Height, mm [in.]	Cable Tie Width mm [in.]	Std. Package
PFTH-125	Fig. 1	12.5 [0.492]	12.5 [0.492]	3.2 [0.126]	3.2 [0.126]	1000
PFTH-180	Fig. 2	18.0 [0.709]	18.0 [0.709]	4.5 [0.177]	4.5 [0.177]	
PFTH-190	Fig. 3	19.0 [0.748]	19.0 [0.748]	3.9 [0.154]	4.5 [0.177]	
PFTH-210	Fig. 4	21.0 [0.827]	21.0 [0.827]	3.5 [0.138]	4.1 [0.161]	
PFTH-280	Fig. 3	28.0 [1.102]	28.0 [1.102]	5.3 [0.209]	5.0 [0.197]	
PFTH-292	N/A	29.2 [1.150]	29.2 [1.150]	5.4 [0.213]	5.0 [0.197]	

Screw Mounting Information

Part Number	Mounting Hole Diameter, mm [in.]
PFTH-125	N/A
PFTH-180	5.0 [0.197]
PFTH-190	3.2 [0.126]
PFTH-210	N/A
PFTH-280	5.0 [0.197]
PFTH-292	5.0 [0.197]

Fig. 2




Fig. 3






Fig. 4



Plastic Cable Tie Holders
Snap-In Arrowhead Mount

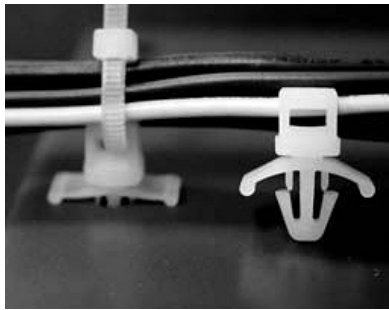



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Cable Ties on Page 113

Part Number	Standard Package
Chassis Thickness = 0.8 - 2.0 mm [0.031 - 0.079 in.]	
Mounting Hold Dia. = $\phi 4.8$ mm [0.189 in.]	
To Fit Cable Tie Max. Width x Thickness = 3.9 x 1.7 mm [0.154 x 0.067 in.]	
PCMSP-YL-1	1000

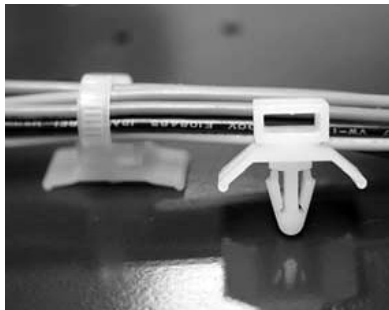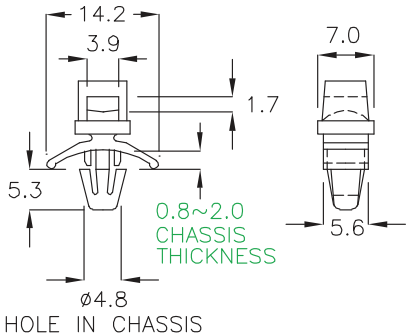



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Cable Ties on Page 113

Part Number	Standard Package
Chassis Thickness = 1.6 mm [0.063 in.]	
Mounting Hold Dia. = $\phi 6.5$ mm [0.256 in.]	
To Fit Cable Tie Max. Width x Thickness = 8.3 x 2.7 mm [0.327 x 0.106 in.]	
PCMSP-YL-6	500

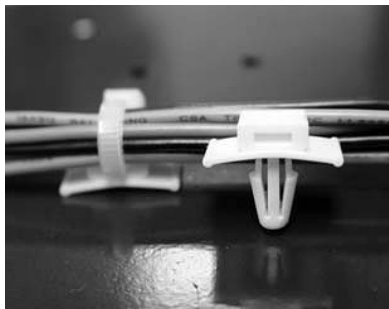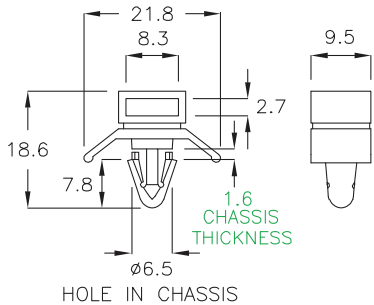


RoHS COMPLIANT

Specifications:


Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural

Cable Ties on Page 113

Part Number	Standard Package
Chassis Thickness = 3.2 mm [0.126 in.]	
Mounting Hold Dia. = $\phi 6.2$ mm [0.244 in.]	
To Fit Cable Tie Max. Width x Thickness = 5.4 x 1.5 mm [0.213 x 0.059 in.]	
PCMSP-YLA-1	500

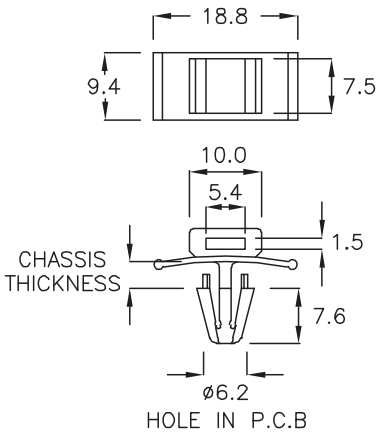

Plastic Cable Tie Holders
Screw Secured Mount/Quarter Turn Mount

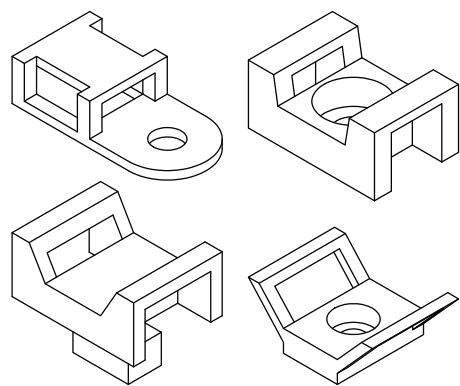

RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
Black (Special Order)

Cable Ties on Page 113

Screw Mounting Information

Part Number	Figure	Height "H", mm [in.]	Length "L", mm [in.]	Width "W", mm [in.]	Cable Tie Width mm [in.]	Pkg.
PTH-A	Fig. 1	5.0 [0.197]	19.0 [0.748]	9.5 [0.374]	5.0 [0.197]	1000
PTH-B	Fig. 2	7.0 [0.276]	15.0 [0.591]	10.0 [0.394]	5.0 [0.197]	
PTH-C	Fig. 2	9.0 [0.354]	23.0 [0.906]	16.0 [0.630]	9.0 [0.354]	
PTH-D	Fig. 3	17.5 [0.689]	23.0 [0.906]	13.8 [0.543]	9.5 [0.374]	
PTH-E	Fig. 3	11.6 [0.457]	30.0 [1.181]	14.7 [0.579]	9.3 [0.366]	
PTH-F	Fig. 4	9.7 [0.382]	21.3 [0.839]	15.5 [0.610]	7.8 [0.307]	

Part Number	Mounting Hole Diameter "B", mm [in.]
PTH-A	3.4 [0.134]
PTH-B	3.0 [0.118]
PTH-C	5.0 [0.197]
PTH-D	5.3 [0.209]
PTH-E	5.2 [0.205]
PTH-F	5.8 [0.228] x 9.7 [0.382] Quarter-Turn Mount

Fig. 1

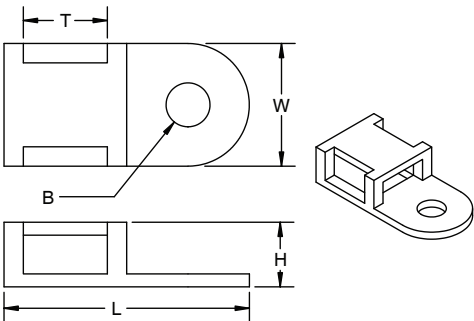


Fig. 2

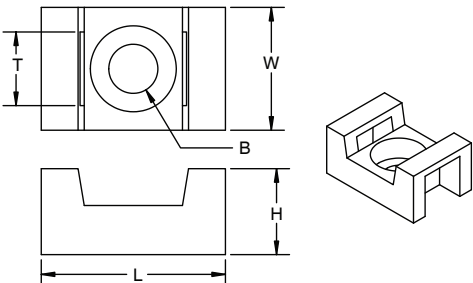


Fig. 3



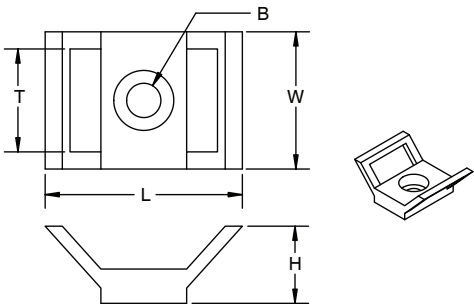


Fig. 4

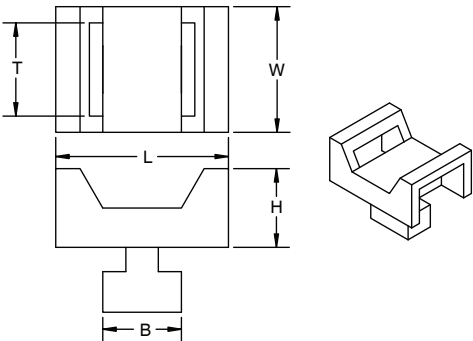

Plastic Cable Ties

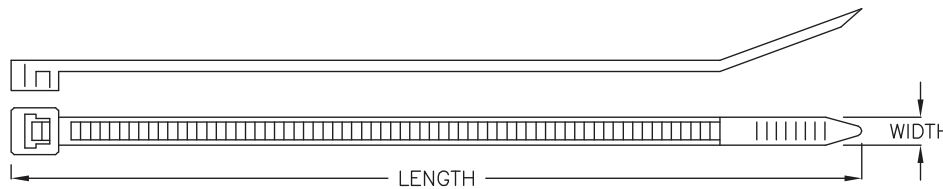

RoHS COMPLIANT



Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Natural
UL Listed: All Part Numbers

Available only with purchase of Cable Tie Bases

Part Number	Length, mm [in.]	Width, mm [in.]	Max. Bundle Dia., mm [in.]	Min. Loop Tensile Strength, Kgs [Lbs.]	Std. Pkg.
CT-YJ-80	80 [3.15]	2.2 [0.087]	17 [0.67]	8 [18]	1000
CT-YJ-90	90 [3.54]	2.5 [0.098]	21 [0.83]	8 [18]	1000
CT-YJ-98	98 [3.86]	2.5 [0.098]	22 [0.87]	8 [18]	1000
CT-YJ-100	100 [3.94]	2.5 [0.098]	23 [0.91]	8 [18]	1000
CT-YJ-102	102 [4.02]	3.6 [0.142]	22 [0.87]	18 [40]	500
CT-YJ-115	115 [4.53]	4.8 [0.189]	29 [1.14]	23 [51]	500
CT-YJ-120	120 [4.72]	2.5 [0.098]	30 [1.18]	8 [18]	1000
CT-YJ-122	122 [4.80]	3.6 [0.142]	29 [1.14]	18 [40]	500
CT-YJ-140	140 [5.51]	4.8 [0.189]	34 [1.34]	23 [51]	500
CT-YJ-142	142 [5.59]	3.6 [0.142]	34 [1.34]	18 [40]	500
CT-YJ-142S	142 [5.59]	2.5 [0.098]	36 [1.42]	8 [18]	1000
CT-YJ-148	148 [5.83]	4.8 [0.189]	36 [1.42]	54 [119]	100
CT-YJ-160	160 [6.30]	2.5 [0.098]	42 [1.65]	8 [18]	1000
CT-YJ-162	162 [6.38]	4.8 [0.189]	42 [1.65]	23 [51]	500
CT-YJ-163	163 [6.42]	3.6 [0.142]	40 [1.57]	18 [40]	500
CT-YJ-178	178 [7.01]	9.0 [0.354]	45 [1.77]	80 [176]	100
CT-YJ-181	181 [7.13]	2.5 [0.098]	49 [1.93]	8 [18]	1000
CT-YJ-182	182 [7.17]	7.6 [0.299]	46 [1.81]	54 [119]	100
CT-YJ-185	185 [7.28]	3.6 [0.142]	47 [1.85]	18 [40]	500
CT-YJ-188	188 [7.40]	4.8 [0.189]	49 [1.93]	23 [51]	500
CT-YJ-201	201 [7.91]	4.8 [0.189]	53 [2.09]	23 [51]	500
CT-YJ-203	203 [7.99]	3.6 [0.142]	55 [2.17]	18 [40]	500
CT-YJ-203S	203 [7.99]	2.5 [0.098]	56 [2.20]	8 [18]	1000
CT-YJ-215	215 [8.46]	7.6 [0.299]	59 [2.32]	54 [119]	100
CT-YJ-216	216 [8.50]	4.8 [0.189]	58 [2.28]	23 [51]	500
CT-YJ-229	229 [9.02]	9.0 [0.354]	61 [2.40]	80 [176]	100
CT-YJ-232	232 [9.13]	3.6 [0.142]	63 [2.48]	18 [40]	500
CT-YJ-242	242 [9.53]	4.8 [0.189]	66 [2.60]	23 [51]	500
CT-YJ-254	254 [10.00]	7.6 [0.299]	71 [2.80]	54 [119]	100
CT-YJ-263	263 [10.35]	3.6 [0.142]	73 [2.87]	18 [40]	500
CT-YJ-266	266 [10.47]	4.8 [0.189]	72 [2.83]	23 [51]	500
CT-YJ-280	280 [11.02]	9.0 [0.354]	77 [3.03]	80 [176]	100
CT-YJ-292	292 [11.50]	4.8 [0.189]	82 [3.23]	23 [51]	500
CT-YJ-293	293 [11.54]	7.6 [0.299]	84 [3.31]	54 [119]	100
CT-YJ-295	295 [11.61]	3.6 [0.142]	83 [3.27]	18 [40]	500
CT-YJ-329	329 [12.95]	9.0 [0.354]	93 [3.66]	80 [176]	100
CT-YJ-330	330 [12.99]	4.8 [0.189]	93 [3.66]	23 [51]	500
CT-YJ-331	331 [13.03]	3.6 [0.142]	96 [3.78]	18 [40]	500


Part Number	Length, mm [in.]	Width, mm [in.]	Max. Bundle Dia., mm [in.]	Min. Loop Tensile Strength, Kgs [Lbs.]	Std. Pkg.
CT-YJ-332	332 [13.07]	7.6 [0.299]	95 [3.74]	54 [119]	100
CT-YJ-368	368 [14.49]	4.8 [0.189]	106 [4.17]	23 [51]	500
CT-YJ-368L	368 [14.49]	7.6 [0.299]	109 [4.29]	54 [119]	100
CT-YJ-370	370 [14.57]	3.6 [0.142]	108 [4.25]	18 [40]	500
CT-YJ-382	382 [15.04]	9.0 [0.354]	110 [4.33]	80 [176]	100
CT-YJ-410	410 [16.14]	4.8 [0.189]	122 [4.80]	23 [51]	500
CT-YJ-420	420 [16.54]	7.6 [0.299]	124 [4.88]	54 [119]	100
CT-YJ-450	450 [17.72]	4.8 [0.189]	135 [5.31]	23 [51]	500
CT-YJ-458	458 [18.03]	9.0 [0.354]	135 [5.31]	80 [176]	100
CT-YJ-470	470 [18.50]	7.6 [0.299]	140 [5.51]	54 [119]	100
CT-YJ-520	520 [20.47]	7.6 [0.299]	156 [6.14]	54 [119]	100
CT-YJ-530	530 [20.87]	9.0 [0.354]	155 [6.10]	80 [176]	100
CT-YJ-655	655 [25.79]	9.0 [0.354]	194 [7.64]	80 [176]	100
CT-YJ-780	780 [30.71]	9.0 [0.354]	234 [9.21]	80 [176]	100
CT-YJ-815	815 [32.09]	9.0 [0.354]	247 [9.72]	80 [176]	100

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis


Spiral Harness Wrap

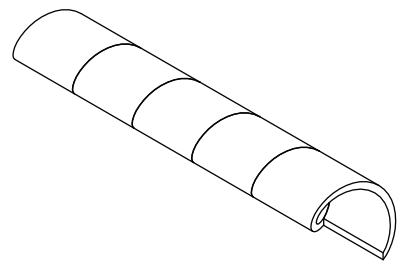

RoHS COMPLIANT

Specifications:


Material: Polyethylene
UL Rating: 94V-2
Color: Natural Clear
Black

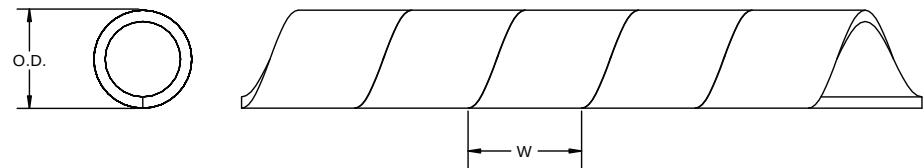

Part Number	"O.D.", mm [in.]	Spiral Pitch "W", mm [in.]	Wrapping Diameter Range, mm [in.]	Color	Package
SHW-03	3.0 [0.118]	4.0 [0.157]	1.5 [0.059] - 18.0 [0.709]	Clear/Black	Standard: 10m [33 Ft.] Special Order Only: 33m [100 Ft.] Spool
SHW-06	4.5 [0.177]	7.0 [0.276]	3.2 [0.126] - 50.0 [1.969]		
SHW-06L	6.2 [0.244]	7.0 [0.276]	4.1 [0.161] - 50.0 [1.969]		
SHW-08	8.0 [0.315]	10.8 [0.425]	6.0 [0.236] - 60.0 [2.362]		
SHW-10	10.0 [0.394]	11.4 [0.449]	7.5 [0.295] - 60.0 [2.362]		
SHW-12	12.0 [0.472]	13.9 [0.547]	9.0 [0.354] - 65.0 [2.560]		
SHW-15	15.0 [0.591]	15.0 [0.591]	12.0 [0.472] - 70.0 [2.756]		
SHW-19	19.0 [0.748]	18.2 [0.717]	15.0 [0.591] - 100.0 [3.937]		
SHW-24	24.0 [0.945]	19.6 [0.772]	20.0 [0.787] - 130.0 [5.120]	Clear	Standard: 2m [6.6 Ft.]
SHW-30	30.0 [1.181]	43.0 [1.693]	26.0 [1.024] - 160.0 [6.300]		

Plastic Continuous Grommet


Polyethylene Grommet Strip



RoHS COMPLIANT

Specifications:

Material: Polyethylene (PE)
UL Rating: 94V-2
Color: Natural Clear
 Black(Special Order)



Part Number	Inside Width "I.W." mm [in.]	Outside Width "O.W." mm [in.]	Inside Height "I.H." mm [in.]	Outside Height "O.H." mm [in.]	Panel Thickness Range mm [in.]	Package
PCG-06	0.6 [0.024]	2.6 [0.102]	3.8 [0.150]	4.8 [0.189]	0.4 [0.016] - 0.6 [0.024]	Standard: 10m [33 Ft.] Special Order Only: 33m [100 Ft.] Spool
PCG-08	0.8 [0.031]	2.8 [0.110]	3.8 [0.150]	4.8 [0.189]	0.6 [0.024] - 0.8 [0.031]	
PCG-10	1.0 [0.039]	4.0 [0.157]	3.9 [0.154]	5.3 [0.209]	0.9 [0.035] - 1.0 [0.039]	
PCG-12	1.2 [0.047]	3.7 [0.146]	3.9 [0.154]	5.4 [0.213]	1.1 [0.043] - 1.2 [0.047]	
PCG-16	1.6 [0.063]	4.5 [0.177]	3.9 [0.154]	5.3 [0.209]	1.3 [0.051] - 1.6 [0.063]	
PCG-20	2.0 [0.079]	5.0 [0.197]	3.9 [0.154]	5.3 [0.209]	1.7 [0.067] - 2.0 [0.079]	
PCG-24	2.4 [0.094]	5.2 [0.205]	3.9 [0.154]	5.3 [0.209]	2.0 [0.079] - 2.4 [0.094]	
PCG-30	3.0 [0.118]	6.0 [0.236]	5.0 [0.197]	6.5 [0.256]	2.4 [0.094] - 3.0 [0.118]	
PCG-40	4.0 [0.157]	7.2 [0.283]	4.3 [0.169]	6.5 [0.256]	3.0 [0.118] - 4.0 [0.157]	

Nylon Round Hole Plug



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black

Fig. 1





Fig. 2



Part Number	Max. Chassis Thk., mm [in.]	Hole Dia. in Chassis, mm [in.]	Cap Dia. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Standard Package
Refer to Fig. 1 for Drawing						
PCP-M-4	1.6 [0.063]	4.7-4.9 [0.185-0.193]	6.0 [0.236]	1.8 [0.071]	5.2 [0.205]	2000
PCP-M-5	1.0 [0.039]	5.0-5.0 [0.195-0.197]	7.5 [0.295]	1.3 [0.051]	5.7 [0.224]	
PCP-M-6	1.6 [0.063]	6.3-6.5 [0.248-0.256]	7.6 [0.299]	1.8 [0.071]	5.6 [0.220]	
PCP-M-6A	1.6 [0.063]	6.2-6.5 [0.244-0.256]	8.0 [0.315]	1.9 [0.073]	8.0 [0.315]	1000
PCP-M-7	1.6 [0.063]	7.0-7.1 [0.276-0.280]	11.0 [0.433]	1.9 [0.075]	7.0 [0.276]	
PCP-M-8	1.6 [0.063]	7.6-8.0 [0.299-0.315]	9.5 [0.374]	1.8 [0.071]	6.0 [0.236]	
PCP-M-9	1.2 [0.047]	9.5-9.6 [0.374-0.378]	13.0 [0.512]	2.0 [0.079]	6.5 [0.256]	
PCP-M-10	1.4 [0.055]	9.6-10.0 [0.378-0.394]	13.0 [0.512]	1.8 [0.071]	6.0 [0.236]	
PCP-M-11A	1.4 [0.055]	11.5-11.6 [0.451-0.455]	18.6 [0.732]	2.0 [0.079]	7.0 [0.276]	500
PCP-M-13	2.1 [0.083]	12.7-13.0 [0.500-0.512]	17.0 [0.669]	2.3 [0.091]	8.0 [0.315]	
PCP-M-16	2.0 [0.079]	15.9-16.0 [0.626-0.630]	20.0 [0.787]	2.3 [0.091]	7.7 [0.303]	
Refer to Fig. 2 for Drawing						
PCP-M-19	3.2 [0.126]	18.9-19.0 [0.744-0.748]	23.5 [0.925]	3.5 [0.138]	10.5 [0.413]	500
PCP-M-22	3.0 [0.118]	21.9-22.0 [0.862-0.866]	26.0 [1.024]	3.4 [0.134]	9.6 [0.378]	
PCP-M-25	3.2 [0.126]	25.4-25.6 [1.000-1.008]	28.0 [1.102]	4.0 [0.157]	12.7 [0.500]	
PCP-M-28A	3.5 [0.138]	28.3-28.4 [1.114-1.118]	32.0 [1.260]	3.9 [0.154]	13.1 [0.516]	200
PCP-M-30	3.2 [0.126]	30.5-30.6 [1.201-1.205]	34.0 [1.339]	4.0 [0.157]	13.0 [0.512]	
PCP-M-32	2.2 [0.087]	32.0-32.1 [1.260-1.264]	35.7 [1.406]	2.6 [0.102]	13.0 [0.512]	

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis


Nylon Closed Snap Bushing



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black
UL Listed: See Logo



Part Number	Panel Thickness, mm [in.]	Hole Dia. In Panel, ø, mm [in.]	Dia. "A", ø, mm [in.]	Dia. "B", ø, mm [in.]	Ref. "C", mm [in.]	Standard Package
PCP-SB-0305	1.6-1.7 [0.063-0.067]	ø4.8 [0.189]	ø6.5 [0.256]	ø3.2 [0.126]	6.0 [0.236]	1000
PCP-SB-0710	0.8-1.8 [0.031-0.071]	ø10.0 [0.394]	ø12.1 [0.476]	ø7.2 [0.283]	6.6 [0.260]	
PCP-SB-1013	0.8-3.0 [0.031-0.118]	ø13.0 [0.512]	ø15.3 [0.602]	ø10.2 [0.402]	9.1 [0.358]	
PCP-SB-1316	1.4-3.5 [0.055-0.138]	ø16.0 [0.630]	ø18.0 [0.709]	ø12.8 [0.504]	10.4 [0.409]	500
PCP-SB-1316K	0.8-1.8 [0.031-0.071]	ø16.0 [0.630]	ø18.0 [0.709]	ø12.8 [0.504]	10.4 [0.409]	
PCP-SB-1519	1.0-3.0 [0.039-0.118]	ø19.0 [0.748]	ø21.7 [0.854]	ø15.3 [0.602]	11.1 [0.437]	
PCP-SB-1822	0.9-2.3 [0.035-0.091]	ø22.0 [0.866]	ø24.8 [0.976]	ø18.2 [0.717]	11.5 [0.453]	200
PCP-SB-2428	1.0-3.3 [0.039-0.130]	ø28.0 [1.102]	ø31.5 [1.240]	ø24.1 [0.949]	11.3 [0.445]	
PCP-SB-2530	1.0-3.1 [0.039-0.122]	ø30.0 [1.181]	ø33.0 [1.299]	ø25.0 [0.984]	11.5 [0.453]	
PCP-SB-2634	1.0-2.8 [0.039-0.110]	ø34.2 [1.346]	ø38.0 [1.496]	ø26.2 [1.031]	11.5 [0.453]	100
PCP-SB-3338	6.4-6.4 [0.252-0.252]	ø38.1 [1.500]	ø41.2 [1.622]	ø33.3 [1.311]	14.3 [0.563]	200

Nylon Closed Snap Bushing


Low Profile Design for Thin Chassis



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black
UL Listed: See Logo

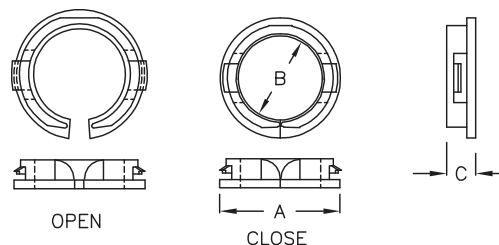

Part Number	Panel Thickness, mm [in.]	Hole Dia. In Panel, ø, mm [in.]	Dia. "A", ø, mm [in.]	Dia. "B", ø, mm [in.]	Ref. "C", mm [in.]	Standard Package
PCP-SA-0407A	0.7-0.9 [0.028-0.035]	ø6.8-7.0 [0.268-0.276]	ø9.8 [0.386]	ø4.8 [0.189]	5.0 [0.197]	1000
PCP-SA-1013A	1.0-1.5 [0.039-0.059]	ø13.0 [0.512]	ø15.5 [0.610]	ø9.6 [0.378]	5.4 [0.213]	
PCP-SA-1013C	1.9-2.0 [0.075-0.079]	ø13.0 [0.512]	ø15.5 [0.610]	ø9.6 [0.378]	5.9 [0.232]	
PCP-SA-1316A	1.0-1.4 [0.039-0.055]	ø16.0 [0.630]	ø18.4 [0.724]	ø12.5 [0.492]	5.4 [0.213]	500
PCP-SA-1519A	0.8-1.0 [0.031-0.039]	ø19.0 [0.748]	ø21.8 [0.858]	ø14.9 [0.587]	5.7 [0.224]	
PCP-SA-1822A	0.8-1.0 [0.031-0.039]	ø22.0 [0.866]	ø24.6 [0.969]	ø17.6 [0.693]	5.6 [0.220]	
PCP-SA-2024A1	0.8-1.0 [0.031-0.039]	ø24.0 [0.945]	ø26.0 [1.024]	ø20.0 [0.787]	5.4 [0.213]	200
PCP-SA-2024A	1.0-1.2 [0.039-0.047]	ø24.0 [0.945]	ø26.0 [1.024]	ø20.0 [0.787]	5.3 [0.209]	
PCP-SA-2327A	0.4-1.0 [0.016-0.039]	ø27.0-27.2 [1.063-1.071]	ø30.6 [1.205]	ø23.0 [0.906]	6.0 [0.236]	
PCP-SA-2529A	0.4-1.1 [0.016-0.043]	ø29.0 [1.142]	ø32.6 [1.283]	ø25.0 [0.984]	7.0 [0.276]	

all dimension units in millimeter (mm) unless noted otherwise

Nylon Open Snap Bushing



RoHS COMPLIANT

Specifications:

Material: Nylon 6/6
UL Rating: 94V-2
Color: Black
UL Listed: See  Logo

Fig. 1


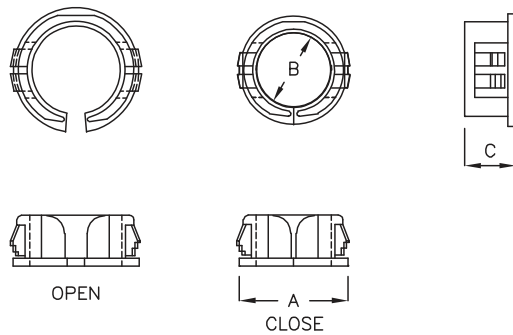


Fig. 2

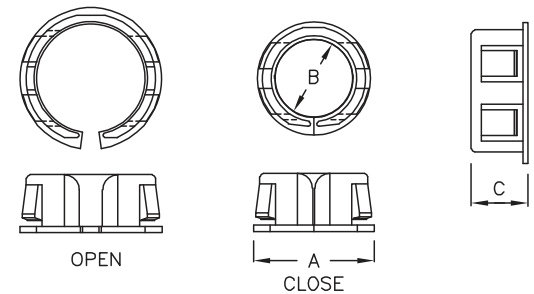

Part Number		Panel Thickness, mm [in.]	Hole Dia. In Panel, ø, mm [in.]	Closed Dia. "A", ø, mm [in.]	Dia. "B", ø, mm [in.]	Ref. "C", mm [in.]	Standard Package
Refer to Fig. 1 for Drawing							
PCP-SB-0609A		0.7-1.7 [0.028-0.067]	ø9.5 [0.374]	ø11.4 [0.449]	ø6.6 [0.260]	6.5 [0.256]	1000
PCP-SB-1013A		0.8-3.5 [0.031-0.138]	ø13.0 [0.512]	ø14.9 [0.587]	ø9.0 [0.354]	10.5 [0.413]	500
PCP-SB-1216A		0.7-3.3 [0.028-0.130]	ø16.0 [0.630]	ø18.6 [0.732]	ø12.3 [0.484]	10.0 [0.394]	
PCP-SB-1316A		1.2-3.5 [0.047-0.138]	ø16.0 [0.630]	ø18.0 [0.709]	ø10.5 [0.413]	10.5 [0.413]	
PCP-SB-1519A		1.2-3.3 [0.047-0.130]	ø19.0 [0.748]	ø20.6 [0.811]	ø14.4 [0.567]	11.0 [0.433]	200
PCP-SB-1720A		0.8-1.0 [0.031-0.039]	ø20.0 [0.787]	ø23.5 [0.925]	ø17.0 [0.669]	7.2 [0.283]	500
PCP-SB-1822A		1.0-3.5 [0.039-0.138]	ø22.0 [0.866]	ø24.8 [0.976]	ø17.3 [0.681]	11.5 [0.453]	200
PCP-SB-1922A		0.8-1.2 [0.031-0.047]	ø22.0 [0.866]	ø25.0 [0.984]	ø19.0 [0.748]	7.4 [0.291]	500
Refer to Fig. 2 for Drawing							
PCP-SB-2024A		0.8-1.2 [0.031-0.047]	ø24.0 [0.945]	ø26.4 [1.039]	ø20.0 [0.787]	11.3 [0.445]	500
PCP-SB-2126A		0.8-1.2 [0.031-0.047]	ø25.4-25.6 [1.000-1.008]	ø27.7 [1.091]	ø21.1 [0.831]	8.0 [0.315]	
PCP-SB-2228A		0.8-1.2 [0.031-0.047]	ø27.8 [1.094]	ø28.8 [1.134]	ø22.0 [0.866]	9.0 [0.354]	200

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

Vaisis

vaisis.com

Contact Us:

Vaisis Inc.

832 Magnolia Ave
Suite 11
Pasadena, CA 91106
United States

Phone: (626)795-6696

Fax: (626)795-6896

Email: sales@vaisis.com

vaisis.com